

davide groppi

HANDBOOK 2024 - AU

INDEX

WIRELESS	15	SUSPENSION	143	CEILING	313	TRACKS - PROFILES	473
35MM	17	CATHODE	145	ASINTOTO	315	BINARIO TRIFASE	475
BUGIA	21	FOSBURY	153	AURORA	321	COLIBRI	489
PoPuP	25	LED IS MORE	157	DOT PL 51	325	FRAMELESS	499
POST PRANDIUM	29	LOUIS XIV	161	HAKO PL	329	LIGHTLINE 0808	507
QuiQuoQua	35	MAGIA	167	MINI PL 51	333	LIGHTLINE 1010	512
TeTaTeT	39	MISS	179	NULLA PL	337	LIGHTLINE 1508	516
TeTaTeT Flûte	45	MOON	185	PUNTO PL	341	LIGHTLINE 2612	520
VIS À VIS	49	NEURO	193	PUNTO 2 PL	345	LIGHTLINE 7454	524
		OVO	197	SANMARTINO	349		
		OVONELPIATTO	201	SPY PL	353	OUTDOOR	529
TABLE	53	REFLEX S	205	TRICK TRACK	357	BELLADINOTTE	531
ABA 45	55	SHANGHAI	209			BUBKA	535
ANIMA	59	SIMBIOSI	213	RECESSED	361	BUBKA BOLLARD	539
CALVINO	63	SOTTILE	217	DOT R	363	BUIO - TRIMLESS	544
FM	67	SOTTOSOPRA	223	MINI 51	369	BUIO - TRIM	548
MOON T	71	SPY	227	MINI BIT 51	373	BUIO - SPOT	552
MORSETTO	77			MIRA R	377	CHILLOUT	561
PIGRECO	83	WALL	231	NULLA	381	GRILLO	565
		DOT P	233	PUNTO	391	HAZARD	569
FLOOR	87	DUET	241			IMU	575
ABA 120	89	EDISON'S NIGHTMARE	245	SYSTEMS	397	JULIET	579
BANNER	93	FILM	249	ENDLESS	399	LENTA	583
HASHI	97	FOIL	253	FLASH	429	NEURO OUTDOOR	587
MASAI	101	FOLDER	257	INFINITO	445	NUIT	591
MISTER	107	LINET	261	OHM	457	ORIGINE OUTDOOR	595
MOON F	111	MIRA	265	UTOPIA	467	Q ²	599
MOVIE	115	MIRA MAGNETIC	269			SAMPEI 440 OUTDOOR	603
ORIGINE	119	MORSETTO P	273			SHOJI OUTDOOR	607
PABLO	125	PIÙ	277			SPOT OUTDOOR	611
Q	129	RAIL	281				
SAMPEI	133	REFLEX	285			BULBS	614
SHOJI	139	SHADE	289			DG111 LED MODULES	615
		SOL 1	293			DRIVERS	616
		SOL 2	297			COMMON ACCESSORIES	620
		SPOT	301			SUSPENSION KITS	622
		TOAST	309			COMMERCIAL TERMS	624

INDEX

Our codification system consists of a fifteen-digit structure defined as follows:

1	A	3	0	0	0	3	0	0		2	7		0	0
PRODUCT FAMILY					FINISH		INTERNAL USE ONLY		-	COLOUR TEMPERATURE		-	ELECTRIFICATION	

The Davide Groppi price list is a confidential document and cannot be disclosed. In this document the drawings and technical information are to be considered indicative. All product features and technical measurements are available on our website davidegropi.com

Finish

0	0	Standard
0	1	Polished Chrome
0	3	Matt White
0	4	Matt Black
0	8	Brushed Brass
1	0	Stainless Steel
1	3	Black Brushed Stainless Steel
1	4	Brushed Chrome
1	5	Natural Brass
1	8	Matt Gold
1	9	Polished Gold
2	6	Total Black
2	7	Gravity Black
2	8	Polished Black Chrome
2	9	Brushed Bronze
3	2	Copper Oxide
3	4	Matt White - Black Bicolour
3	6	Brushed Black
3	8	Blasted Inox

Colour temperature

0	0	Light source not included
2	2	2200K
2	7	2700K
3	0	3000K
9	6	2700K / 6500K (Tunable White)
9	8	RGBW (Warm White)
9	9	RGB

Electrification



0	0	ON/OFF
0	1	DALI
0	2	TRIAC/IGBT
0	3	1-10V
0	4	PUSH
0	5	DIM (DALI - PUSH - 1-10V - TRIAC)
0	6	Dimmer on board
0	7	DALI - PUSH - 1-10V
2	0	CLASS III
4	0	ENDLESS
4	1	ENDLESS CASAMBI

General data on the product

Mounting - Lighting - Use - Material - Finish - Note

Model specifications









Technical data - Certifications - Codes

NULLA		Davide Groppi / 2010	
Recessed / Direct / Indoor			
Material	Metal		
Finish	.00 Standard		
Note	Recessed luminaires: Visible 18/25 mm diameter hole. NULLA 18 and NULLA 25: lamp extractable for maintenance.		
			
NULLA - 23* 14W 24V DC 2700K - 425lm / 3000K - 458lm CRi >90 Beam: 23° UGR <19 Driver not included CE Ⓢ IP20/IP65	Standard - 2700K Standard - 3000K	1A410000.27.20 1A410000.30.20	325,00 € 325,00 €
			
NULLA - 22* 14W 24V DC 2700K - 538lm / 3000K - 579lm CRi >90 Beam: 22° UGR <19 Driver not included CE Ⓢ IP20/IP65	Standard - 2700K Standard - 3000K	1A210000.27.20 1A210000.30.20	325,00 € 325,00 €
398			

Compulsory and optional accessories

Accessories finishes and specifications - Codes

Reference model

NULLA		Davide Groppi / 2010	
Compulsory accessories / Accessori obbligatori			
Installation kits / Kit d'installazione			
	Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm Matt Black Cut-out Ø 21 mm Minimum space for mounting 100 mm IP65	NULLA 1A2200400.00.00	Not included 95,00 €
	Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm Matt Black Cut-out Ø 22 mm Minimum space for mounting 190 mm	NULLA 18 1A2210400.00.00	Not included 90,00 €
	Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm Matt Black Cut-out Ø 25 mm Minimum space for mounting 190 mm	NULLA 25 1A2170400.00.00	Not included 95,00 €
	Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm Matt Black Cut-out Ø 35 mm Minimum space for mounting 190 mm IP65	NULLA 25 1A3980400.00.00	Not included 45,00 €
	Plasterboard flange (bottom) = 12,5 mm / Flangia (da sotto) per cartongesso = 12,5 mm Matt Black Cut-out Ø 35 mm Minimum space for mounting 190 mm IP65	NULLA 25 1A4960400.00.00	Not included 45,00 €
Drivers / Alimentatori			
	Driver / Alimentatore 220-240V(100-127V) 24V/16W(15W)IP20(DALI)	12024180.24	Not included 70,00 €
	Driver / Alimentatore 220-240V(100-127V) 24V/20W(15W)IP20(PUSH)	120240870.24	Not included 60,00 €
	Driver / Alimentatore 220-240V 24V/20W/IP20/TRIAC/IGBT	120240850.24	Not included 60,00 €
400			



Class II appliance: appliance whose protection against electric shock is not only relevant to the main insulation, but also includes additional safety measures, such as dual insulation or reinforced insulation. These measures do not include ground devices as protection and do not depend on the installation conditions.



Class III appliance: appliance whose safety against electric shock is based on safe extra low voltage power supply. Compliance with legislation is guaranteed only if the appliance is powered by a SELV safety transformer/driver in compliance with legislation in force. The appliance must not be connected to ground conductors.



Degree of protection against access of foreign bodies, dust and water.



Appliance with this symbol can only use low pressure bulbs or bulbs with safety glass.



Do not use cold light lamps.



To prevent the risk of fire, maintain the minimum distance indicated from the bulb with lighting objects. This distance should be measured along the optical axis of the appliance to the closest lighting object.



Color Rendering Index: the degree of colour distortion under a given light source in comparison with a reference light source. The optimum colour rendition index is Ra=100.



The luminous flux, measured in lumen, indicates the quantity of light perceived by the human eye emitted by a light source. In Davide Groppi lights with an integrated module, the delivered lumen flux is obtained from the photometric measurement. In lights with a lightbulb included, the luminous flux is indicated provided by the manufacturer of the lightbulb.



Luminaire designed to be powered by ENDLESS conductive tape.



Luminaire integrated with Casambi, the Bluetooth Low Energy (BLE) technology for lighting control.



Luminaire with Extradark comfort system. The Extradark system associates an optical TIR PMMA lens to an element that geometrically shields the light beam viewing angle to obtain highly uniform lighting and full beam control. The polished black light shield is used to control the mirror reflection of the light, perfectly controlling the unified glare rating (UGR* <19).

All Davide Groppi products, except those specifically indicated,
are equipped with electronic light sources (LED).
The selection of diodes is carried out with the utmost care to guarantee
the highest levels of performance and luminous uniformity.

WIRELESS

35MM

Alessandra Dallagiovanna - Davide Groppi / 2009

Those dear old slides. Nobody pays any attention to them anymore.
It's the smallest lamp in our collection.
It's an idea, a thought, a pendant, something you can wear.
The pulsating light and the images you choose to display on it
make 35MM unique and exceptional.




35MM

Alessandra Dallagiovanna - Davide Groppi / 2009

Objects / Diffuse / Wireless

Material Metal - Polycarbonate
Finish .00 Standard


Note Battery-operated wearable luminaire. Matt white front. Glossy black back.
Customised image not included. Intermittent light.



35MM
0,3W
ON/OFF
Batteries 2xCR2032 included
CE IP20

Standard - ON/OFF

|1A2640000.00.00 |

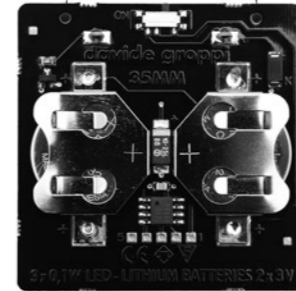

BUGIA

Daide Groppi / 2018



A lightweight and soft light.
A lamp designed to enjoy wonderful diffuse light but without an electrical cable.


BUGIA

Davide Groppi / 2018


Table / Diffuse / Wireless

Material Metal - Methacrylate
Finish .18 Matt Gold

Note Chargeable table luminaire. Matt white diffuser. Gold finish base. Battery life: 9 hours.



BUGIA


2W
3000K - 120lm
CRI >90
ON/OFF
Driver with plug not included
USB cable included
CE  IP20

Matt Gold - 3000K - ON/OFF

| 1A2351800.30.00 |

Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories



USB to USB-C cable		Included
Matt Black	Length 1 m	1Z0000132



PoPuP

Daide Groppi / 2016



Light*Music*Wireless

Created to give you both light and music any place, at any time.

PoPuP accompanies you during your unforgettable moments.

The sounds it produces are dynamic and of excellent quality.

Light and sound can also be enjoyed separately.

Listen to the light.


PoPuP

Davide Groppi / 2016

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .03 Matt White

Note Chargeable table luminaire and speaker. Magnetic fixing stem. Battery life: 12 hours light only and 30 hours audio only at medium volume.

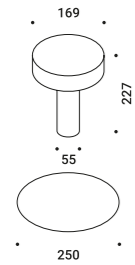

PoPuP


2W
 3000K - 183lm
 CRI >80
 ON/OFF
 5W Audio - 50-20000Hz
 Driver with plug included
 CE IP20

Matt White - 3000K - ON/OFF

|1A2610300.30.00 |

Optional accessories

Drivers




Driver with plug

Matt Black Input 110-240V - 50/60Hz
 Output 10000mAh - 4,2-14V DC
 18W - IP20

1Z1530030

Included

Other accessories



Rechargeable battery

Matt White 12V DC - NiMH 3700mAh

1A2620300.00.00

Included



POST PRANDIUM

Daide Groppi / 2023



During a meal with friends, a ladle is reused to scoop up the light
and serve it onto the table.

A project from many years ago, today in a new wireless version.

Archiproducts Design Award 2023


POST PRANDIUM

Davide Groppi / 2023

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .01 Polished Chrome

Note Chargeable table luminaire. Details with polished gold finish. Matt black base. Battery life: 9 hours.



POST PRANDIUM


2W
 3000K - 171lm
 CRI >90
 ON/OFF
 Driver with plug not included
 USB cable included
 CE IP20

Polished Chrome - 3000K - ON/OFF

| 1A4550100.30.00 |

Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories



USB to USB-C cable		Included
Matt Black	Length 1 m	1Z0000132





POST PRANDIUM





The light where you want it.

A unique suspension lamp with a rechargeable battery.

The light source is applied magnetically to a metal dish that hangs from the ceiling using a very thin steel wire. The effect is delicately elegant.

QuiQuoQua takes light where it is needed, without the limitation of electric wires.

QuiQuoQua


Davide Groppi / 2017

Suspension / Direct / Wireless

Material Metal - Methacrylate

Finish .03 Matt White

Note Chargeable suspension luminaire. Magnetic fixing LED module. Matt white rose. AISI 304 stainless steel suspension cable. Battery life: 8 hours.

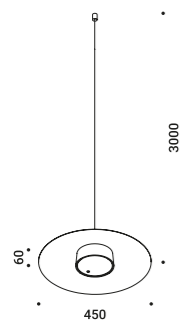

QuiQuoQua

5W

3000K - 345lm

CRI >80

ON/OFF

Driver with plug included


CE IP20

Matt White - 3000K - ON/OFF

1A2630300.30.00

Optional accessories

Drivers



Driver with plug


Included

Matt Black

Input 110-240V - 50/60Hz
Output 9V DC - 2A - 20W - IP20

1Z1120170

LED modules



LED module

Included

Matt Black

5W - 3000K - 345lm - CRI >80
Rechargeable lithium battery 9V DC
Li-Ion 5800mAh - Battery life 8 hours

1A0570400.30.00

Suspension kits




Sloped ceiling suspension kit

Not included

Nickel plated - 1 Piece

1A0510000.00.00



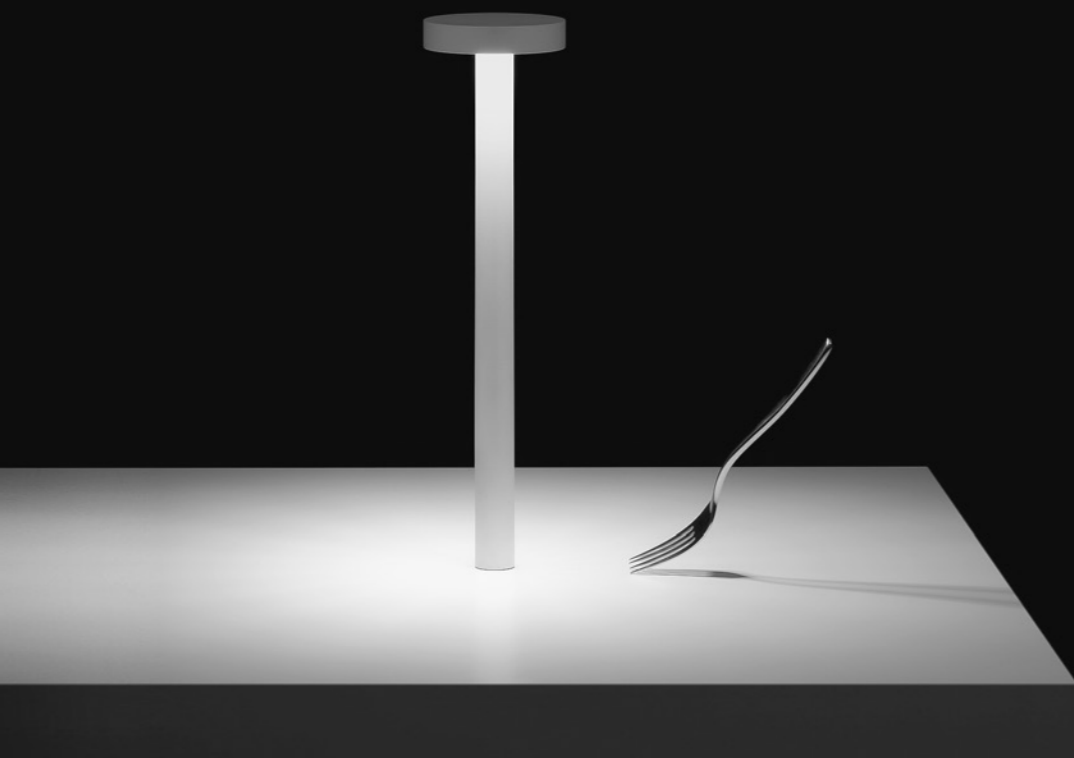


A timeless icon with an eye on the future.
Portable and rechargeable, the greatest expression of freedom.
With TeTaTeT, every table becomes a meeting place, a complete dining experience.
Its light caresses those it illuminates with pure emotion.
Equipped with Touch technology and a magnetic fixing base.
Mention of Honour XXIV Compasso d'Oro ADI Award, 2016



Table / Direct / Wireless

Material	ABS - Metal - Methacrylate		
Finish	.03 Matt White	.04 Matt Black	.18 Matt Gold

Note Chargeable table luminaire. Magnetic fixing stem. Touch ON/OFF.
Battery life: 12 hours.

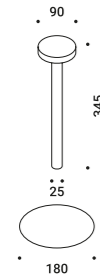


TeTaTeT

2W
2700K - 165lm / 3000K - 178lm
CRI >90
ON/OFF
Driver with plug included
CE IP20

Matt White - 2700K - ON/OFF	1A0310300.27.00
Matt White - 3000K - ON/OFF	1A0310300.30.00
Matt Black - 2700K - ON/OFF	1A0310400.27.00
Matt Black - 3000K - ON/OFF	1A0310400.30.00
Matt Gold - 2700K - ON/OFF	1A0311800.27.00
Matt Gold - 3000K - ON/OFF	1A0311800.30.00


Optional accessories

Drivers



Driver with plug		Included
Matt Black	Input 110-240V - 50/60Hz Output 6V DC - 1A - 6W - IP20	1Z0000073

Other accessories



Rechargeable battery		Included
Matt White	4,8V DC - NiMH 4300mAh	1A0430300.00.00
Matt Black	4,8V DC - NiMH 4300mAh	1A0430400.00.00
Matt Gold	4,8V DC - NiMH 4300mAh	1A0431800.00.00

Optional accessories

Other accessories



Table	Not included
Matt White	1A4020300.00.00
Matt Black	1A4020400.00.00



TeTaTeT Flûte

Davide Groppi / 2017



This is an evolution of our TeTaTeT lamp.
The lamp head is lightweight and appears to be floating in air.
The transparent stem brings to mind the glasses used in the classic "mise en place".
Magnetic fixing base.


TeTaTeT Flûte

Davide Groppi / 2017

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .03 Matt White

Note Chargeable table luminaire. Magnetic fixing transparent stem.
 Magnetic LED module. Battery life: 9 hours.



TeTaTeT Flûte

2W
 2700K - 167lm / 3000K - 180lm
 CRI >90
 ON/OFF
 Driver with plug not included
 USB cable included


CE IP20

Matt White - 2700K - ON/OFF
 Matt White - 3000K - ON/OFF

1A2360300.27.00
 1A2360300.30.00

Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

LED modules



LED module		Included
Matt White	2W - 2700K - 167lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5360300.27.00
	2W - 3000K - 180lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5360300.30.00

Davide Groppi / 2017

TeTaTeT Flûte

Optional accessories

Other accessories



USB to USB-C cable		Included
Matt Black	Length 1 m	1Z0000132



Table		Not included
Matt White		1A4020300.00.00
Matt Black		1A4020400.00.00

VIS À VIS

Michele Groppi / 2023



Vis à Vis is a magic trick, between technique and illusion.
Once again, we decided to take away, seeking only the light.
Transparency is the main feature of this battery-powered lamp.
Archiproducts Design Award 2023


VIS À VIS

Michele Groppi / 2023

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .00 Standard

Note Chargeable table luminaire. Transparent disc with refractive effect.
 Magnetic fixing LED module and transparent stem. Battery life: 9 hours.



VIS À VIS


2W
 2700K - 110lm / 3000K - 113lm
 CRI >90
 ON/OFF
 Driver with plug not included
 USB cable included
 CE IP20

Standard - 2700K - ON/OFF
 Standard - 3000K - ON/OFF

1A4530000.27.00
 1A4530000.30.00

Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

LED modules



LED module		Included
Standard	5W - 2700K - 110lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5370000.27.00
	2W - 3000K - 113lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5370000.30.00

Other accessories



USB to USB-C cable		Included
Matt Black	Length 1 m	1Z0000132



TABLE

ABA 45

Omar Carraglia / 2007



Inspired by the shape of a traditional lampshade.
The bulb is not shielded but displayed, and it peeks out from the shade.
Floor version available.


ABA 45

Omar Carraglia / 2007

Table / Diffuse / Indoor

Material Metal - Methacrylate
Finish .03 Matt White

Note Table luminaire. Dimmer on the cable. White cable.



ABA 45

Max 10W - E27
100-240V - 50/60Hz
Dimmer on board
Bulb not included
CE IP20 0.5m

Matt White - Dimmer on board

1A2700309.00.06

Optional accessories

Bulbs



LED - E27 - G125

Not included

220-240V - 7W - 360°
2700K - 806lm - CRI >80
Energy Efficiency E - Dimmable

1Y2080010





ANIMA

Davide Groppi - Giorgio Rava / 2021

A slender, light, ephemeral and abstract sculpture, it is a weightless ideogram. It's the emotion of an indirect light with an aesthetic poised between Scandinavian and Japanese design, two apparently distant cultures but, actually, very close.

At the top, an open circle, almost a hook for fishermen of the soul.

Selection for ADI Design Index 2022

AZ Award 2022

Archiproducts Design Award 2021


ANIMA

Davide Groppi - Giorgio Rava / 2021

Table-Floor / Indirect / Indoor

Material ABS - Carbon fiber - Metal
Finish .04 Matt Black

Note Table luminaire. Touch ON/OFF and adjustment. Black cable.



ANIMA


4W
 5V DC
 2700K - 575lm / 3000K - 589lm
 CRI >80
 Dimmer on board
 Driver with plug not included
 USB cable included
 CE IP20

Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A1090400.27.06
 1A1090400.30.06

Optional accessories

Drivers




Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories



USB to USB-C cable		Included
Matt Black	Length 1 m	1Z0000132



Power bank		Not included
	10000mAh/36Wh Output 5V DC Battery life 10 hours	1A1990000.00.00





CALVINO

Davide Groppi / 2018

Full and empty, shadow and light.
A circular mirror to be positioned as you please,
to both light and capture the surrounding space.
Born Series Award 2019


CALVINO

Davide Groppi / 2018

Table / Indirect / Indoor

Material Brass - Metal - Methacrylate - Mirror
Finish .00 Standard

Note Table luminaire. Disc with mirror finish adjustable in all directions. Matt blue rear disc. Matt black base. Brass stem. Dimmer on the cable. Black cable.



CALVINO


18W
 24V DC
 2700K - 1275lm / 3000K - 1372lm
 CRI >90
 Dimmer on board
 Driver with plug included
 CE IP20

Standard - 2700K - Dimmer on board
 Standard - 3000K - Dimmer on board

1A2710000.27.06
 1A2710000.30.06


Optional accessories

Drivers



Driver with plug		Included
Matt Black	Input 110-240V - 50/60Hz Output 24V DC - 18W - IP20	1Z0431020



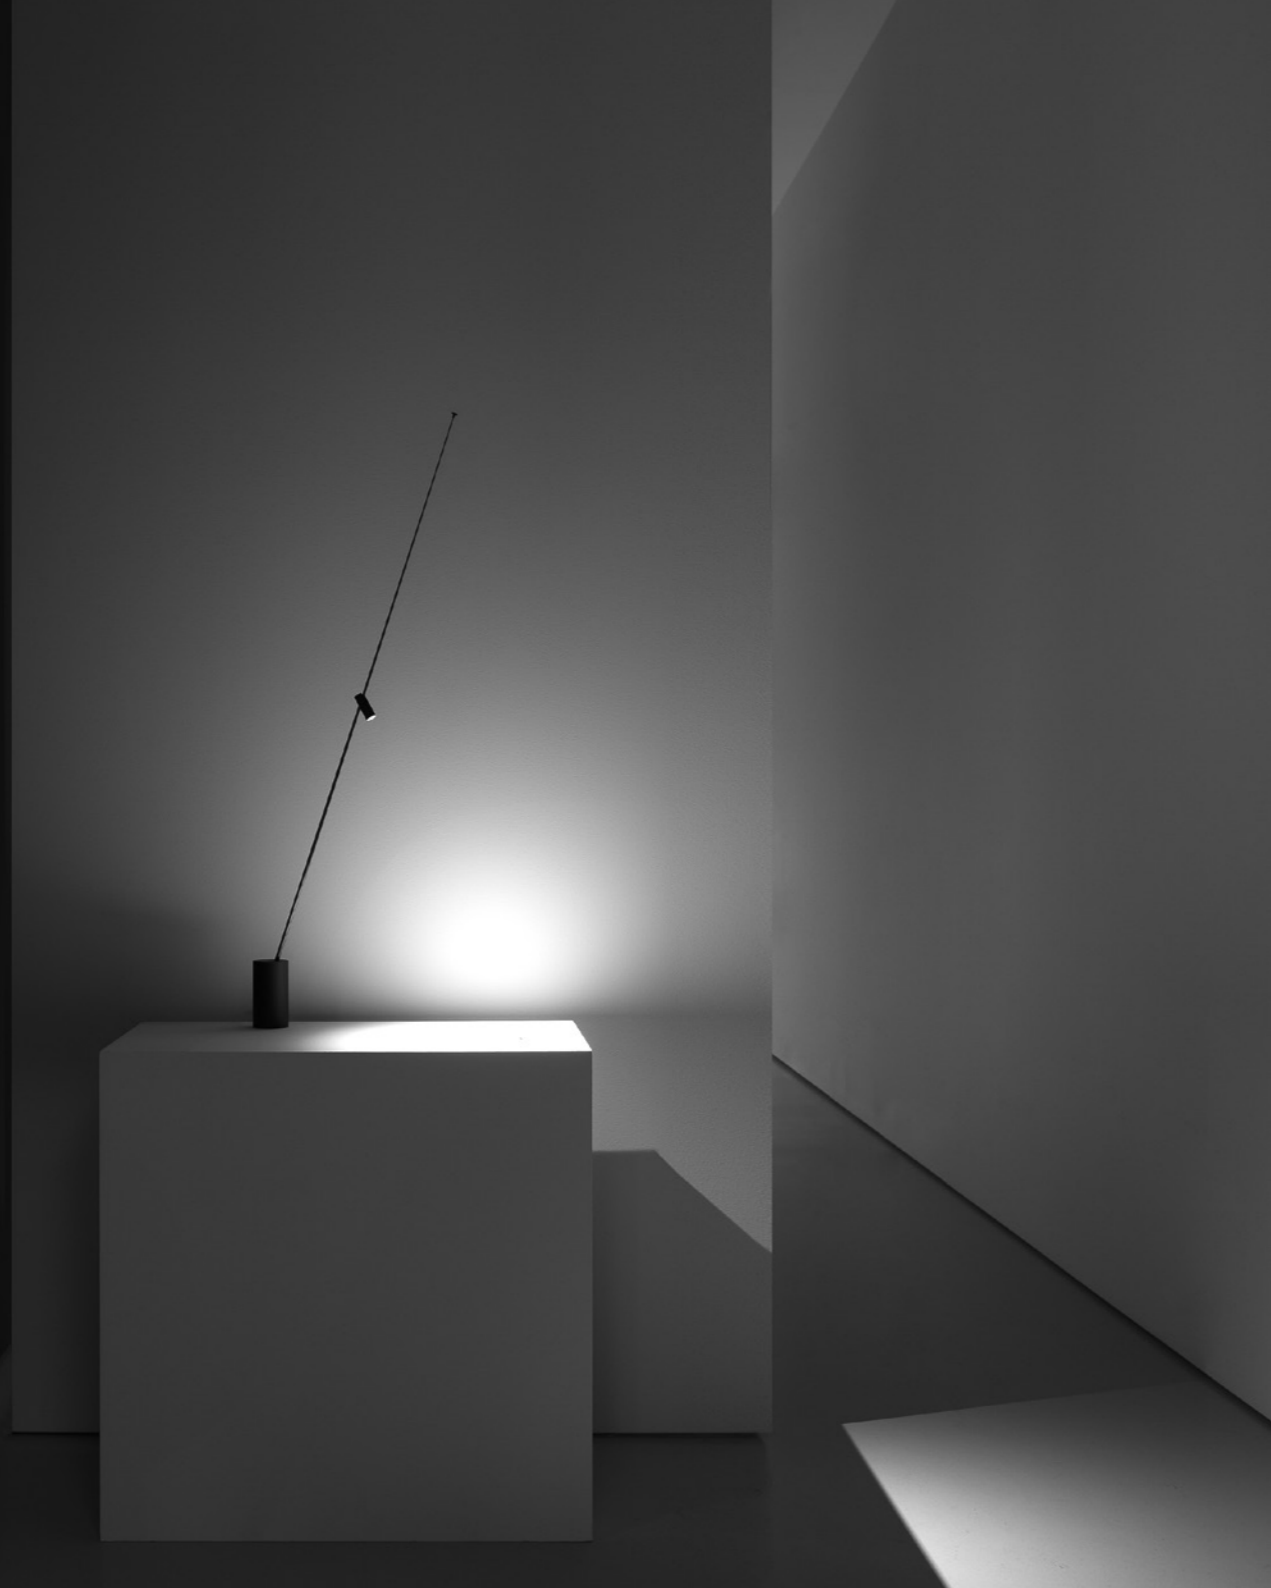

An antenna of light.


Antennas are mysterious, absolute and intrinsically beautiful, because their essentialness expresses nothing more than their function. A performing, adjustable and extremely comfortable light.

Selection for ADI Design Index 2023
Archiproducts Design Award 2022

Table / Direct / Indoor

Material Carbon fiber - Metal
Finish .04 Matt Black

Note Table luminaire. Adjustable along the vertical axis. ON/OFF and push control. Black cable.

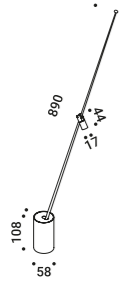

FM


1,5W
 5V DC
 2700K - 154lm / 3000K - 179lm
 CRI >90
 UGR <19
 Dimmer on board
 Driver with plug not included
 USB cable included
 CE IP20

Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A2440400.27.06
 1A2440400.30.06

Optional accessories

Drivers




Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories



USB to USB-C cable		Included
Matt Black	Length 1 m	1Z0000132



Power bank		Not included
	10000mAh/36Wh Output 5V DC Battery life 10 hours	1A1990000.00.00



MOON T

Daide Groppi / 2019



Moon was created from the dream of bringing the moon inside your own home.
The hand-made Japanese paper surface makes every lamp unique.
Suspension and floor versions also available.


MOON T

Davide Groppi / 2019

Table / Diffuse / Indoor

Material Japanese paper - Metal - PE
Finish .00 Standard

Note Table luminaire. PE and Japanese paper shade. Gold finish base. Dimmer on the cable. White cable. Compulsory moisture barrier bag packaging for air and sea shipping.



MOON T

Max 15W - E27
100-240V - 50/60Hz
Dimmer on board
Bulb not included
CE IP20

Standard - Dimmer on board

| 1A2690009.00.06 |

Optional accessories

Bulbs



LED - E27 - A60	Not included
220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790

Other accessories

Moisture barrier bag	Not included
Packaging for air and sea shipping	4A2690010







A lamp that can be positioned, balanced and turned,
but overall it produces a beautiful light on the table.
The oversized workshop-style clamp allows the light source to be positioned far from
where the lamp is attached to the table, using three adjustable arms.
A table lamp, but at the same time a suspended light.
Wall version also available.


MORSETTO

Davide Groppi / 2017

Table / Direct / Indoor

Material Metal
Finish .04 Matt Black

Note Table luminaire. Adjustable in all directions. Shiny red clamp. Dimmer on the cable. Black cable.

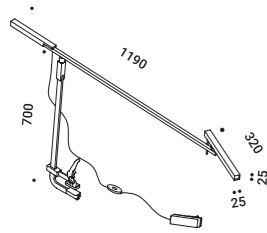

MORSETTO

13W
 24V DC
 2700K - 765lm / 3000K - 823lm
 CRI >90
 UGR <19
 Dimmer on board
 Driver with plug included




Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A2520400.27.06
 1A2520400.30.06

Optional accessories

Drivers



Driver with plug

Material	Input 110-240V - 50/60Hz Output 24V DC - 18W - IP20	Code	Included
Matt Black		1Z0431020	








A rigorous project in its design.
A dialogue between two essential, concrete and tangible materials: wood and glass.
Part frosted and part transparent, it moves feely on the base,
functioning both as diffuser and convex lens.

Table / Diffuse / Indoor

Material Glass - Oak wood
Finish .00 Standard

Note Table luminaire. Sanded glass ball. Oak wood base. Dimmer on the cable.
 Black cable.



PIGRECO


6,5W
 24V DC
 3000K - 450lm
 CRI >90
 Dimmer on board
 Driver with plug included
 CE IP20

Standard - 3000K - Dimmer on board

| 1A2600000.30.06 |

Optional accessories


Drivers



Driver with plug

Included

Matt Black	Input 110-240V - 50/60Hz Output 24V DC - 18W - IP20	1Z0431020
------------	--	-----------

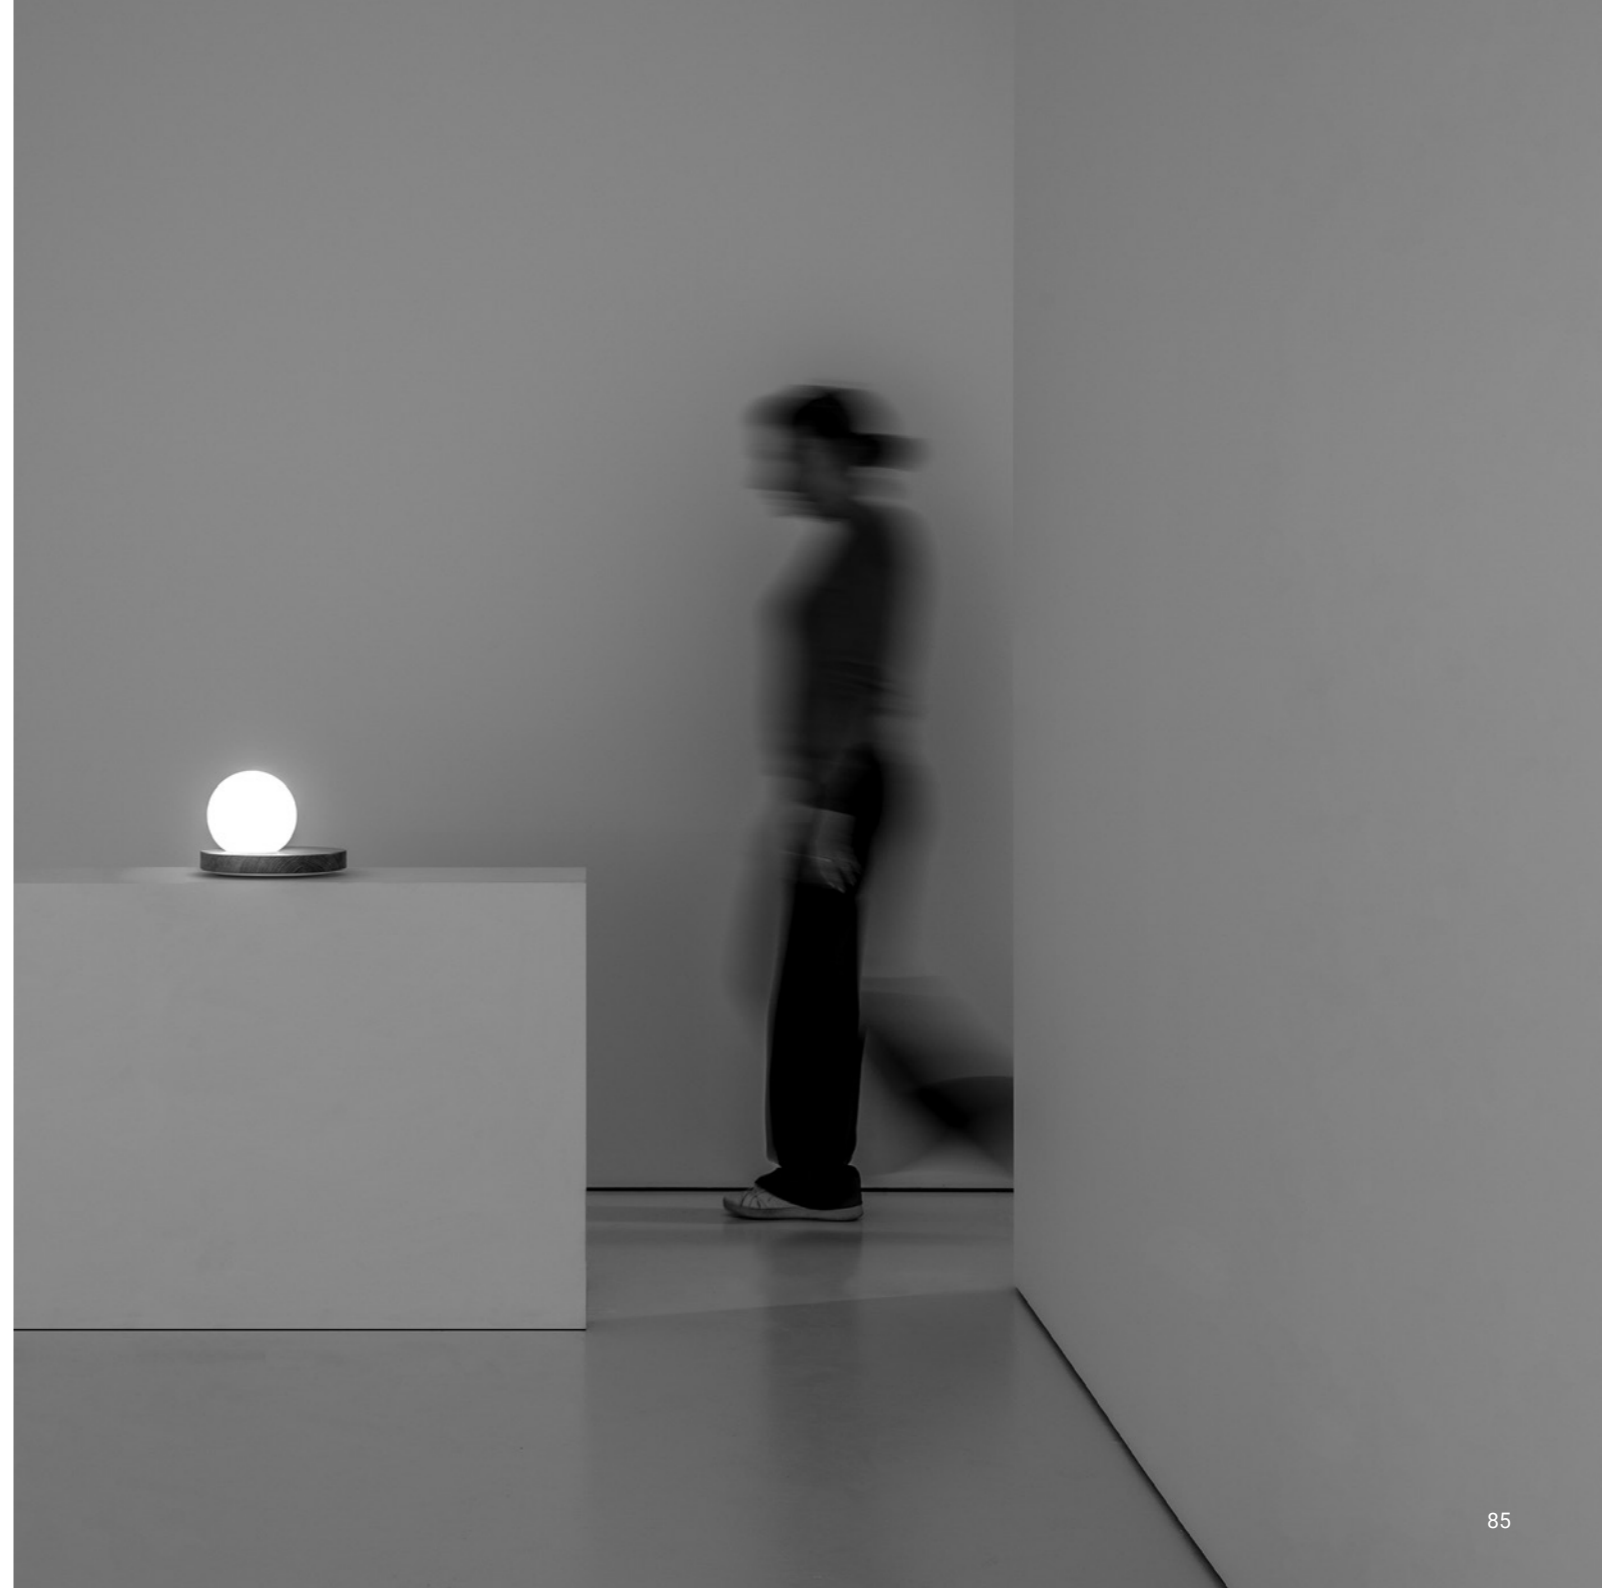

FLOOR



ABA 120

Omar Carraglia / 2007

Inspired by the shape of a traditional lampshade.
The bulb is not shielded but displayed, and it peeks out from the shade.
Table version available.


ABA 120

Omar Carraglia / 2007

Floor / Diffuse / Indoor

Material Metal - Methacrylate
Finish .03 Matt White

Note Floor luminaire. Dimmer on the cable. White cable.



ABA 120

Max 10W - E27
100-240V - 50/60Hz
Dimmer on board
Bulb not included
CE IP20 0.5m

Matt White - Dimmer on board

1A2770309.00.06

Optional accessories

Bulbs




LED - E27 - G125

Not included

220-240V - 7W - 360°
2700K - 806lm - CRI >80
Energy Efficiency E - Dimmable

1Y2080010

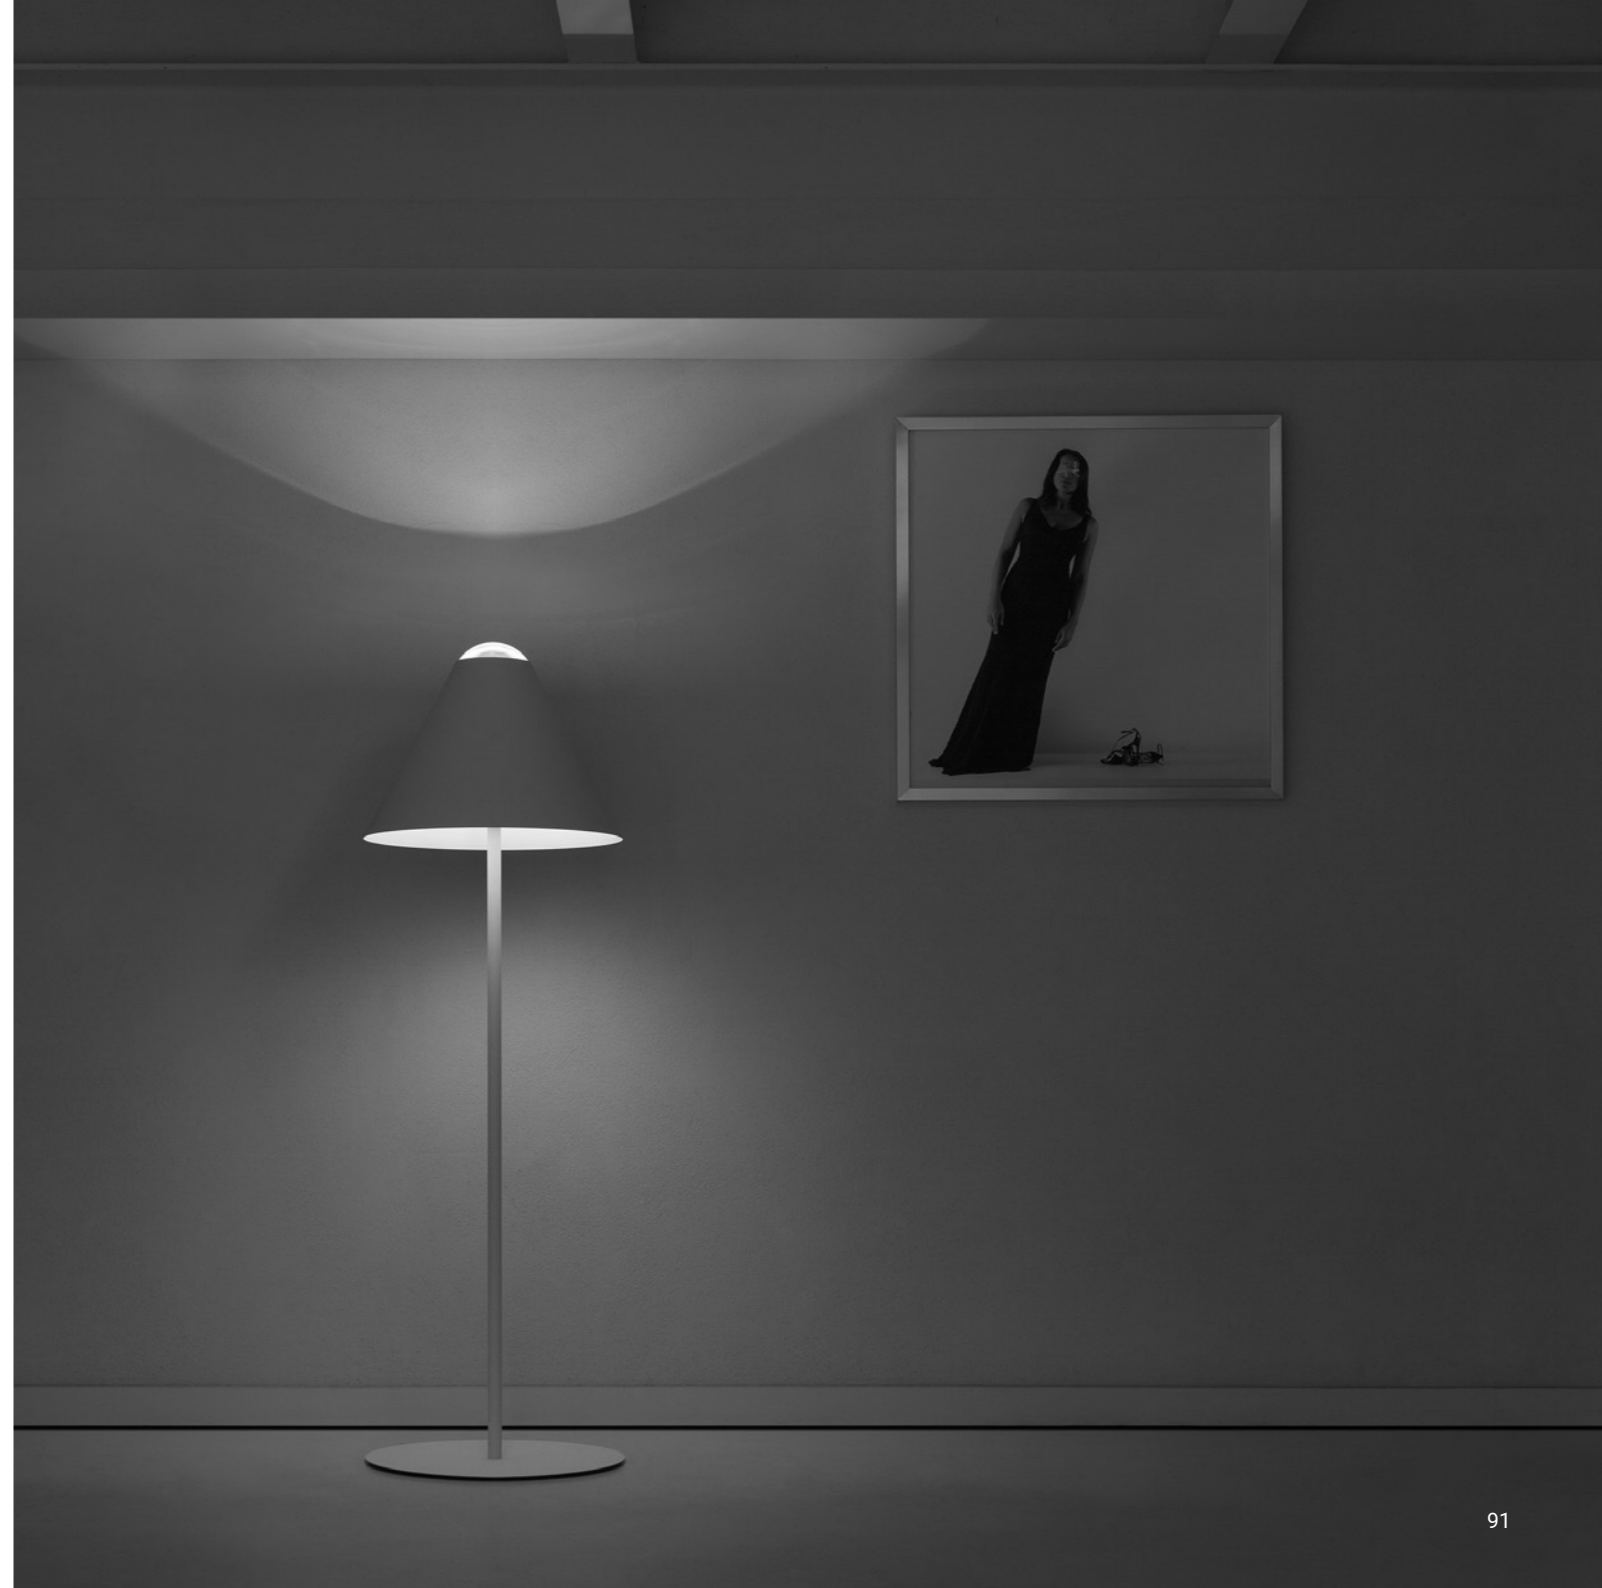



BANNER

Mauro Ferrari / 2004

A solution that is part fixed and part mobile.
The lamp is fixed to the wall, but is powered by a cable and normal electrical plug.
Banner is one of our many solutions for bringing light
where you need it, with the greatest freedom.


BANNER

Mauro Ferrari / 2004

Floor / Indirect / Indoor

Material Metal - Polycarbonate
Finish .03 Matt White

Note Floor lamp with wall fixing. Connection cable not included.



BANNER

90W

110-240V - 50/60Hz

2700K - 11083lm / 3000K - 11918lm

CRI >80

Driver integrated

DALI

CE IP20

Matt White - 2700K - DALI

1A1840300.27.01

Matt White - 3000K - DALI

1A1840300.30.01



BANNER

90W

110-240V - 50/60Hz

2700K - 11083lm / 3000K - 11918lm

CRI >80

Driver integrated

Dimmer on board

CE IP20

Matt White - 2700K - Dimmer on board

1A1840300.27.06

Matt White - 3000K - Dimmer on board

1A1840300.30.06



HASHI

Federico Delrosso / 2017



A floor lamp conceived to provide direct light in a simple and flexible manner. Its principle component is the pivot point between two "chopsticks" (Hashi) that serve as light sources which, positioned in different ways, create a strong, graphic effect in space. Particular care has been given to the proportions. The sticks always appear lightweight and balanced.

HASHI


Federico Delrosso / 2017

Floor / Direct / Indoor

Material Metal - Methacrylate

Finish .04 Matt Black .18 Matt Gold

Note Floor luminaire. Adjustable along the vertical axis. Dimmer on the cable.
Black cable.

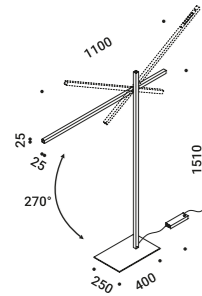

HASHI

15,5W

110-240V - 50/60Hz

2700K - 765lm / 3000K - 823lm

CRI >90

UGR <19

Driver integrated

Dimmer on board

CE IP20

Matt Black - 2700K - Dimmer on board

Matt Black - 3000K - Dimmer on board

Matt Gold - 2700K - Dimmer on board

Matt Gold - 3000K - Dimmer on board

1A2510409.27.06

1A2510409.30.06

1A2511809.27.06

1A2511809.30.06






A tribute to Alberto Giacometti and to his thin fellows...
A lamp for lighting pictures, powered by an ordinary electrical socket.
The lamp has an adjustable light and it can be oriented.
The lamp section is reduced to a minimum.

Floor-Suspension / Indirect / Indoor

Material Brass - Methacrylate
Finish **.03** Matt White **.04** Matt Black **.08** Brushed Brass

Note Floor luminaire with ceiling fixing. Adjustable along the vertical axis. Matt white rose. AISI 304 stainless steel suspension cable. Dimmer on the cable. Transparent cable. MASAI 2: version with power cable only and without driver.

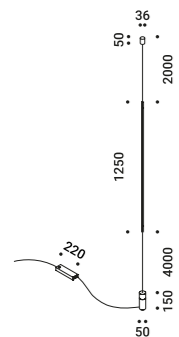


MASAI 1

Driver with plug version
 15,5W
 110-240V - 50/60Hz
 2700K - 600lm / 3000K - 619lm
 CRI >90
 Driver integrated
 Dimmer on board

CE IP20

Matt White - 3000K - Dimmer on board
 Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board
 Brushed Brass - 2700K - Dimmer on board
 Brushed Brass - 3000K - Dimmer on board
 Matt White - 2700K - Dimmer on board

1A2720309.30.06
 1A2720409.27.06
 1A2720409.30.06
 1A2720809.27.06
 1A2720809.30.06
 1A2720309.27.06

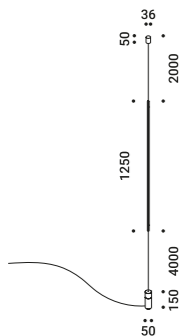

MASAI 2

Remote driver version
 13W
 24V DC - 50/60Hz
 2700K - 600lm / 3000K - 619lm
 CRI >90
 Driver not included


CE IP20

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K
 Brushed Brass - 2700K
 Brushed Brass - 3000K


1A2720300.27.20
 1A2720300.30.20
 1A2720400.27.20
 1A2720400.30.20
 1A2720800.27.20
 1A2720800.30.20

Compulsory accessories


Drivers



Driver				Not included
220-240V(100-127V)	24V/16W(15W)/IP20/DALI	MASAI 2	1Z0241180.24	



Driver				Not included
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH	MASAI 2	1Z0240870.24	



Driver				Not included
220-240V	24V/20W/IP20/TRIAC/IGBT	MASAI 2	1Z0240850.24	

Optional accessories

Suspension kits




Sloped ceiling suspension kit		Not included
	Nickel plated - 1 Piece	1A0510000.00.00



Recessed suspension kit for 12,5 mm plasterboard		Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.03.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.03.00



Ceiling suspension kit		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.03.00
Matt Black	For suspension cables - 1 Piece	1X0010400.03.00



Wall adapter plate		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00



304 Stainless steel suspension cable		Not included
	Lenght 10 m	1A1680000.00.00



MISTER

Omar Carraglia / 2013



Portable light.

A floor tool to grant a wonderful indirect light in the purest possible way.

MISTER


Omar Carraglia / 2013

Floor / Indirect / Indoor

Material Metal - Methacrylate

Finish .03 Matt White .04 Matt Black

Note Floor luminaire. Dimmer on the cable. White cable for the matt white finish, black cable for the matt black finish.

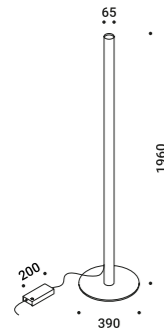

MISTER

33W

110-240V - 50/60Hz

2700K - 2771lm / 3000K - 2884lm

CRI >90

Driver integrated

Dimmer on board

CE IP20

Matt White - 2700K - Dimmer on board

1A2750309.27.06

Matt White - 3000K - Dimmer on board

1A2750309.30.06

Matt Black - 2700K - Dimmer on board

1A2750409.27.06

Matt Black - 3000K - Dimmer on board

1A2750409.30.06





MOON F

Daide Groppi / 2023

Moon was created from the dream of bringing the moon inside your own home.
The hand-made Japanese paper surface makes every lamp unique.
Suspension and floor versions also available.


MOON F

Davide Groppi / 2023

Floor / Diffuse / Indoor

Material Japanese paper - PE
Finish .00 Standard

Note Floor luminaire. PE and Japanese paper shade. Matt white base. Dimmer on the cable. White cable. For air and sea shipping: moisture barrier bag packaging compulsory for all models and wooden crate compulsory for MOON 120 F model.




MOON 80 F

Max 15W - E27
 100-240V - 50/60Hz
 Dimmer on board
 Bulb not included
 CE IP20

Standard - Dimmer on board

| 1A4880009.00.06 |



MOON 120 F

Max 2x25W - E27
 100-240V - 50/60Hz
 Dimmer on board
 Bulb not included
 CE IP20

Standard - Dimmer on board

| 1A4890009.00.06 |

Davide Groppi / 2023

MOON F

Optional accessories

Bulbs



LED - E27 - A60			Not included
	220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	MOON 80 F	1Y0330790



LED - E27 - A150			Not included
	220-240V - 20W - 200° 2700K - 2452lm - CRI >80 Energy Efficiency E - Dimmable	MOON 120 F	1Y2160020

Other accessories


Moisture barrier bag			Not included
	Packaging for air and sea shipping	MOON 80 F	4A2840010

Moisture barrier bag			Not included
	Packaging for air and sea shipping	MOON 120 F	49860020

Wooden crate			Not included
	Packaging for air and sea shipping	MOON 120 F	49860010

MOVIE

Omar Carraglia / 2005

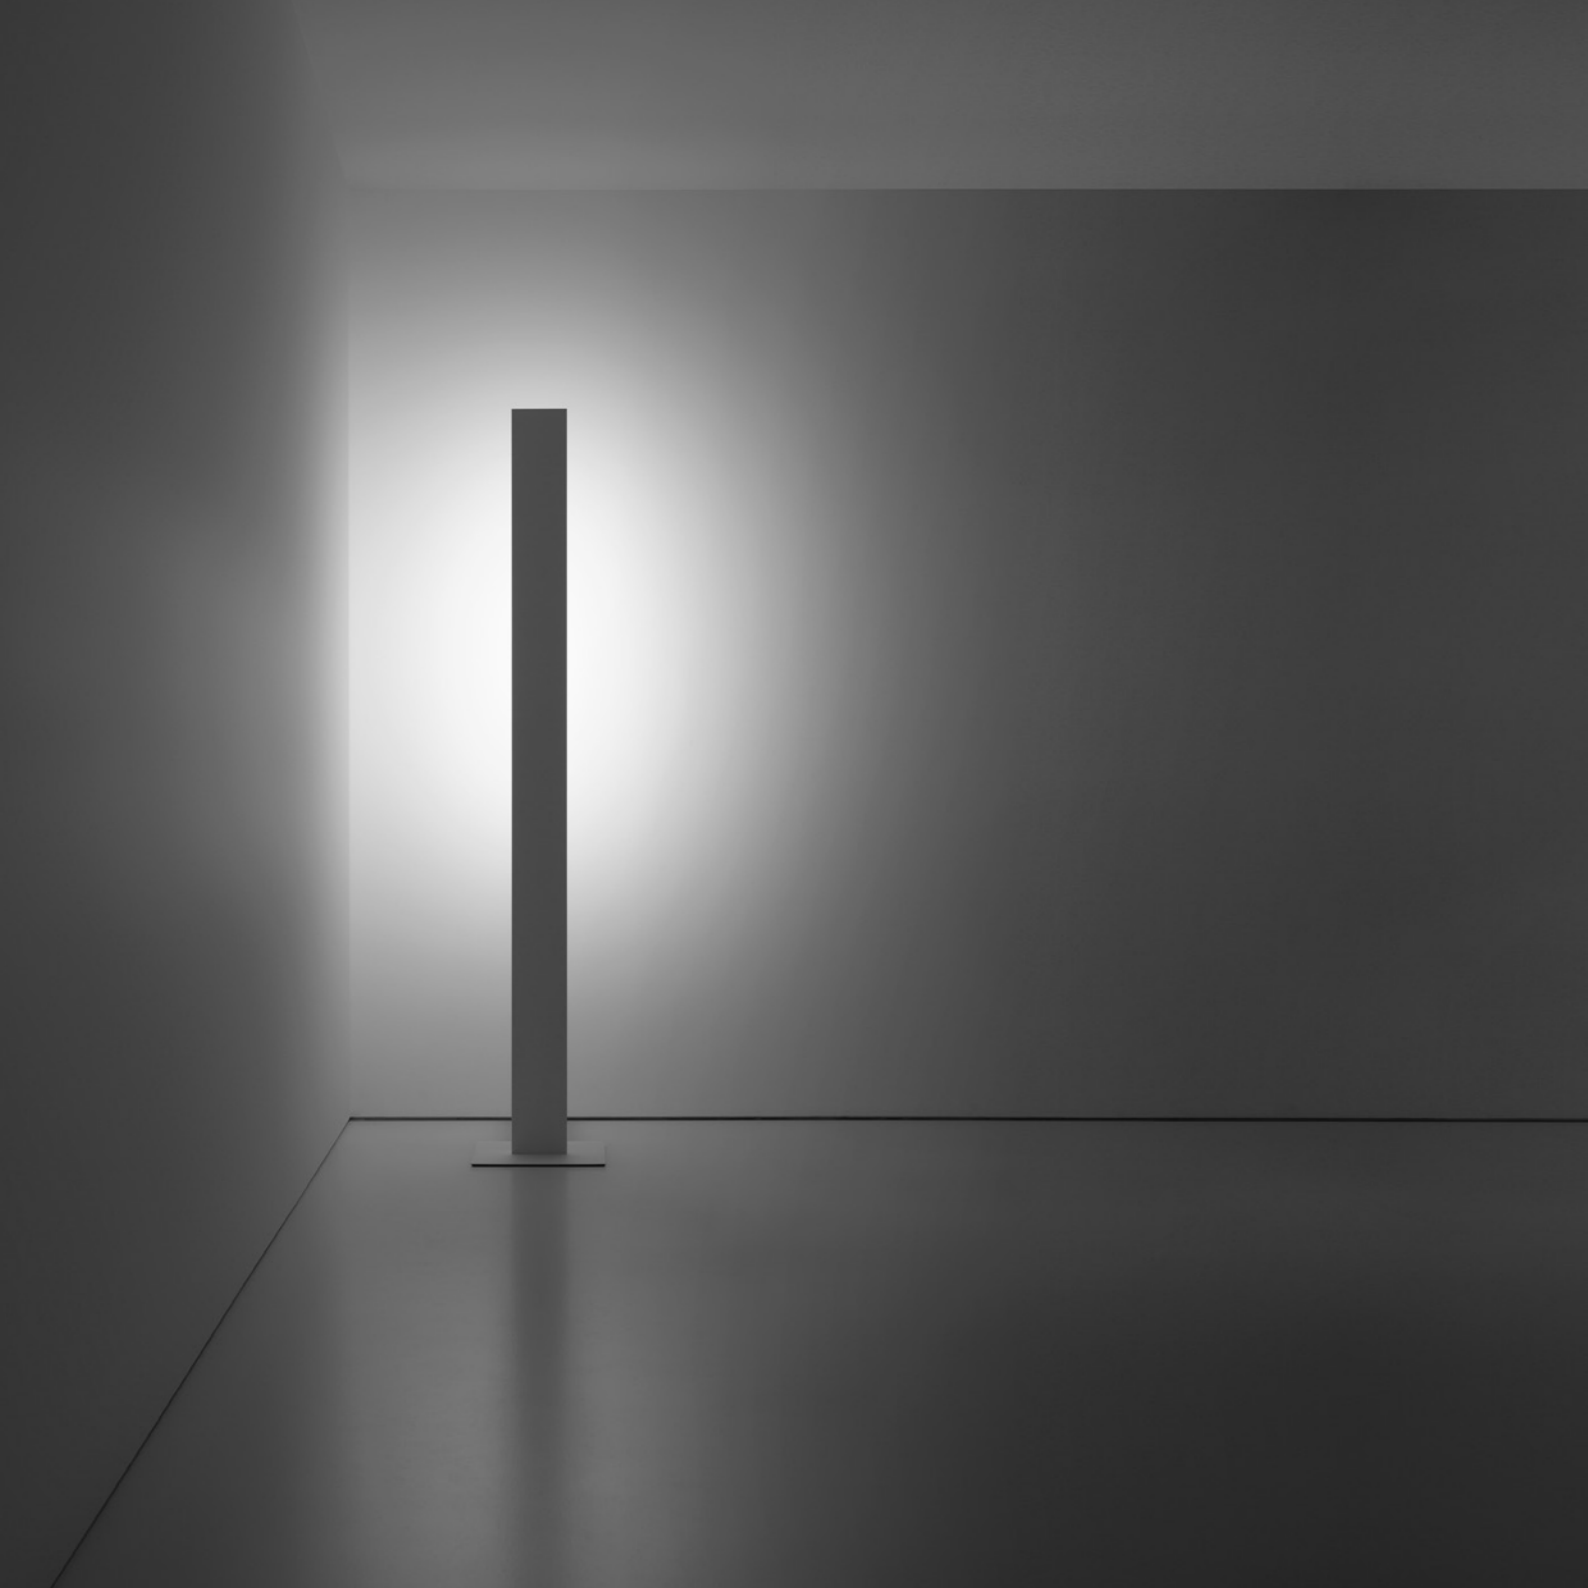

To "play" with the light.
A RGBW system lets you create all the light of the world.
To feel the light and to live it in all its spectrum.

MOVIE


Omar Carraglia / 2005

Floor / Indirect / Indoor

Material Metal - Polycarbonate

Finish .03 Matt White .13 Black Brushed Stainless Steel

Note Floor luminaire. RGBW wireless control. Black cable.

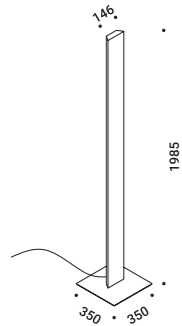

MOVIE

80W

100-240V - 50/60Hz

- 2832lm

CRI >90

Driver integrated

Dimmer on board

RGBW wireless control

CE IP20

Matt White - RGBW - Dimmer on board

1A2740309.98.06

Black Brushed Stainless Steel - RGBW - Dimmer on board

1A2741309.98.06



ORIGINE

Davide Groppi - Giorgio Rava / 2020



From the Latin "origo", start, birth, source.
It appears like a bud emerging from the ground and soaring upwards towards the sky,
a stem that becomes increasingly thinner.

Mysterious and enigmatic, it combines the fascination of the unknown
with the pleasure of a sophisticated and elegant ambient light.

Origine sculpts and enhances every environment with its indirect light,
which is intentionally non-invasive, graphic and fascinating.


Available in 3 different heights and in an outdoor version.

**AZ Award 2021 and People's Choice
Archiproducts Design Award 2020**

Floor / Indirect / Indoor

Material Glass fiber - Metal
Finish .04 Matt Black

Note Floor luminaire. Dimmer on the cable. Black cable.

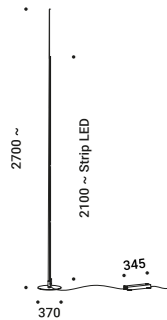


ORIGINE 290

25W
 24V DC
 2700K - 1926lm / 3000K - 2075lm
 CRI >80
 Driver included
 Dimmer on board
 CE IP20

Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A2300409.27.06
 1A2300409.30.06

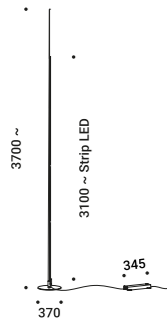


ORIGINE 390

30W
 24V DC
 2700K - 2843lm / 3000K - 3063lm
 CRI >80
 Driver included
 Dimmer on board
 CE IP20

Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A2310409.27.06
 1A2310409.30.06

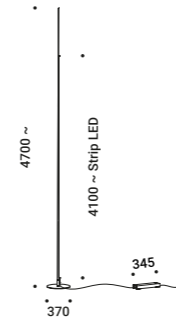

ORIGINE 490

35W
 24V DC
 2700K - 3760lm / 3000K - 4051lm
 CRI >80
 Driver included
 Dimmer on board
 CE IP20

Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A2320409.27.06
 1A2320409.30.06



PABLO

Davide Groppi / 2015



The light is elevated to a work of art and contemplation.
A luminous panel without a frame leans against the wall as if waiting to be hung.
The colour and brightness can be controlled from the remote control.


PABLO

Davide Groppi / 2015

Floor / Diffuse / Indoor

Material Metal - Methacrylate
Finish .00 Standard

Note Floor luminaire. Matt white diffuser. RGB wireless control. Transparent cable.

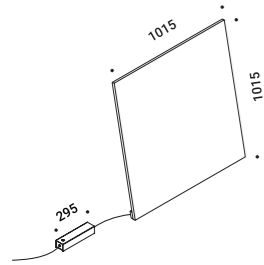


PABLO

66W
220-240V - 50/60Hz
Driver integrated
Dimmer on board
RGB wireless control
CE IP20

Standard - RGB - Dimmer on board

| 1A2730009.99.06 |



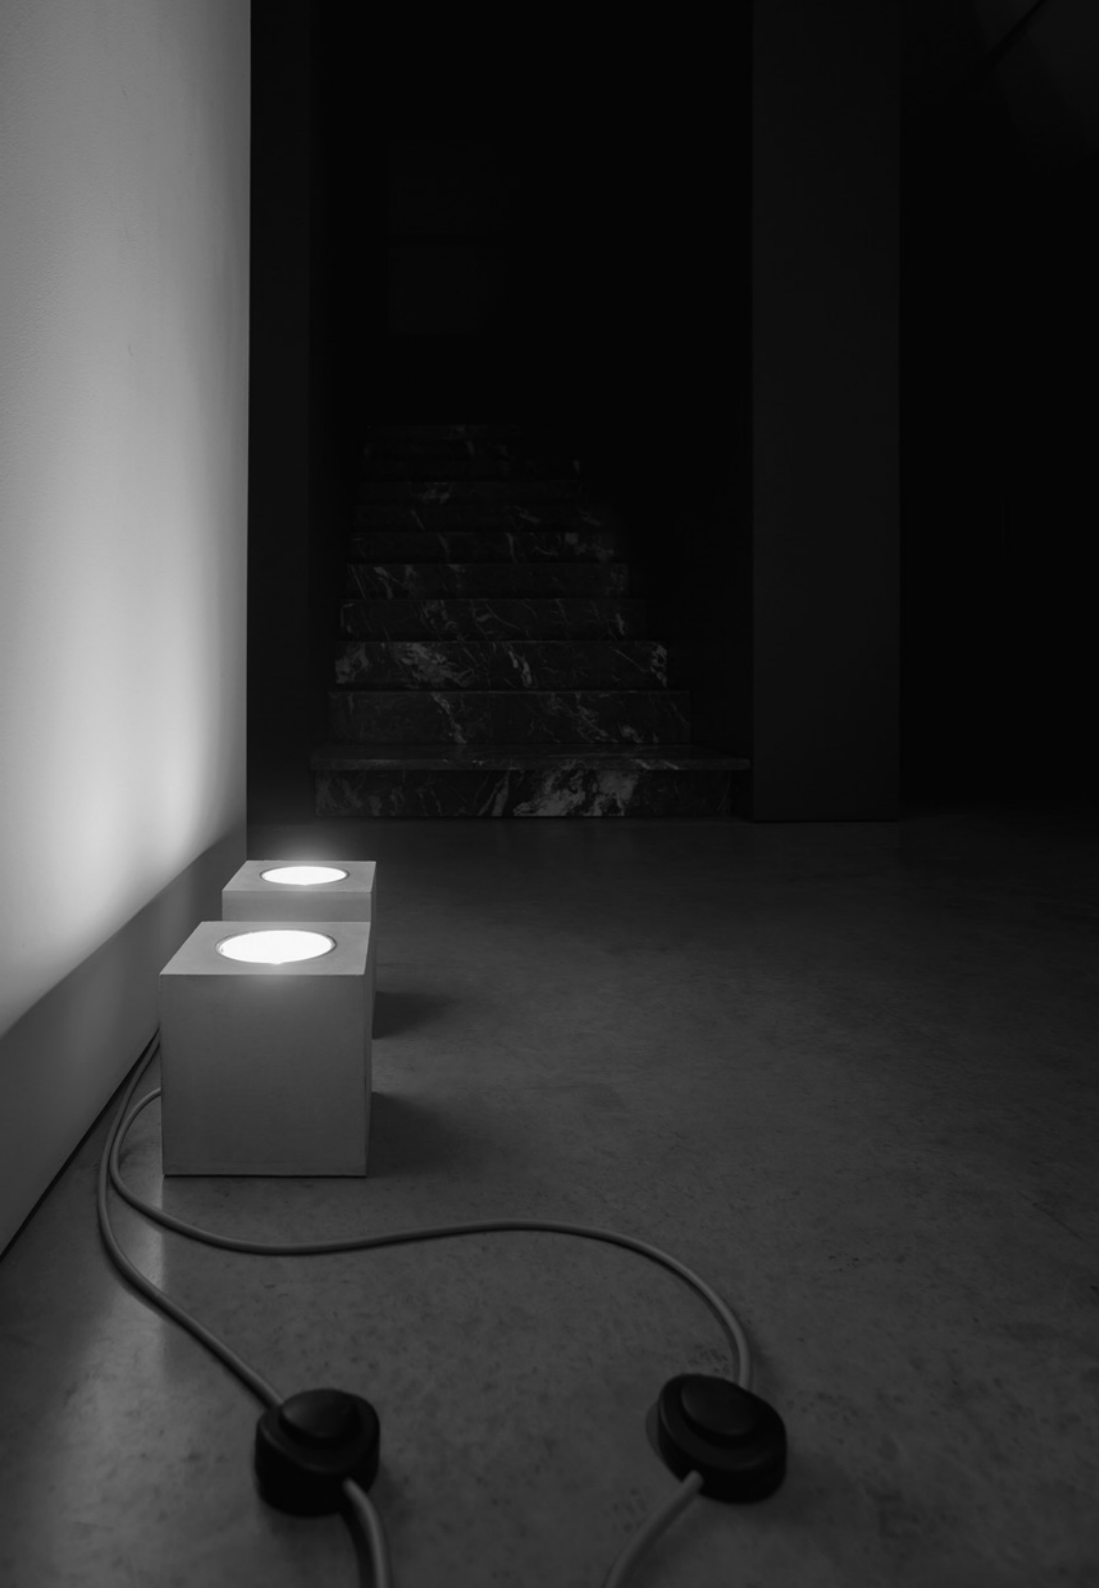

A piece of architecture to be used in space.
A concrete cube that allows you to understand volumes
and architecture in an unusual and unprecedented way.
Outdoor version also available.


Q

Alberto Zattin / 2000

Floor / Direct / Indoor

Material Cement - Metal
Finish .00 Standard

Note Floor luminaire. Concrete body. Black cable.



Q

Max 10W - GU10
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20

Standard - ON/OFF

| 1A2760009.00.00 |

Optional accessories

Bulbs




LED - GU10 - PAR16

Not included

220-240V - 4,9W - 120°
3000K - 550lm - CRI >80
Energy Efficiency E

1Y0330740

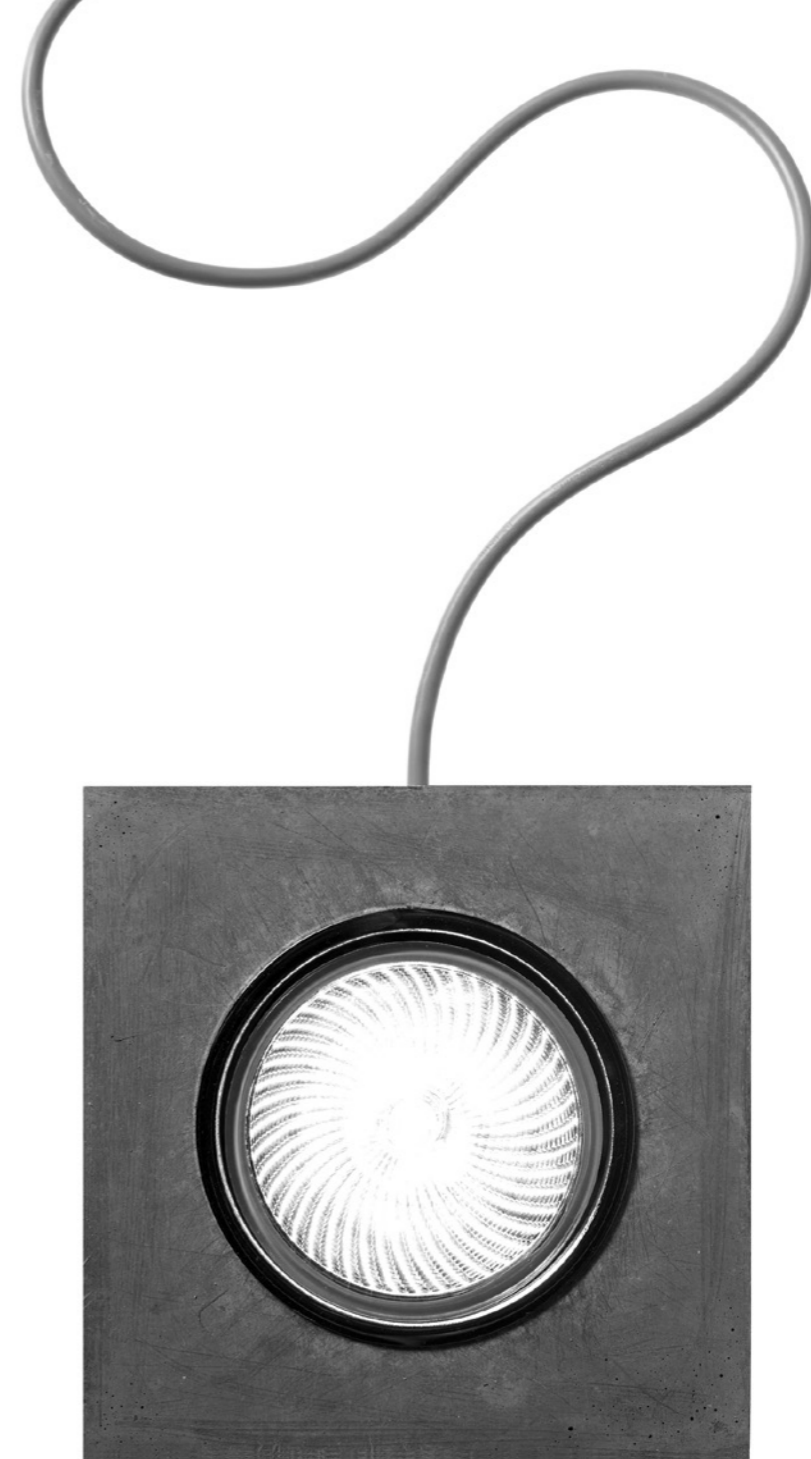



A special project, an authentic ready-made.
Obtained from a flexible fishing rod, it is a delicate and elegant sign,
which brings to mind the subtle branches of a willow tree
or bamboo canes floating on a light breeze.
Sampei is an unexpected gift, it is the magic of looking up, using light as a hook,
and being amazed by so much weightlessness.
The light is the fisherman's line, catching faces, gazes, people.
Available in 4 different heights and also in an outdoor version.


XXIII Compasso d'Oro ADI Award 2014
Elle Deco International Design Award 2011



Floor / Direct / Indoor

Material Glass fiber - Metal
Finish **.03** Matt White **.04** Matt Black

Note Floor luminaire. Adjustable in all directions. Dimmer on the cable. White cable for the matt white finish, black cable for the matt black finish.

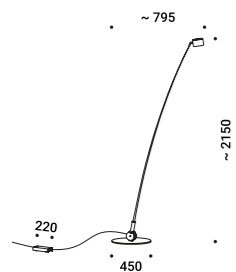


SAMPEI 230

Max 21W
 220-240V - 50/60Hz
 2700K - 1808lm / 3000K - 1890lm
 CRI >90
 Driver integrated
 Dimmer on board

CE IP20

Matt White - 2700K - Dimmer on board
 Matt White - 3000K - Dimmer on board
 Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A3730309.27.06
 1A3730309.30.06
 1A3730409.27.06
 1A3730409.30.06

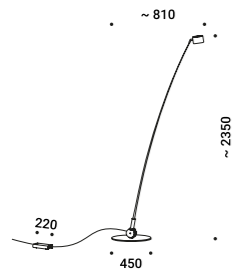


SAMPEI 260

Max 21W
 220-240V - 50/60Hz
 2700K - 1808lm / 3000K - 1890lm
 CRI >90
 Driver integrated
 Dimmer on board

CE IP20

Matt White - 2700K - Dimmer on board
 Matt White - 3000K - Dimmer on board
 Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A3740309.27.06
 1A3740309.30.06
 1A3740409.27.06
 1A3740409.30.06

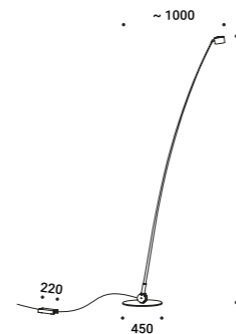


SAMPEI 290

Max 21W
 220-240V - 50/60Hz
 2700K - 1808lm / 3000K - 1890lm
 CRI >90
 Driver integrated
 Dimmer on board

CE IP20

Matt White - 2700K - Dimmer on board
 Matt White - 3000K - Dimmer on board
 Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A3750309.27.06
 1A3750309.30.06
 1A3750409.27.06
 1A3750409.30.06

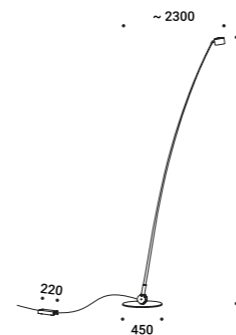

SAMPEI 440

Max 21W
 220-240V - 50/60Hz
 2700K - 1832lm / 3000K - 1915lm
 CRI >90
 Driver integrated
 Dimmer on board

CE IP20

Matt White - 2700K - Dimmer on board
 Matt White - 3000K - Dimmer on board
 Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board


1A3760309.27.06
 1A3760309.30.06
 1A3760409.27.06
 1A3760409.30.06

Optional accessories


Other accessories




Accessory holder + Soft filter + Honeycomb louvre		Not included
Matt Black		1X0070400.04.00




Accessory holder + Elliptical filter		Not included
Matt Black		1X0070400.05.00



Blue filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00



Red filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00



Yellow filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00



SHOJI

Davide Groppi - Paola Lenti / 2013



A nylon lampshade, strictly hand-stitched and hand-made.
Outdoor version also available.

SHOJI


Davide Groppi - Paola Lenti / 2013

Floor / Diffuse / Indoor

Material Metal - PBT - Polycarbonate

Finish .00 Standard

Note Floor luminaire. Hand-stitched shade. Matt black stems. Dimmer on the cable. Black cable.



SHOJI

Max 18W - E27

100-240V - 50/60Hz

Dimmer on board

Bulb not included

CE IP20

Standard - Dimmer on board

| 1A2780009.00.06 |

Optional accessories

Bulbs



LED - E27

220-240V - 13W - 200°
2700K - 1521lm - CRI >80
Energy Efficiency E

1Y0330650

Not included



SUSPENSION



CATHODE


Omar Carraglia / 2015

A scientific looking bulb made from mouth blown glass.
The shape brings to mind a light bulb that was never born.
Think steampunk: situations in which instruments were inspired by
the rudiments of electricity. The classic light bulb that has no future
becomes a wonderful device made of luminous diodes.
What would the past have looked like if the future had arrived first?
Luminaire available also in ENDLESS version.

Suspension / Diffuse / Indoor

Material Blown glass - Metal
Finish **.03** Matt White **.08** Brushed Brass

Note Suspension luminaire. Blown glass diffuser. Matt white rose and white cable for the matt white finish. Matt black rose and black cable for the brushed brass finish. Single rose for more than one lamp on request. CATHODE 2: plasterboard version with magnetic fixing flat rose. CATHODE ENDLESS: luminaire dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). It can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.



CATHODE 1

Ceiling driver version
 5,6W
 100-240V - 50/60Hz
 2700K - 264lm / 3000K - 284lm
 CRI >90
 Driver integrated
 ON/OFF

CE IP20

Matt White - 2700K - ON/OFF
 Matt White - 3000K - ON/OFF
 Brushed Brass - 2700K - ON/OFF
 Brushed Brass - 3000K - ON/OFF

1A2980300.27.00
 1A2980300.30.00
 1A2980800.27.00
 1A2980800.30.00



CATHODE 1

Ceiling driver version
 6W
 110-240V - 50/60Hz
 2700K - 264lm / 3000K - 284lm
 CRI >90
 Driver integrated
 DALI

CE IP20

Matt White - 2700K - DALI
 Matt White - 3000K - DALI
 Brushed Brass - 2700K - DALI
 Brushed Brass - 3000K - DALI

1A2980300.27.01
 1A2980300.30.01
 1A2980800.27.01
 1A2980800.30.01



CATHODE 1

Ceiling driver version
 6W
 110-240V - 50/60Hz
 2700K - 264lm / 3000K - 284lm
 CRI >90
 Driver integrated
 PUSH

CE IP20

Matt White - 2700K - PUSH
 Matt White - 3000K - PUSH
 Brushed Brass - 2700K - PUSH
 Brushed Brass - 3000K - PUSH

1A2980300.27.04
 1A2980300.30.04
 1A2980800.27.04
 1A2980800.30.04



CATHODE 1

Ceiling driver version
 6W
 110-240V - 50/60Hz
 2700K - 264lm / 3000K - 284lm
 CRI >90
 Driver integrated
 1-10V

CE IP20

Matt White - 2700K - 1-10V
 Matt White - 3000K - 1-10V
 Brushed Brass - 2700K - 1-10V
 Brushed Brass - 3000K - 1-10V

1A2980300.27.03
 1A2980300.30.03
 1A2980800.27.03
 1A2980800.30.03




CATHODE 1

Ceiling driver version
 6W
 110-240V - 50/60Hz
 2700K - 264lm / 3000K - 284lm
 CRI >90
 Driver integrated
 TRIAC/IGBT

CE IP20

Matt White - 2700K - TRIAC/IGBT
 Matt White - 3000K - TRIAC/IGBT
 Brushed Brass - 2700K - TRIAC/IGBT
 Brushed Brass - 3000K - TRIAC/IGBT

1A2980300.27.02
 1A2980300.30.02
 1A2980800.27.02
 1A2980800.30.02




CATHODE 2

Remote driver version
 4W
 Max 350mA DC
 2700K - 264lm / 3000K - 284lm
 CRI >90
 Driver not included
 CE IP20

Matt White - 2700K
 Matt White - 3000K
 Brushed Brass - 2700K
 Brushed Brass - 3000K

1A2990300.27.20
 1A2990300.30.20
 1A2990800.27.20
 1A2990800.30.20

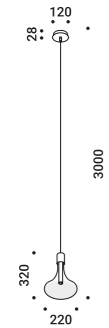

CATHODE ENDLESS




ENDLESS version only
 5,5W - 0,14A
 48V DC
 2700K - 264lm / 3000K - 284lm
 CRI >90
 Driver not included
 See page ENDLESS
 CE IP20 TE

Matt White - 2700K
 Matt White - 3000K
 Brushed Brass - 2700K
 Brushed Brass - 3000K

1A2980300.27.40
 1A2980300.30.40
 1A2980800.27.40
 1A2980800.30.40

Compulsory accessories

Drivers





Driver				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	CATHODE 2	1Z0241180.350	

Driver				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	CATHODE 2	1Z0240870.350	

Driver				Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	CATHODE 2	1Z0240850.350	

Optional accessories

Suspension kits



Decentralization kit				Not included
		CATHODE 1	1A0360000.00.00	

Kit ceiling rose and decentralizer				Not included
Matt White	White cable 3 m included	CATHODE 1	1A0770300.00.00	
Matt Black	Black cable 3 m included	CATHODE 1	1A0770400.00.00	



FOSBURY

Davide Groppi / 2014



A lamp that interprets the classic theme of decentralization.
An acrobatic and apparently precarious presence,
bringing light where you prefer it, starting from a simple wall socket.
AZ Award 2016


FOSBURY

Davide Groppi / 2014

Suspension / Direct-Indirect / Indoor

Material Metal
Finish .04 Matt Black

Note Suspension luminaire with floor support. Matt white rose. AISI 304 stainless steel suspension cable. Dual emission. Indirect blue light. Transparent cable.

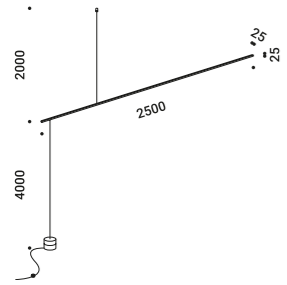

FOSBURY

23W

220-240V - 50/60Hz

2700K - Down 765lm - Up 59lm /

3000K - Down 823lm - Up 59lm

CRI >90

UGR <19

Driver integrated

ON/OFF

CE IP20

Matt Black - 2700K - ON/OFF

1A2590409.27.00

Matt Black - 3000K - ON/OFF

1A2590409.30.00

Optional accessories

Suspension kits



Sloped ceiling suspension kit

Not included

Nickel plated - 1 Piece

1A0510000.00.00



LED IS MORE

Daide Groppi / 2011



A tribute to Mies van der Rohe and his Less is More.
The project represents a light icon in a LED key,
with a peculiar attention to energy savings and the quality of light.

LED IS MORE

Davide Groppi / 2011

Suspension / Diffuse / Indoor

Material Metal - Methacrylate
Finish .03 Matt White

Note Suspension luminaire. Sanded methacrylate diffuser. Matt white rose. White cable. Single rose for more than one lamp on request.



LED IS MORE


5,6W
 100-240V - 50/60Hz
 3000K - 354lm
 CRI >90
 Driver integrated
 ON/OFF
 CE IP20

Matt White - 3000K - ON/OFF

1A2790300.30.00

Optional accessories


Suspension kits



Decentralization kit

Not included

1A0360000.00.00



Kit ceiling rose and decentralizer

Not included

Matt White White cable 3 m included

1A0770300.00.00

Matt Black Black cable 3 m included

1A0770400.00.00





LOUIS XIV


Daide Groppi / 2023

Louis XIV is the freakiest letter of our light alphabet.
It's a disobedient design that translates a certain rebellion
to common lamp models into light.
I wanted to investigate the idea of the chandelier: in line with our poetics,
Louis XIV is the only possible solution for lightness and irony.
Dimmable suspension lamp with double emission.

Suspension / Direct-Indirect / Indoor

Material Glass - Metal
Finish .19 Polished Gold

Note Suspension luminaire. Eighty crystal drops and a bird. Natural brass branches. Structure with polished gold finish. Matt white rose. Dual emission and on/off. White cable. LOUIS XIV 2: version with power cable only and without rose.

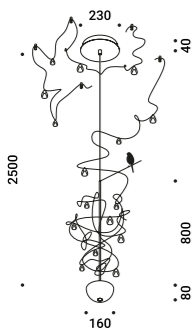


LOUIS XIV 1

Ceiling driver version
 16,5W
 110-240V - 50/60Hz
 2700K - Up 890lm - Down 210lm /
 3000K - Up 936lm - Down 235lm
 CRI >90
 UGR <19
 Driver integrated
 TRIAC/IGBT
CE IP20

Polished Gold - 2700K - TRIAC/IGBT
 Polished Gold - 3000K - TRIAC/IGBT

1A4361900.27.02
 1A4361900.30.02

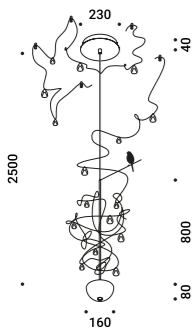


LOUIS XIV 1

Ceiling driver version
 16,5W
 110-240V - 50/60Hz
 2700K - Up 890lm - Down 210lm /
 3000K - Up 936lm - Down 235lm
 CRI >90
 UGR <19
 Driver integrated
 DALI - PUSH - 1-10V
CE IP20

Polished Gold - 2700K - DALI - PUSH - 1-10V
 Polished Gold - 3000K - DALI - PUSH - 1-10V

1A4361900.27.07
 1A4361900.30.07

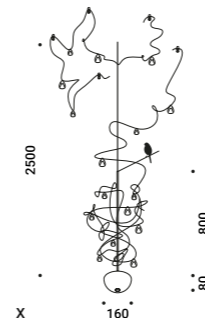

LOUIS XIV 2


Remote driver version
 15W
 Max 250mA DC
 2700K - Up 890lm - Down 210lm /
 3000K - Up 936lm - Down 235lm
 CRI >90
 UGR <19
 Driver not included
 2 Drivers required
CE IP20

Polished Gold - 2700K
 Polished Gold - 3000K


1A4361900.27.20
 1A4361900.30.20

Compulsory accessories


Drivers



Driver			Not included
220-240V(110-127V)	250mA/13,5W(13,5W)/IP20/DALI - PUSH LOUIS XIV 2 - 1-10V	1Z0241270.250	




Driver			Not included
220-240V	250mA/12,5W/IP20/TRIAC/IGBT LOUIS XIV 2	1Z0241280	



Driver			Not included
220-240V	250mA/4,2W/IP20/TRIAC/IGBT LOUIS XIV 2	1Z2320010	

Optional accessories

Suspension kits



Recessed suspension kit for 12,5 mm plasterboard			Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	LOUIS XIV 2 1X0000300.05.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	LOUIS XIV 2 1X0000400.05.00	






Light and transparency are the true stars of this project.
We have always liked to think heretically, evoking mystery, magic and seduction.
Magia is the new modular suspension lighting system that can be adapted to suit the
different heights of the rooms and can generate direct and indirect light
with the 360° adjustable module.

In this case, the lens is not used to focus, but to modify the vision
and perception of the object.


The effect of the convex lens conceals the part of the light beam
and produces the lightest effect of suspension and inconsistency.
Luminaire designed also to be powered by ENDLESS conductive tape.

Archiproducts Design Award 2023


Single installation with ceiling driver

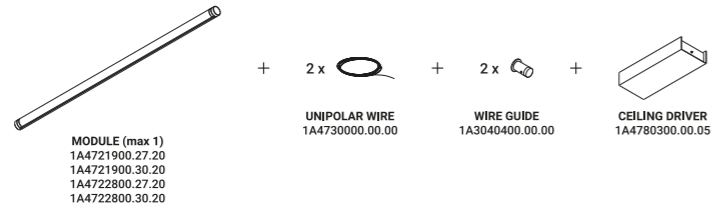


Multiple installation with ceiling driver

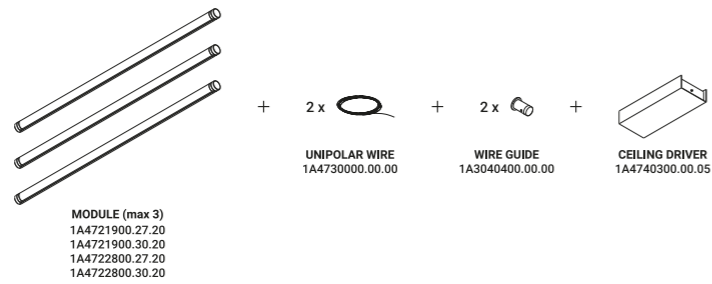

Single installation with recessed or ceiling suspension kit

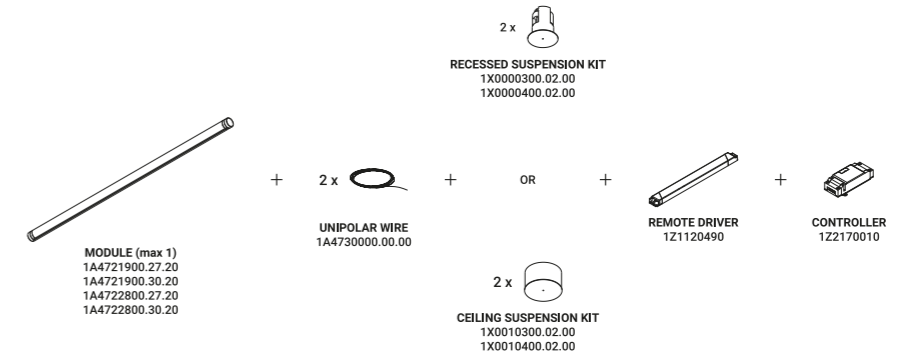


Multiple installation with recessed or ceiling suspension kit

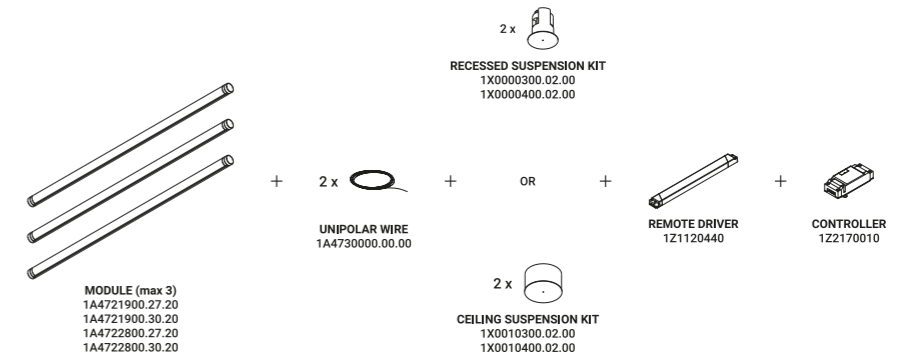

Suspension / Direct-Indirect / Indoor

Material	Metal - PMMA
Finish	.19 Polished Gold .28 Polished Black Chrome

Note Modular suspension luminaire. Adjustable along the horizontal axis. Transparent bar with refractive effect. LED module profile with matt black finish. Details with polished gold or black chrome finish. Matt white rose. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

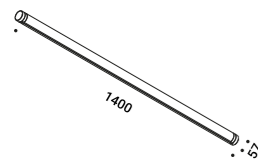

MAGIA - MODULE

19W
24V DC
2700K - 1272lm / 3000K - 1312lm
CRI >90
Driver not included



Polished Gold - 2700K
Polished Gold - 3000K
Polished Black Chrome - 2700K
Polished Black Chrome - 3000K

1A4721900.27.20
1A4721900.30.20
1A4722800.27.20
1A4722800.30.20

Compulsory accessories

Installation kits



Wire guide			Not included
Matt Black	1 Piece		1A3040400.00.00



Unipolar wire - 6 m			Not included
	1 Piece - Max 60V DC	Max 3 modules	1A4730000.00.00

Suspension kits




Recessed suspension kit for 12,5 mm plasterboard			Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000300.02.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000400.02.00




Ceiling suspension kit			Not included
Matt White	For electrical cables - 1 Piece		1X0010300.02.00
Matt Black	For electrical cables - 1 Piece		1X0010400.02.00

Compulsory accessories


Drivers




Ceiling driver			Not included
Matt White	Input 220-240V - 50/60Hz Output 24V - 21W - IP20 DALI - PUSH - 1-10V - TRIAC	Max 1 module	1A4780300.00.05




Ceiling driver			Not included
Matt White	Input 120-240V - 50/60Hz Output 24V - 60W - IP20 DALI - PUSH - 1-10V - TRIAC	Max 3 modules	1A4740300.00.05




Driver			Not included
100-240V	24V/50W/IP20/ON/OFF	Max 1 module	1Z1120490



Driver			Not included
100-240V	24V/80W/IP20/ON/OFF	Max 3 modules	1Z1120440




Driver			Not included
100-240V	24V/150W/IP67/1-10V	Max 6 modules	1Z1120500



Controller			Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20		1Z2170010


Optional accessories

Suspension kits




Wall adapter plate			Not included
Matt White	For mounting on brick masonry walls		1X0050300.01.00




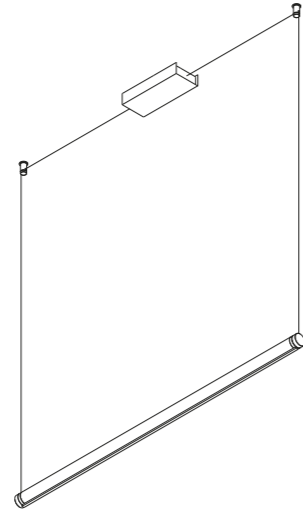


Example of single installation with ceiling driver

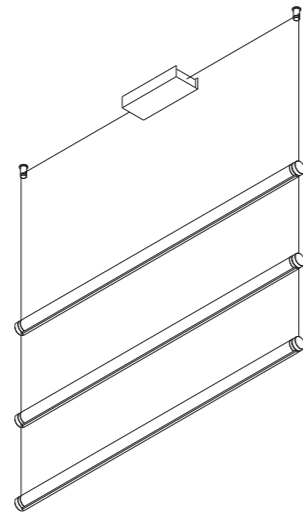


Example of multiple installation with ceiling driver

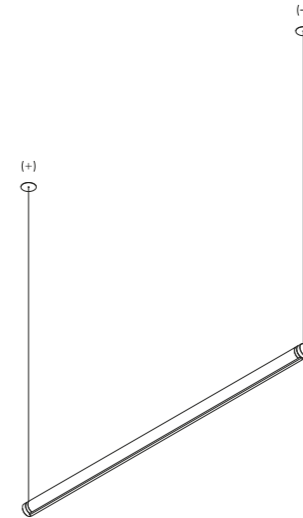


Example of single installation with recessed suspension kit

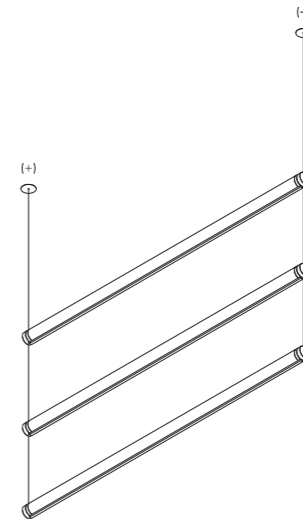


Example of multiple installation with recessed suspension kit

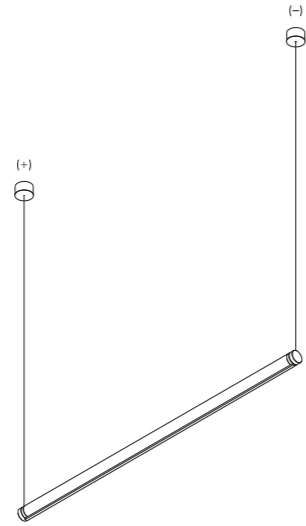

Example of single installation with ceiling suspension kit

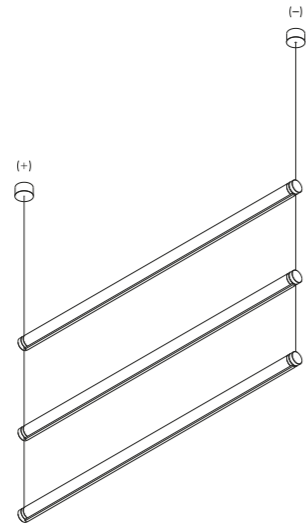

Example of multiple installation with ceiling suspension kit

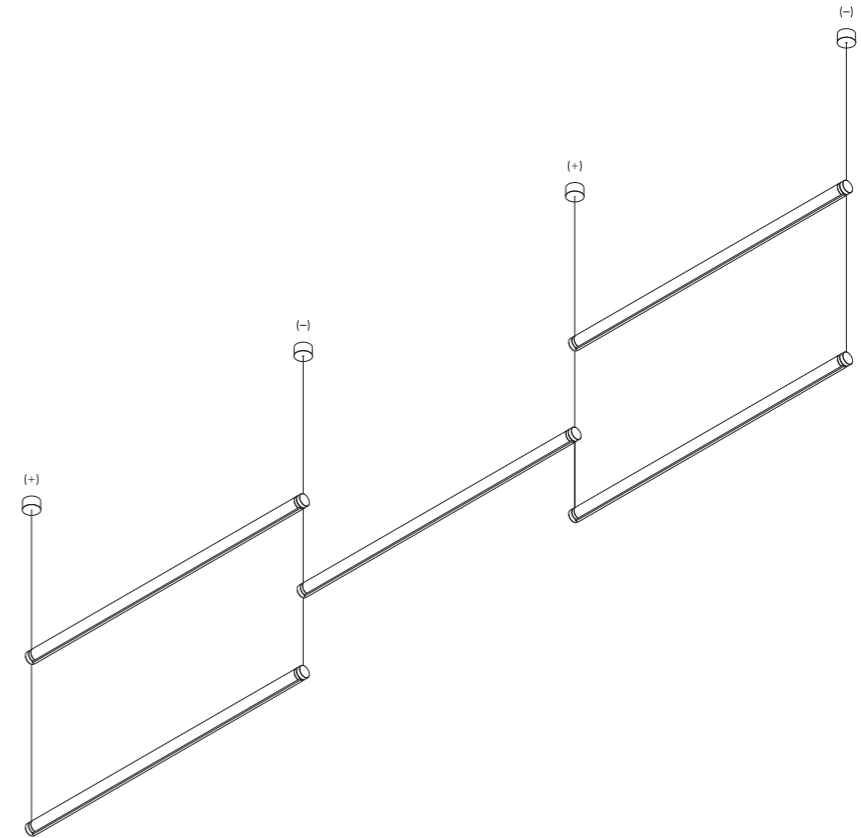

Example of multiple installation | Max 3 modules for cable

MISS

Omar Carraglia / 2006




So slim and essential...
The fundamental concept of this project is minimalism.
A small tube that lights the table with wonder.
A real dual project: sign and light.
Luminaire available also in ENDLESS version.

Suspension / Direct / Indoor

Material Metal
Finish **.03** Matt White **.04** Matt Black **.08** Brushed Brass **.26** Total Black


Note Suspension luminaire. Matt white rose and white cable for the matt white and matt black finish. Matt black rose and black cable for the total black and brushed brass finish. Single rose for more than one lamp on request. MISS 2: plasterboard version with magnetic fixing flat rose. MISS ENDLESS: luminaire dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). It can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.



MISS 1
 Ceiling driver version
 5,6W
 100-240V - 50/60Hz
 2700K - 290lm / 3000K - 310lm
 CRI >90
 Driver integrated
 ON/OFF
CE IP20

Matt White - 2700K - ON/OFF
 Matt White - 3000K - ON/OFF
 Matt Black - 2700K - ON/OFF
 Matt Black - 3000K - ON/OFF
 Brushed Brass - 2700K - ON/OFF
 Brushed Brass - 3000K - ON/OFF
 Total Black - 2700K - ON/OFF
 Total Black - 3000K - ON/OFF

1A2960300.27.00
 1A2960300.30.00
 1A2960400.27.00
 1A2960400.30.00
 1A2960800.27.00
 1A2960800.30.00
 1A2962600.27.00
 1A2962600.30.00



MISS 1
 Ceiling driver version
 6W
 110-240V - 50/60Hz
 2700K - 290lm / 3000K - 310lm
 CRI >90
 Driver integrated
 DALI
CE IP20

Matt White - 2700K - DALI
 Matt White - 3000K - DALI
 Matt Black - 2700K - DALI
 Matt Black - 3000K - DALI
 Brushed Brass - 2700K - DALI
 Brushed Brass - 3000K - DALI
 Total Black - 2700K - DALI
 Total Black - 3000K - DALI

1A2960300.27.01
 1A2960300.30.01
 1A2960400.27.01
 1A2960400.30.01
 1A2960800.27.01
 1A2960800.30.01
 1A2962600.27.01
 1A2962600.30.01



MISS 1
 Ceiling driver version
 6W
 110-240V - 50/60Hz
 2700K - 290lm / 3000K - 310lm
 CRI >90
 Driver integrated
 PUSH
CE IP20

Matt White - 2700K - PUSH
 Matt White - 3000K - PUSH
 Matt Black - 2700K - PUSH
 Matt Black - 3000K - PUSH
 Brushed Brass - 2700K - PUSH
 Brushed Brass - 3000K - PUSH
 Total Black - 2700K - PUSH
 Total Black - 3000K - PUSH

1A2960300.27.04
 1A2960300.30.04
 1A2960400.27.04
 1A2960400.30.04
 1A2960800.27.04
 1A2960800.30.04
 1A2962600.27.04
 1A2962600.30.04



MISS 1
 Ceiling driver version
 6W
 110-240V - 50/60Hz
 2700K - 290lm / 3000K - 310lm
 CRI >90
 Driver integrated
 1-10V
CE IP20

Matt White - 2700K - 1-10V
 Matt White - 3000K - 1-10V
 Matt Black - 2700K - 1-10V
 Matt Black - 3000K - 1-10V
 Brushed Brass - 2700K - 1-10V
 Brushed Brass - 3000K - 1-10V
 Total Black - 2700K - 1-10V
 Total Black - 3000K - 1-10V

1A2960300.27.03
 1A2960300.30.03
 1A2960400.27.03
 1A2960400.30.03
 1A2960800.27.03
 1A2960800.30.03
 1A2962600.27.03
 1A2962600.30.03



MISS 1
 Ceiling driver version
 6W
 110-240V - 50/60Hz
 2700K - 290lm / 3000K - 310lm
 CRI >90
 Driver integrated
 TRIAC/IGBT
CE IP20

Matt White - 2700K - TRIAC/IGBT
 Matt White - 3000K - TRIAC/IGBT
 Matt Black - 2700K - TRIAC/IGBT
 Matt Black - 3000K - TRIAC/IGBT
 Brushed Brass - 2700K - TRIAC/IGBT
 Brushed Brass - 3000K - TRIAC/IGBT
 Total Black - 2700K - TRIAC/IGBT
 Total Black - 3000K - TRIAC/IGBT

1A2960300.27.02
 1A2960300.30.02
 1A2960400.27.02
 1A2960400.30.02
 1A2960800.27.02
 1A2960800.30.02
 1A2962600.27.02
 1A2962600.30.02




MISS 2

Remote driver version
4W
Max 350mA DC
2700K - 290lm / 3000K - 310lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K
Brushed Brass - 2700K
Brushed Brass - 3000K
Total Black - 2700K
Total Black - 3000K

1A2970300.27.20
1A2970300.30.20
1A2970400.27.20
1A2970400.30.20
1A2970800.27.20
1A2970800.30.20
1A2972600.27.20
1A2972600.30.20



MISS ENDLESS




Endless version only
5,5W - 0,14A
48V DC - 50/60Hz
2700K - 290lm / 3000K - 310lm
CRI >90
Driver not included
See page ENDLESS
CE IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K
Brushed Brass - 2700K
Brushed Brass - 3000K
Total Black - 2700K
Total Black - 3000K

1A2960300.27.40
1A2960300.30.40
1A2960400.27.40
1A2960400.30.40
1A2960800.27.40
1A2960800.30.40
1A2962600.27.40
1A2962600.30.40

Compulsory accessories

Drivers





Driver				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	MISS 2	1Z0241180.350	

Driver				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	MISS 2	1Z0240870.350	

Driver				Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	MISS 2	1Z0240850.350	

Optional accessories

Suspension kits



Decentralization kit				Not included
		MISS 1	1A0360000.00.00	

Kit ceiling rose and decentralizer				Not included
Matt White	White cable 3 m included	MISS 1	1A0770300.00.00	
Matt Black	Black cable 3 m included	MISS 1	1A0770400.00.00	

MOON

Daide Groppi / 2005




Moon was created from the dream of bringing the moon inside your own home.
The hand-made Japanese paper surface makes every lamp unique.
Table and floor versions available.

Suspension / Diffuse / Indoor

Material Japanese paper - PE
Finish .00 Standard


Note Suspension luminaire. PE and Japanese paper shade. Matt white rose. AISI 304 stainless steel suspension cable. White cable. Compulsory moisture barrier bag packaging for air and sea shipping. MOON 60 DE: version with dual emission and on/off. Transparent cable. For air and sea shipping: moisture barrier bag packaging compulsory for all models and wooden crate specifically compulsory for MOON 120 and MOON 200 models.

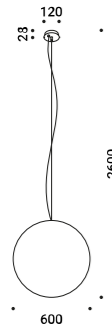

MOON 60
 Max 15W - E27
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
 C E IP20

Standard - ON/OFF


| 1A2820000.00.00 |

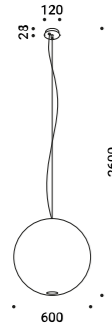

MOON 60 DE
 Dual emission
 Max 15W - E27 + Max 10W - GU10
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
 C E IP20

Standard - ON/OFF


| 1A2830000.00.00 |

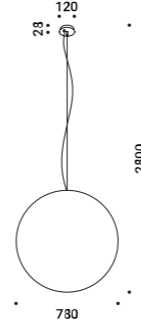

MOON 80
 Max 15W - E27
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
 C E IP20

Standard - ON/OFF


| 1A2840000.00.00 |

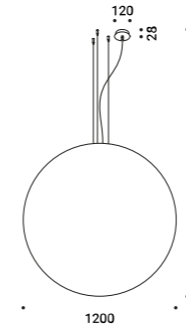

MOON 120
 Max 2x25W - E27
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
 C E IP20

Standard - ON/OFF

| 1A2850000.00.00 |

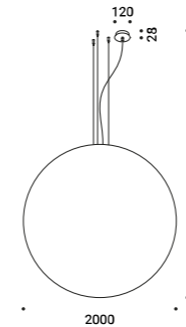








MOON 200
 Max 4x25W - E27
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
 Transport excluded
 C E IP20

Standard - ON/OFF

| 1A2860000.00.00 |

Optional accessories

Bulbs			
	LED - GU10 - PAR16		Not included
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	MOON 60 DE	1Y0330500
	LED - E27 - A60		Not included
	220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	MOON 60 / MOON 60 DE / MOON 80 / MOON 200	1Y0330790
	LED - E27 - A150		Not included
	220-240V - 20W - 200° 2700K - 2452lm - CRI >80 Energy Efficiency E - Dimmable	MOON 120	1Y2160020
Suspension kits			
	Sloped rose suspension kit		Not included
	Nickel plated - 1 Piece	MOON 60 / MOON 60 DE / MOON 80	1A0520000.00.00
	Sloped ceiling suspension kit		Not included
	Nickel plated - 1 Piece	MOON 120	1A0510000.00.00
	Decentralization kit		Not included
			1A0360000.00.00
	Kit ceiling rose and decentralizer		Not included
	Matt White	White cable 3 m included	1A0770300.00.00
	Matt Black	Black cable 3 m included	1A0770400.00.00

Optional accessories

Other accessories			
	Moisture barrier bag		Not included
	Packaging for air and sea shipping	MOON 60 / MOON 60 DE	4A2820010
	Moisture barrier bag		Not included
	Packaging for air and sea shipping	MOON 80	4A2840010
	Moisture barrier bag		Not included
	Packaging for air and sea shipping	MOON 120	49860020
	Moisture barrier bag		Not included
	Packaging for air and sea shipping	MOON 200	48780030
	Wooden crate		Not included
	Packaging for air and sea shipping	MOON 120	49860010
	Wooden crate		Not included
	Packaging for air and sea shipping	MOON 200	48780020



NEURO

Davide Groppi - Beppe Merlano / 2013

The idea is to bring light wherever you like, starting from a socket.
A simple project, almost a revival of the old electrical wiring.
A plug, a cable, some isolators, a socket and a LED.
Outdoor version also available.
Design Plus Award 2014




NEURO

Davide Groppi - Beppe Merlano / 2013

Suspension / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Suspension luminaire. Five cable clips included. Matt white cable clips and white cable for the matt white finish. Matt black cable clips and black cable for the matt black finish.



NEURO

Max 15W - E27
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
 CE IP20

Matt White - ON/OFF
 Matt Black - ON/OFF

1A0160309.00.00
 1A0160409.00.00

Optional accessories

Installation kits



Clamp		Included
Matt White	1 Piece	1A3270300.00.00
Matt Black	1 Piece	1A3270400.00.00



Wall and ceiling rose		Not included
Matt White		1A3440300.00.00
Matt Black		1A3440400.00.00

Bulbs



LED - E27 - PAR30s		Not included
	220-240V - 9,5W - 25° 3000K - 760lm - CRI >80 Energy Efficiency F - Dimmable	1Y0330730






The light in the plate is the most beautiful light.
Light as an ingredient, used courteously but at the same time decisively.

Suspension / Direct / Indoor

Material Metal
Finish .03 Matt White

Note Suspension luminaire. Matt white rose. White cable.



OVO

Max 20W - GU4 - 12V
 230-240V - 50/60Hz
 ON/OFF
 Bulb not included
 CE IP20 0,5 m

Matt White - ON/OFF

| 1A2890300.00.00 |

Optional accessories

Bulbs



LED - GU4 - MR11

Not included

12V - 4W - 24°
 2700K - 200lm - CRI >80
 Energy Efficiency G

1Y0330450



OVONELPIATTO

Massimiliano Alajmo - Raffaele Alajmo / 2010



The light in the plate is the most beautiful light.
Light as an ingredient, used courteously but at the same time decisively.


OVONELPIATTO

Massimiliano Alajmo - Raffaele Alajmo / 2010

Suspension / Direct / Indoor

Material Metal
Finish .03 Matt White

Note Suspension luminaire. Matt white rose. White cable.

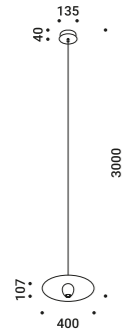

OVONELPIATTO

Max 20W - GU4 - 12V
230-240V - 50/60Hz
ON/OFF

Bulb not included

CE IP20 0,5 m

Matt White - ON/OFF

1A2880300.00.00

Optional accessories

Bulbs



LED - GU4 - MR11

Not included

12V - 4W - 24°
2700K - 200lm - CRI >80
Energy Efficiency G

1Y0330450





REFLEX S


Michele Groppi / 2023

A powerful LED and a subtle mirror.
A magic and almost invisible lighting solution,
which provides an indirect light that multiplies spaces
and gives the eye unprecedented perspectives, unexpected depths, illusions of light.
Wall version also available.
Luminaire designed also to be powered by ENDLESS conductive tape.

Suspension / Indirect / Indoor

Material Metal - Mirror
Finish .04 Matt Black

Note Suspension luminaire. Plane with mirror finish. Matt black rear plane. Matt white rose. AISI 304 stainless steel suspension cables. Black cable. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS. REFLEX S 2: version with power cable only and without rose.

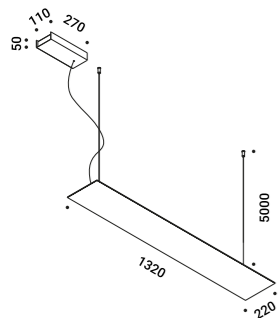


REFLEX S 1

Ceiling driver version
 54W
 110-240V - 50/60Hz
 2700K - 5787lm / 3000K - 6156lm
 CRI >90
 Driver integrated
 DALI - PUSH - 1-10V

CE IP20

Matt Black - 2700K - DALI - PUSH - 1-10V
 Matt Black - 3000K - DALI - PUSH - 1-10V

1A4790400.27.07
 1A4790400.30.07

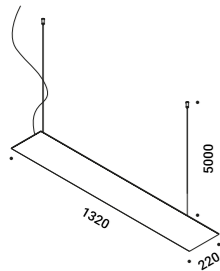

REFLEX S 2

Remote driver version
 49W
 Max 500mA DC
 2700K - 5787lm / 3000K - 6156lm
 CRI >90
 Driver not included


CE IP20 TE

Matt Black - 2700K
 Matt Black - 3000K

1A4790400.27.20
 1A4790400.30.20

Compulsory accessories

Drivers



Driver		Not included	
220-240V(100-127V)	1000mA/60W(40W)/IP20/DALI	REFLEX S 2	1Z0241140.1000

Optional accessories


Suspension kits



Recessed suspension kit for 12,5 mm plasterboard		Not included	
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000300.01.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000400.01.00
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	REFLEX S 2	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	REFLEX S 2	1X0000400.04.00



Ceiling suspension kit		Not included	
Matt White	For suspension cables - 1 Piece		1X0010300.01.00
Matt Black	For suspension cables - 1 Piece		1X0010400.01.00
Matt White	For electrical cables - 1 Piece	REFLEX S 2	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	REFLEX S 2	1X0010400.04.00



Wall adapter plate		Not included	
Matt White	For mounting on brick masonry walls		1X0050300.01.00

SHANGHAI

Davide Groppi / 2013




The smallest possible shape.
A suspended luminous segment.
Beautiful by itself or in composition.
Suitable for working area or kitchen.

Luminaire designed also to be powered by ENDLESS conductive tape.

Suspension / Direct / Indoor

Material Metal - Methacrylate
Finish .03 Matt White .08 Brushed Brass

Note Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cables. Transparent cable. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS. SHANGHAI 2: version with power cable only and without rose.

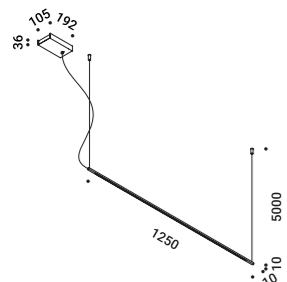


SHANGHAI 1

Ceiling driver version
 15,5W
 110-240V - 50/60Hz
 2700K - 592lm / 3000K - 619lm
 CRI >90
 Driver integrated
 PUSH
 CE IP20

Matt White - 2700K - PUSH
 Matt White - 3000K - PUSH
 Brushed Brass - 2700K - PUSH
 Brushed Brass - 3000K - PUSH

1A3260300.27.04
 1A3260300.30.04
 1A3260800.27.04
 1A3260800.30.04

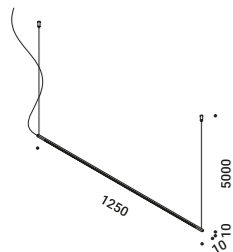

SHANGHAI 2


Remote driver version
 13W
 24V DC
 2700K - 592lm / 3000K - 619lm
 CRI >90
 Driver not included
 CE IP20 TE

Matt White - 2700K
 Matt White - 3000K
 Brushed Brass - 2700K
 Brushed Brass - 3000K


1A3260300.27.20
 1A3260300.30.20
 1A3260800.27.20
 1A3260800.30.20

Compulsory accessories


Drivers



Driver				Not included
220-240V(100-127V)	24V/16W(15W)/IP20/DALI	SHANGHAI 2	1Z0241180.24	




Driver				Not included
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH	SHANGHAI 2	1Z0240870.24	



Driver				Not included
220-240V	24V/20W/IP20/TRIAC/IGBT	SHANGHAI 2	1Z0240850.24	

Optional accessories

Suspension kits




Sloped ceiling suspension hook				Not included
	Chrome plated - 1 Piece		1A0530000.00.00	



Recessed suspension kit for 12,5 mm plasterboard				Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000300.01.00	
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000400.01.00	
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SHANGHAI 2	1X0000300.04.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SHANGHAI 2	1X0000400.04.00	



Ceiling suspension kit				Not included
Matt White	For suspension cables - 1 Piece		1X0010300.01.00	
Matt Black	For suspension cables - 1 Piece		1X0010400.01.00	
Matt White	For electrical cables - 1 Piece	SHANGHAI 2	1X0010300.04.00	
Matt Black	For electrical cables - 1 Piece	SHANGHAI 2	1X0010400.04.00	



Wall adapter plate				Not included
Matt White	For mounting on brick masonry walls		1X0050300.01.00	

SIMBIOSI

Davide Groppi / 2015



A de-structured chandelier that can be re-assembled as you like.
A conjuring trick that gives you the possibility of connecting the diodes in series using
very weak electric currents with wires that are practically invisible.
The very thin wire that connects the light sources and brings them alive, one in relation
to the other, is the principal component of this project.


SIMBIOSI

Davide Groppi / 2015

Suspension / Direct / Indoor

Material Metal
Finish .03 Matt White .26 Total Black

Note Suspension luminaire. Matt white rose and red cables for the matt white finish. Matt black rose and anthracite grey cables for the matt black finish. AISI 304 stainless steel suspension cables.

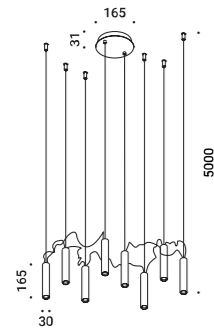


SIMBIOSI

15W
 110-240V - 50/60Hz
 2700K - 931lm / 3000K - 960lm
 CRI >90
 Driver integrated
 DALI
 CE IP20

Matt White - 2700K - DALI
 Matt White - 3000K - DALI
 Total Black - 2700K - DALI
 Total Black - 3000K - DALI

1A2870300.27.01
 1A2870300.30.01
 1A2872600.27.01
 1A2872600.30.01

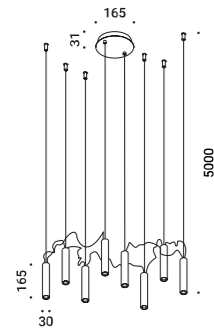

SIMBIOSI


15W
 110-240V - 50/60Hz
 2700K - 931lm / 3000K - 960lm
 CRI >90
 Driver integrated
 PUSH
 CE IP20

Matt White - 2700K - PUSH
 Matt White - 3000K - PUSH
 Total Black - 2700K - PUSH
 Total Black - 3000K - PUSH

1A2870300.27.04
 1A2870300.30.04
 1A2872600.27.04
 1A2872600.30.04

Optional accessories

Suspension kits




Sloped ceiling suspension hook

Not included

Chrome plated - 1 Piece


1A0530000.00.00

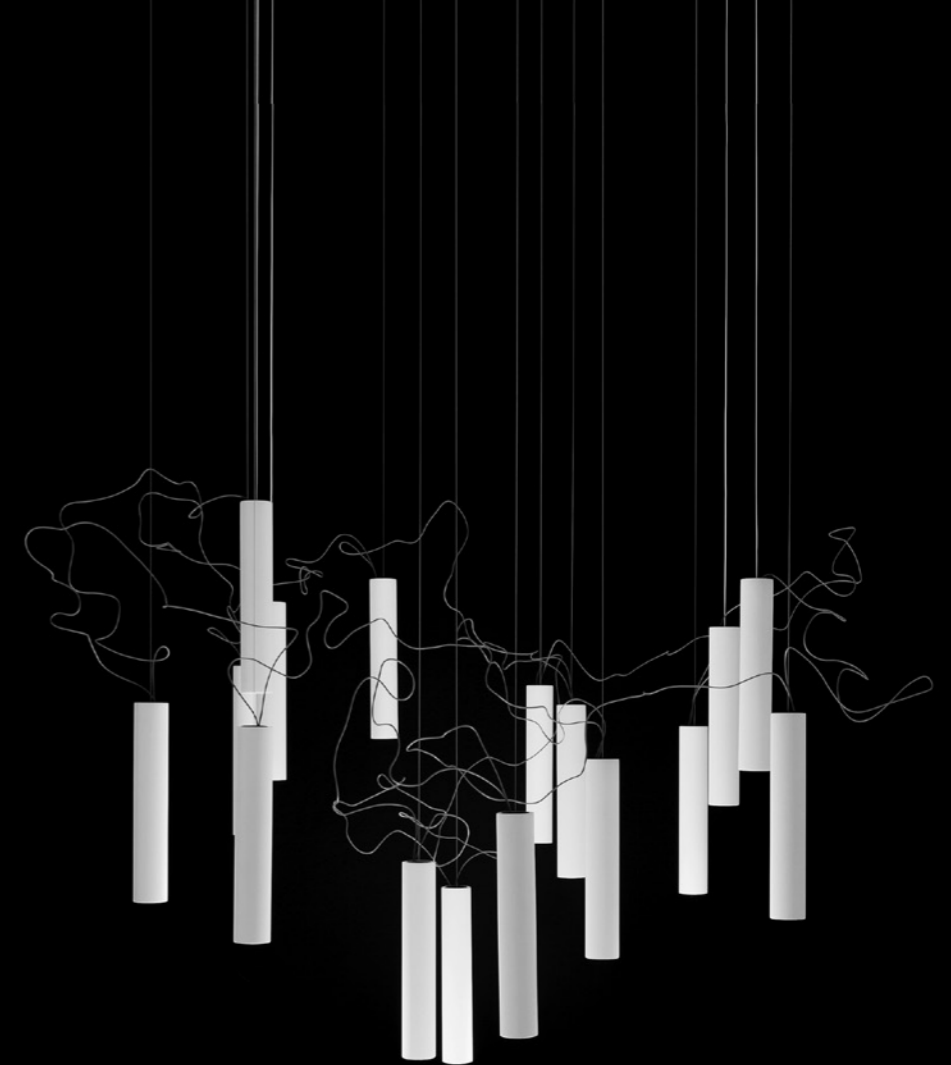

SOTTILE

Daide Groppi / 2023


A blade of light just 7 millimetres thick,
the expression of that purest and most essential part of our thought.
The surprise of an extremely thin, yet at the same time very bright, lamp.
Luminaire designed also to be powered by ENDLESS conductive tape.

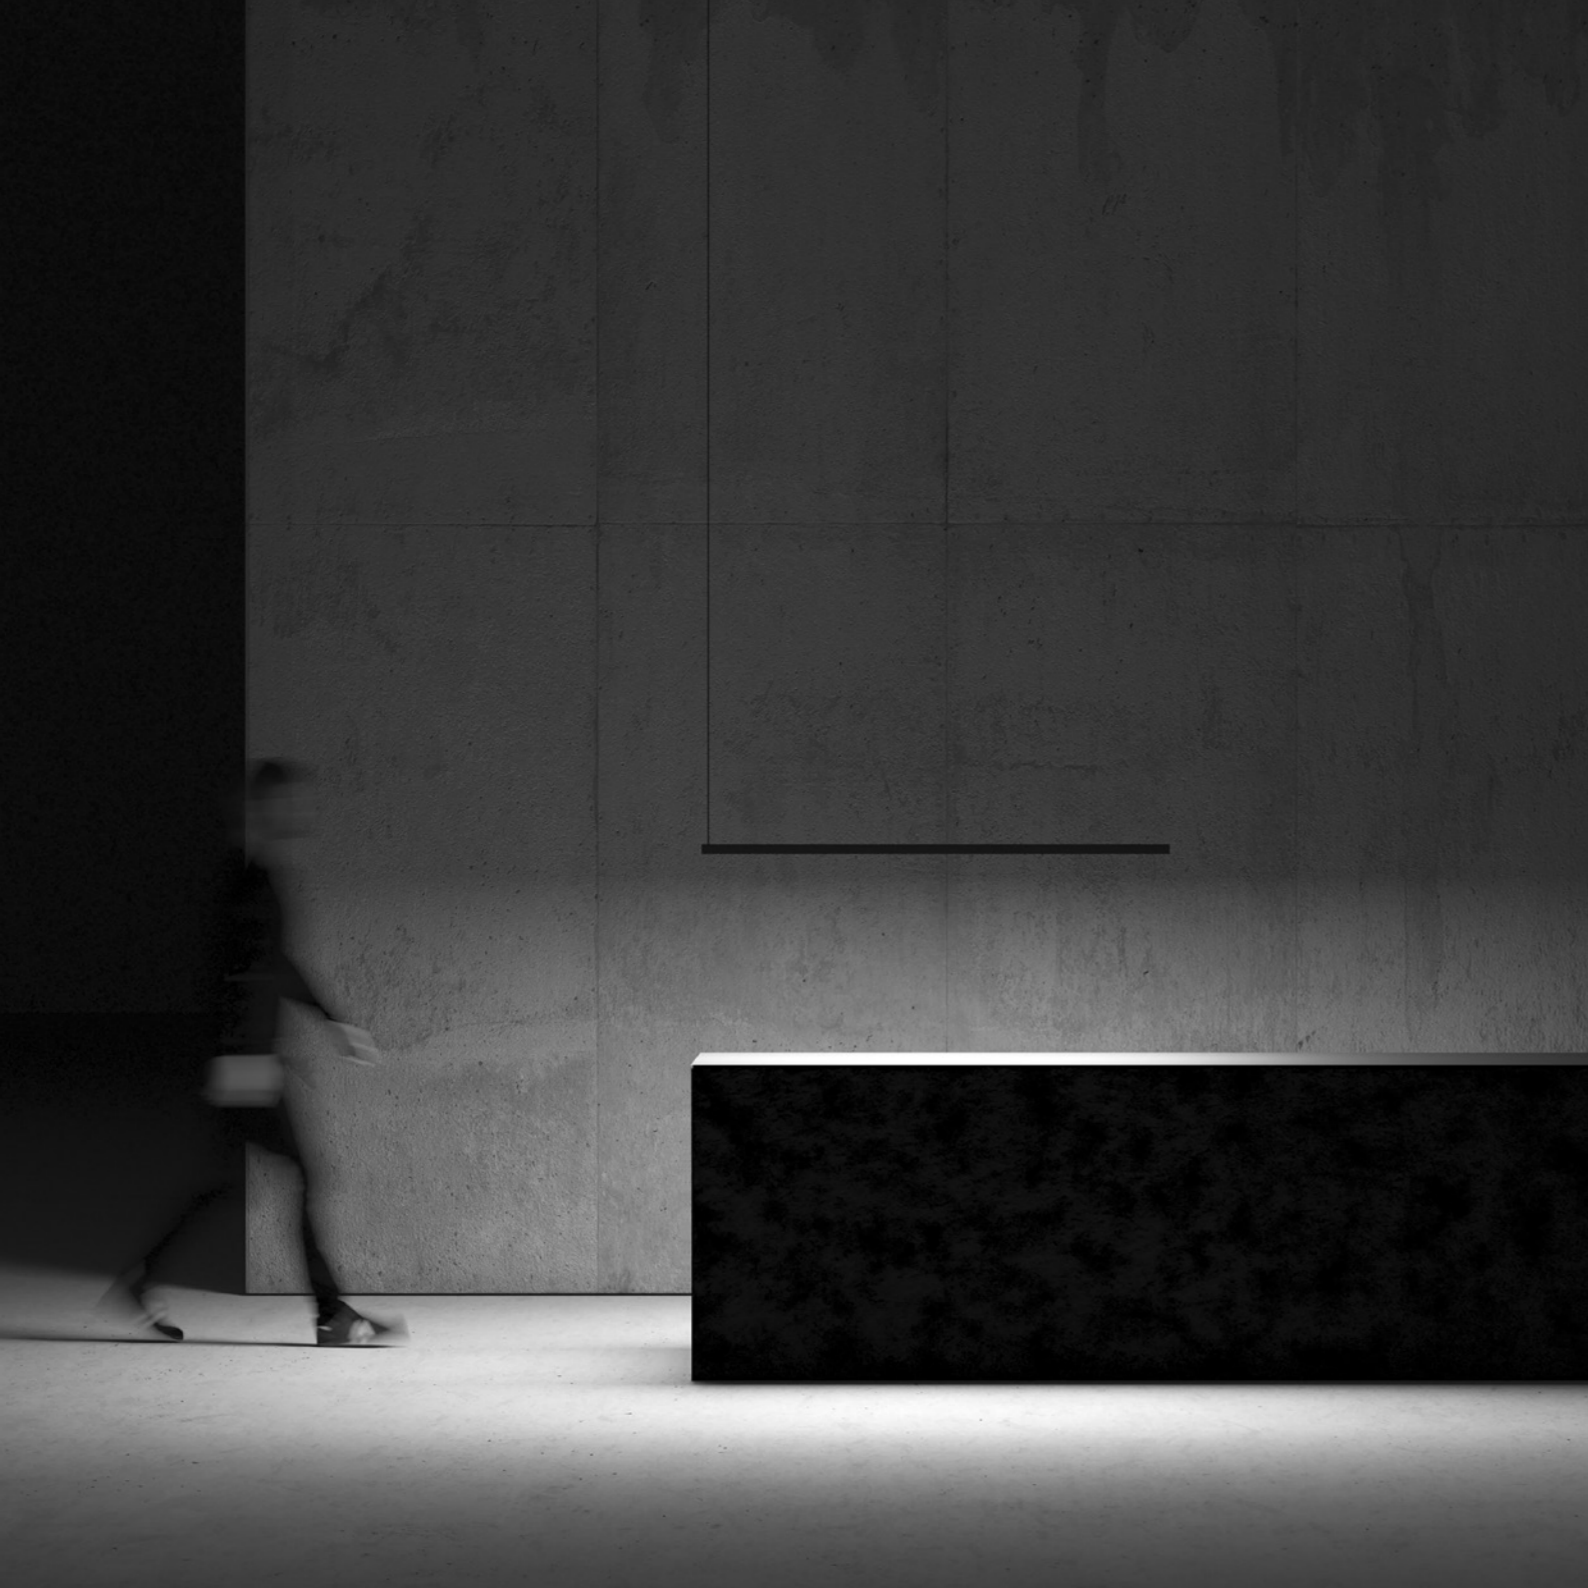

Suspension / Direct / Indoor

Material Metal
Finish **.29** Brushed Bronze **.36** Brushed Black

Note Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cable. Black cable. Luminaire designed to be powered by our ENDLESS conductive tape and dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS. SOTTILE 1 DE and SOTTILE 2 DE: dual emission version. SOTTILE 2 and SOTTILE 2 DE: version with power cable only and without rose.

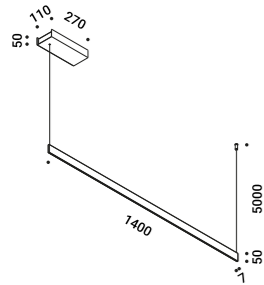


SOTTILE 1

Ceiling driver version
 22W
 220-240V - 50/60Hz
 2700K - 1692lm / 3000K - 1855lm
 CRI >90
 Driver integrated
 DALI - PUSH - 1-10V - TRIAC

CE IP20

Brushed Bronze - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4232900.27.05
Brushed Bronze - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4232900.30.05
Brushed Black - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4233600.27.05
Brushed Black - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4233600.30.05

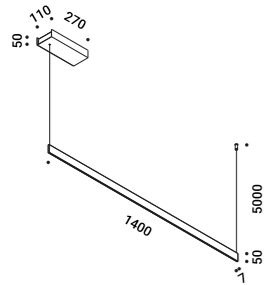


SOTTILE 1 DE

Ceiling driver version - Dual emission
 2x22W
 120-240V - 50/60Hz
 2700K - Up 1692lm - Down 1692lm /
 3000K - Up 1855lm - Down 1855lm
 CRI >90
 Driver integrated
 DALI - PUSH - 1-10V - TRIAC

CE IP20

Brushed Bronze - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4642900.27.05
Brushed Bronze - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4642900.30.05
Brushed Black - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4643600.27.05
Brushed Black - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4643600.30.05

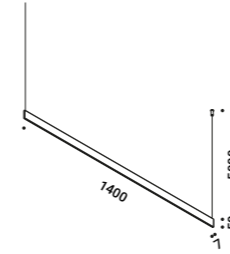


SOTTILE 2

Remote driver version
 19W
 24V DC
 2700K - 1692lm / 3000K - 1855lm
 CRI >90
 Driver not included

CE IP20 E

Brushed Bronze - 2700K	1A4232900.27.20
Brushed Bronze - 3000K	1A4232900.30.20
Brushed Black - 2700K	1A4233600.27.20
Brushed Black - 3000K	1A4233600.30.20

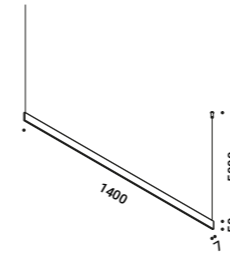

SOTTILE 2 DE



Remote driver version - Dual emission
 2x19W
 24V DC
 2700K - Up 1692lm - Down 1692lm /
 3000K - Up 1855lm - Down 1855lm
 CRI >90
 Driver not included

CE IP20 E

Brushed Bronze - 2700K	1A4642900.27.20
Brushed Bronze - 3000K	1A4642900.30.20
Brushed Black - 2700K	1A4643600.27.20
Brushed Black - 3000K	1A4643600.30.20

Compulsory accessories

Drivers



Driver				Not included
100-240V	24V/50W/IP20/ON/OFF	SOTTILE 2 / SOTTILE 2 DE	1Z1120490	

Controller				Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	SOTTILE 2 / SOTTILE 2 DE	1Z2170010	

Optional accessories


Suspension kits




Recessed suspension kit for 12,5 mm plasterboard			Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.01.00	
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.01.00	
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SOTTILE 2 / SOTTILE 2 DE 1X0000300.04.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SOTTILE 2 / SOTTILE 2 DE 1X0000400.04.00	



Ceiling suspension kit			Not included
Matt White	For suspension cables - 1 Piece	1X0010300.01.00	
Matt Black	For suspension cables - 1 Piece	1X0010400.01.00	
Matt White	For electrical cables - 1 Piece	SOTTILE 2 / SOTTILE 2 DE 1X0010300.04.00	
Matt Black	For electrical cables - 1 Piece	SOTTILE 2 / SOTTILE 2 DE 1X0010400.04.00	



Wall adapter plate			Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00	

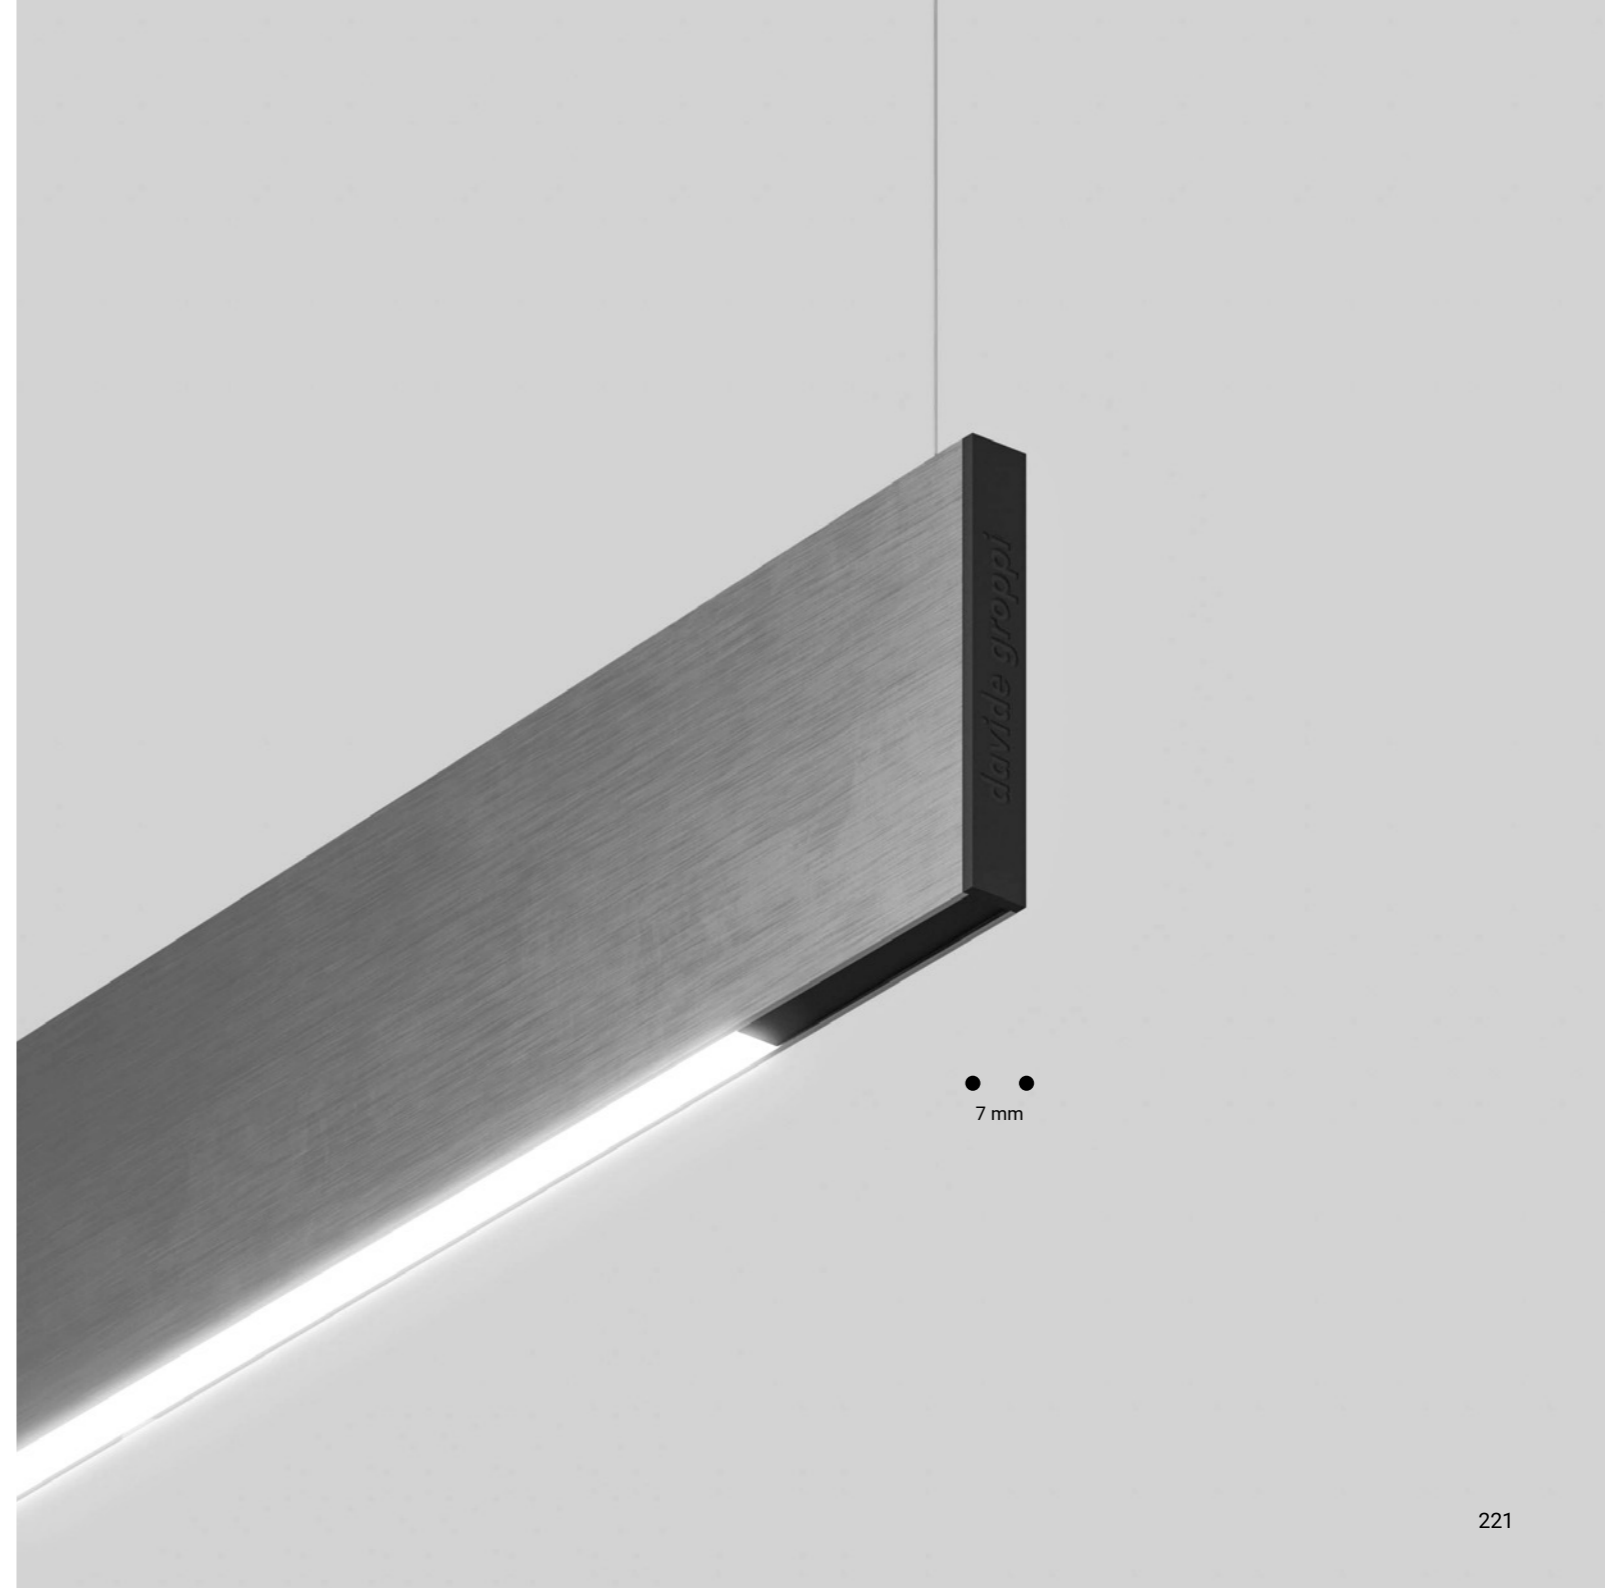

SOTTOSOPRA

Daide Groppi / 2023


The purity of the suspended cone encases a small light machine that produces direct, indirect and diffused light at the same time.
Sottosopra: pure, elegant, wonderfully efficient.



Suspension / Direct-Indirect / Indoor

Material Metal
Finish .03 Matt White

Note Suspension luminaire. Matt white rose. Dual emission and on/off. White cable. SOTTOSOPRA 2: version with power cable only and without rose.

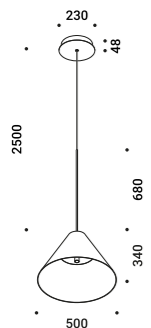


SOTTOSOPRA 1

Ceiling driver version
 24W
 240V - 50/60Hz
 2700K - Down 228lm - Up 1827lm /
 3000K - Down 245lm - Up 1876lm
 CRI >90
 UGR <19
 Driver integrated
 TRIAC/IGBT
 CE IP20

Matt White - 2700K - TRIAC/IGBT
 Matt White - 3000K - TRIAC/IGBT

1A4540300.27.02
 1A4540300.30.02

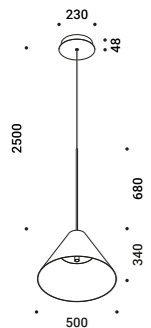


SOTTOSOPRA 1

Ceiling driver version
 24W
 100-240V - 50/60Hz
 2700K - Down 228lm - Up 1827lm /
 3000K - Down 245lm - Up 1876lm
 CRI >90
 UGR <19
 Driver integrated
 DALI - PUSH - 1-10V
 CE IP20

Matt White - 2700K - DALI - PUSH - 1-10V
 Matt White - 3000K - DALI - PUSH - 1-10V

1A4540300.27.07
 1A4540300.30.07

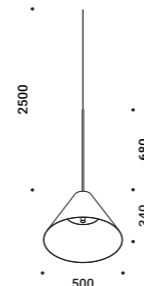

SOTTOSOPRA 2


Remote driver version
 30W
 Max 500mA DC
 2700K - Down 228lm - Up 1827lm /
 3000K - Down 245lm - Up 1876lm
 CRI >90
 UGR <19
 Driver not included
 2 Drivers required
 CE IP20

Matt White - 2700K
 Matt White - 3000K


1A4540300.27.20
 1A4540300.30.20

Compulsory accessories

Drivers



Driver				Not included
220-240V(110-127V)	500mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	SOTTOSOPRA 2	1Z0241270.500	




Driver				Not included
220-240V	500mA/20W/IP20/TRIAC/IGBT	SOTTOSOPRA 2	1Z0240850.500	

Optional accessories

Suspension kits



Recessed suspension kit for 12,5 mm plasterboard			Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SOTTOSOPRA 2	1X0000300.05.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SOTTOSOPRA 2	1X0000400.05.00

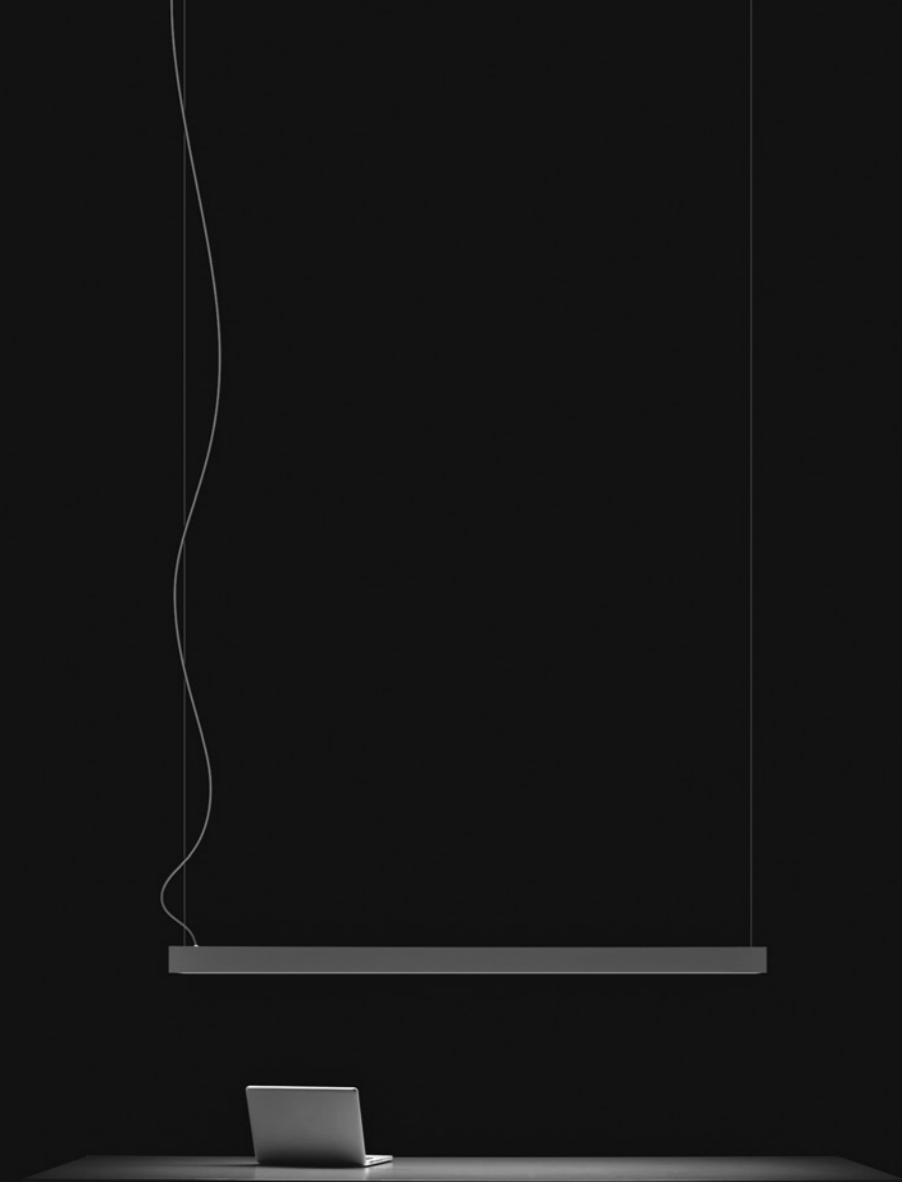


A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Suspension / Direct / Indoor

Material Metal - Polycarbonate
Finish .03 Matt White


Note Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cables. White cable. SPY DE: version with dual emission and on/off. Transparent cable.

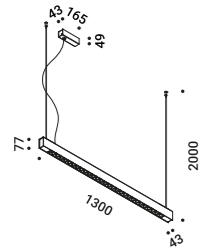

SPY
 39W
 110-240V - 50/60Hz
 3000K - 4292lm
 CRI >80
 UGR <19
 Driver integrated
 DALI
 CE IP20

Matt White - 3000K - DALI

| 1A2910300.30.01 |

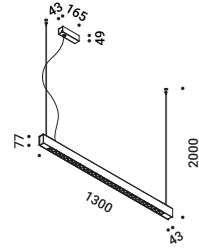

SPY DE
 Dual emission
 77W
 110-240V - 50/60Hz
 3000K - Down 4292lm - Up 4360lm
 CRI >80
 UGR <19
 Driver integrated
 DALI
 CE IP20

Matt White - 3000K - DALI

| 1A2940300.30.01 |

Optional accessories

Suspension kits



Sloped ceiling suspension kit		Not included
Nickel plated - 1 Piece	1A0510000.00.00	



Recessed suspension kit for 12,5 mm plasterboard		Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.03.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.03.00



Ceiling suspension kit		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.03.00
Matt Black	For suspension cables - 1 Piece	1X0010400.03.00



Wall adapter plate		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

WALL

DOT P

Omar Carraglia - Davide Groppi / 2015



A tool to light.


A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.

Luminaire available also in ENDLESS version.

Wall-Ceiling / Direct / Indoor

Material Metal
Finish **.03** Matt White **.04** Matt Black


Note Wall luminaire. Adjustable in all directions. DOT P DE and DOT P DE 51: dual emission versions. DOT P ENDLESS and DOT P ENDLESS CASAMBI: luminaires dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). They can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.



DOT P
 13W
 100-240V - 50/60Hz
 2700K / 3000K
 CRI >97
 Driver integrated
 DALI
CE IP20

Matt White - 2700K - DALI
 Matt White - 3000K - DALI
 Matt Black - 2700K - DALI
 Matt Black - 3000K - DALI


1A2340300.27.01
 1A2340300.30.01
 1A2340400.27.01
 1A2340400.30.01



DOT P
 13W
 100-240V - 50/60Hz
 2700K / 3000K
 CRI >97
 Driver integrated
 PUSH
CE IP20

Matt White - 2700K - PUSH
 Matt White - 3000K - PUSH
 Matt Black - 2700K - PUSH
 Matt Black - 3000K - PUSH


1A2340300.27.04
 1A2340300.30.04
 1A2340400.27.04
 1A2340400.30.04



DOT P 51
 Max 10W - GU10
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
CE IP20

Matt White - ON/OFF
 Matt Black - ON/OFF


1A2490300.00.00
 1A2490400.00.00



DOT P ENDLESS
 ENDLESS version only
 13W - 0,34A
 48V DC
 2700K / 3000K
 CRI >97
 Driver not included
 See page ENDLESS
CE IP20 E

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K


1A2340300.27.40
 1A2340300.30.40
 1A2340400.27.40
 1A2340400.30.40



DOT P ENDLESS CASAMBI
 ENDLESS version only
 15,5W - 0,4A
 48V DC
 2700K / 3000K
 CRI >97
 Driver not included
 See page ENDLESS
CE IP20 E A

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K

1A2340300.27.41
 1A2340300.30.41
 1A2340400.27.41
 1A2340400.30.41




DOT P DE

Dual emission
 29W
 220-240V - 50/60Hz
 2700K / 3000K
 CRI >97
 Driver integrated
 DALI
 CE IP20

Matt White - 2700K - DALI
 Matt White - 3000K - DALI
 Matt Black - 2700K - DALI
 Matt Black - 3000K - DALI

1A4900300.27.01
 1A4900300.30.01
 1A4900400.27.01
 1A4900400.30.01



DOT P DE 51

Dual emission
 Max 2x10W - GU10
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
 CE IP20

Matt White - ON/OFF
 Matt Black - ON/OFF

1A3810300.00.00
 1A3810400.00.00

Compulsory accessories


Other accessories



Lens			Not included
Beam - 14°	2700K - CRI >97 - 983lm	DOT P	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 983lm	DOT P ENDLESS	
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 983lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 1966lm	DOT P DE	
Beam - 24°	2700K - CRI >97 - 943lm	DOT P	1A3100000.00.00
	3000K - CRI >97 - 996lm		
	2700K - CRI >97 - 943lm	DOT P ENDLESS	
	3000K - CRI >97 - 996lm		
	2700K - CRI >97 - 943lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 996lm		
	2700K - CRI >97 - 1886lm	DOT P DE	
Beam - 36°	2700K - CRI >97 - 955lm	DOT P	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 955lm	DOT P ENDLESS	
	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 955lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 1910lm	DOT P DE	
Beam - 50°	2700K - CRI >97 - 965lm	DOT P	1A3120000.00.00
	3000K - CRI >97 - 1016lm		
	2700K - CRI >97 - 965lm	DOT P ENDLESS	
	3000K - CRI >97 - 1016lm		
	2700K - CRI >97 - 965lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 1016lm		
	2700K - CRI >97 - 1930lm	DOT P DE	
3000K - CRI >97 - 2032lm			

Optional accessories


Other accessories



Accessory holder + Honeycomb louvre				Not included
		DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080400.01.00	



Elliptical filter				Not included
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080000.02.00	



Blue filter				Not included
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080000.03.00	



Red filter				Not included
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080000.04.00	



Yellow filter				Not included
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080000.05.00	

Optional accessories

Bulbs



LED - GU10 - PAR16				Not included
		220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT P 51 / DOT P DE 51	1Y0330500




LED SORAA - GU10 - MR16				Not included
		230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT P 51 / DOT P DE 51	1Y1580210




LED SORAA - GU10 - MR16				Not included
		230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT P 51 / DOT P DE 51	1Y1580010


Other accessories



Darklight				Not included
		LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580040



25° beam filter				Not included
		LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580020



36° beam filter				Not included
		LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580030



1

It is pure form.
A tool to light, simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

DUET


/ 2014

Wall / Diffuse / Indoor

Material Glass - Metal

Finish **.03** Matt White **.04** Matt Black

Note Wall luminaire. Dual emission.



DUET

23W

220-240V - 50/60Hz

2700K - 1293lm / 3000K - 1352lm

CRI >90

TRIAC/IGBT

CE IP20

Matt White - 2700K - TRIAC/IGBT

Matt White - 3000K - TRIAC/IGBT

Matt Black - 2700K - TRIAC/IGBT

Matt Black - 3000K - TRIAC/IGBT

1A3300300.27.02

1A3300300.30.02

1A3300400.27.02

1A3300400.30.02

EDISON'S NIGHTMARE

Harry Thaler / 2014



A gestural project, full of irony and nostalgia.
Therefore, among a thousand stories, prohibitions, absurd technical rules,
we have reached the end. The end of the incandescent bulb.

Edison's Nightmare is a salute to Edison's light bulb*,
a dream that changed the way we live forever, stealing time to read and write from sleep.

It is a classic light bulb, nailed to the wall. Like a work of art.

** From 01 September 2012, incandescent bulbs cannot be sold in the EU.*


EDISON'S NIGHTMARE

Harry Thaler / 2014

Wall / Diffuse / Indoor

Material Blown glass - Metal
Finish .00 Standard

Note Wall luminaire. Blown glass diffuser. Dimmer on the cable. Transparent cable.

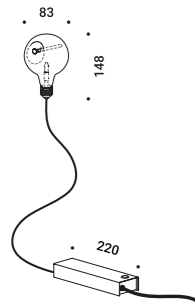

EDISON'S NIGHTMARE

Max 10W - G4 - 12V
100-240V - 50/60Hz
Driver integrated
Dimmer on board
Bulb included
CE IP20

Standard - Dimmer on board

| 1A3380009.00.06 |





A luminous short film.

Telling a story in light, a series of old 35MM slides are lit from behind, pulsating and shown at random.

The photographs can be assembled and replaced as you like.

The choice of the message to be communicated is completely personal: it can be an image, a logo, a sentence, anything you want to represent, at any time.

The light message is punctuated by a blinking LED, offering reading in movement.


FILM

Alessandra Dallagiovanna - Davide Groppi / 2010

Objects-Wall / Diffuse / Indoor

Material Metal - Polycarbonate
Finish .00 Standard

Note Modular wall luminaire. Matt black support. Customised images not included. Module connector included. Black cable.

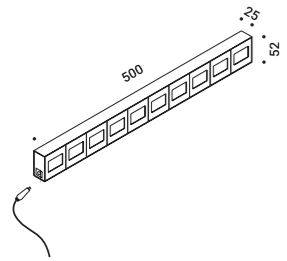


FILM
 3W
 5V DC
 Driver not included
 ON/OFF
 CE IP20

Standard - ON/OFF


| 1A3410000.00.00 |

Compulsory accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 15W - IP40	1Z1470180



Driver		Not included
100-240V	5V/17,5W/IP20/ON/OFF	1Z1120180





FOIL

967 DESIGN / 2011

An architectural lamp for wall and ceiling installation.
Although it's there, you can't see the thickness.
A luminaire that amazes with skill, so you only notice its two-dimensional effect.


FOIL

967 DESIGN / 2011

Wall / Indirect / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Wall luminaire.




FOIL

24,5W
220-230V - 50/60Hz
2700K - 1681lm / 3000K - 1808lm
CRI >90
TRIAC/IGBT
CE IP20

Matt White - 2700K - TRIAC/IGBT
Matt White - 3000K - TRIAC/IGBT
Matt Black - 2700K - TRIAC/IGBT
Matt Black - 3000K - TRIAC/IGBT

1A3150300.27.02
1A3150300.30.02
1A3150400.27.02
1A3150400.30.02

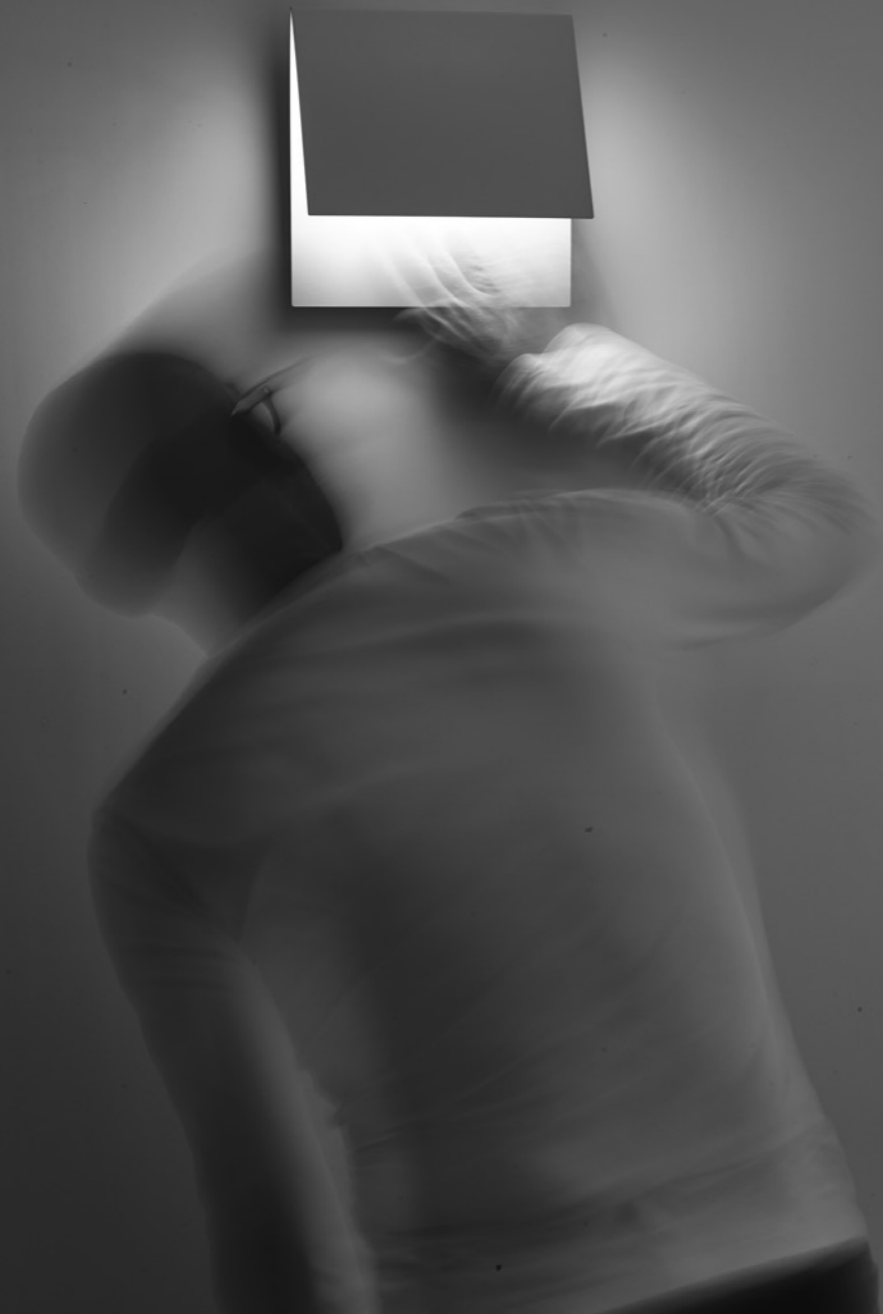

An indirect wall light project.
The light source remains invisible while the light comes out soft from the metal diffuser,
creating a delicate atmosphere.


FOLDER

967 DESIGN / 2013

Wall / Indirect / Indoor

Material Metal
Finish .03 Matt White

Note Wall luminaire.



FOLDER

20W

110-240V - 50/60Hz

2700K - 397lm / 3000K - 415lm

CRI >80

Driver integrated

DALI

CE IP20

Matt White - 2700K - DALI
Matt White - 3000K - DALI

1A3350300.27.01
1A3350300.30.01



LINET

Omar Carraglia / 2014



A tool to light.

The luminaire is pure form, a simple container for the light source.

Single-emission lamp with light directed downwards.


Light is incorporated into the space, becoming an architectural element.

LINET

Omar Carraglia / 2014

Wall / Diffuse / Indoor

Material Metal - Methacrylate
Finish .03 Matt White .04 Matt Black
Note Wall luminaire.



LINET

11,5W
220-240V - 50/60Hz
2700K - 626lm / 3000K - 655lm
CRI >90
TRIAC/IGBT
CE IP20

Matt White - 2700K - TRIAC/IGBT
Matt White - 3000K - TRIAC/IGBT
Matt Black - 2700K - TRIAC/IGBT
Matt Black - 3000K - TRIAC/IGBT

1A3310300.27.02
1A3310300.30.02
1A3310400.27.02
1A3310400.30.02





MIRA


Omar Carraglia / 2012

Lamp with a simple and essential shape.
For interiors and adjustable.
Luminaire available also in ENDLESS version.

Wall-Ceiling / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Wall luminaire. Adjustable in all directions. MIRA ENDLESS and MIRA ENDLESS CASAMBI: luminaires dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). They can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.




MIRA SWITCH

8W
 110-240V - 50/60Hz
 2700K - 327lm / 3000K - 352lm
 CRI >90
 Driver integrated
 ON/OFF
 CE IP20

Matt White - 2700K - ON/OFF
 Matt White - 3000K - ON/OFF
 Matt Black - 2700K - ON/OFF
 Matt Black - 3000K - ON/OFF

1A2280300.27.00
 1A2280300.30.00
 1A2280400.27.00
 1A2280400.30.00




MIRA

8W
 110-240V - 50/60Hz
 2700K - 327lm / 3000K - 352lm
 CRI >90
 Driver integrated
 DALI
 CE IP20

Matt White - 2700K - DALI
 Matt White - 3000K - DALI
 Matt Black - 2700K - DALI
 Matt Black - 3000K - DALI

1A2280300.27.01
 1A2280300.30.01
 1A2280400.27.01
 1A2280400.30.01




MIRA

8W
 110-240V - 50/60Hz
 2700K - 327lm / 3000K - 352lm
 CRI >90
 Driver integrated
 PUSH
 CE IP20

Matt White - 2700K - PUSH
 Matt White - 3000K - PUSH
 Matt Black - 2700K - PUSH
 Matt Black - 3000K - PUSH

1A2280300.27.04
 1A2280300.30.04
 1A2280400.27.04
 1A2280400.30.04




MIRA ENDLESS

ENDLESS version only
 6W - 0,16A
 48V DC
 2700K - 327lm / 3000K - 352lm
 CRI >90
 Driver not included
 See page ENDLESS
 CE IP20 TE

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K

1A2280300.27.40
 1A2280300.30.40
 1A2280400.27.40
 1A2280400.30.40



MIRA ENDLESS CASAMBI

ENDLESS version only
 8,5W - 0,22A
 48V DC
 2700K - 327lm / 3000K - 352lm
 CRI >90
 Driver not included
 See page ENDLESS
 CE IP20 TE A

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K

1A2280300.27.41
 1A2280300.30.41
 1A2280400.27.41
 1A2280400.30.41



MIRA MAGNETIC

Omar Carraglia / 2015

Lamp with a simple and essential shape.
For interiors and adjustable, it is designed with a magnetic application system
to be even more versatile and functional.


MIRA MAGNETIC

Omar Carraglia / 2015

Wall-Ceiling / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Wall luminaire. Adjustable in all directions. Magnetic fixing. Dimmer on the cable. White cable.



MIRA MAGNETIC

5,6W
 Max 500mA DC
 2700K - 327lm / 3000K - 352lm
 CRI >90
 Driver not included


CE IP20

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K


1A3680300.27.20
 1A3680300.30.20
 1A3680400.27.20
 1A3680400.30.20

Compulsory accessories

Drivers



Driver with plug		Not included
Matt White	Input 110-240V - 50/60Hz Output 350mA - 15W - IP20 Dimmer on board	1A3180300.00.06
Matt Black	Input 110-240V - 50/60Hz Output 350mA - 15W - IP20 Dimmer on board	1A3180400.00.06



Driver		Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH - 1-10V	1Z0240870.500



MORSETTO P

Daide Groppi / 2019



A lamp that can be positioned, balanced and turned,
but overall it produces a beautiful light on the table.
It's the wall version of the Morsetto lamp.
Three adjustable arms allow the light source to be positioned
far from where the lamp is attached.
Table version also available.


MORSETTO P

Davide Groppi / 2019

Wall / Direct / Indoor

Material Metal
Finish .04 Matt Black

Note Wall luminaire. Adjustable in all directions. Dimmer on the cable. Black cable.

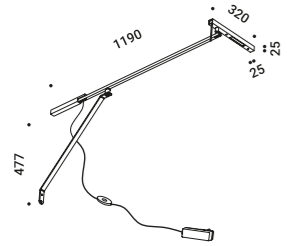

MORSETTO P

13W
24V DC
2700K - 765lm / 3000K - 823lm
CRI >90
UGR <19
Dimmer on board
Driver with plug included




Matt Black - 2700K - Dimmer on board
Matt Black - 3000K - Dimmer on board

1A2570400.27.06
1A2570400.30.06

Optional accessories

Drivers



Driver with plug

Matt Black
Input 110-240V - 50/60Hz
Output 24V DC - 18W - IP20

1Z0431020

Included





PIÙ

Davide Groppi / 2007

A tool to light.
Pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.


PIÙ

Davide Groppi / 2007

Wall / Indirect / Indoor

Material Metal
Finish .03 Matt White

Note Wall luminaire. Dual emission.



PIÙ

Max 120W - R7s
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20

Matt White - ON/OFF

| 1A3370300.00.00 |

Optional accessories

Bulbs





LED - R7s COB - 118 mm

Not included

220-240V - 8W - 330°
3000K - 1000lm - CRI >80
Energy Efficiency E

1Y0000139

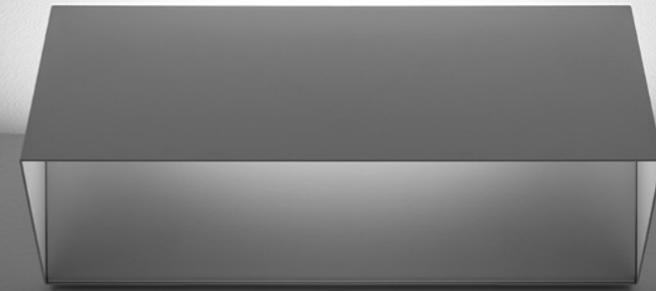

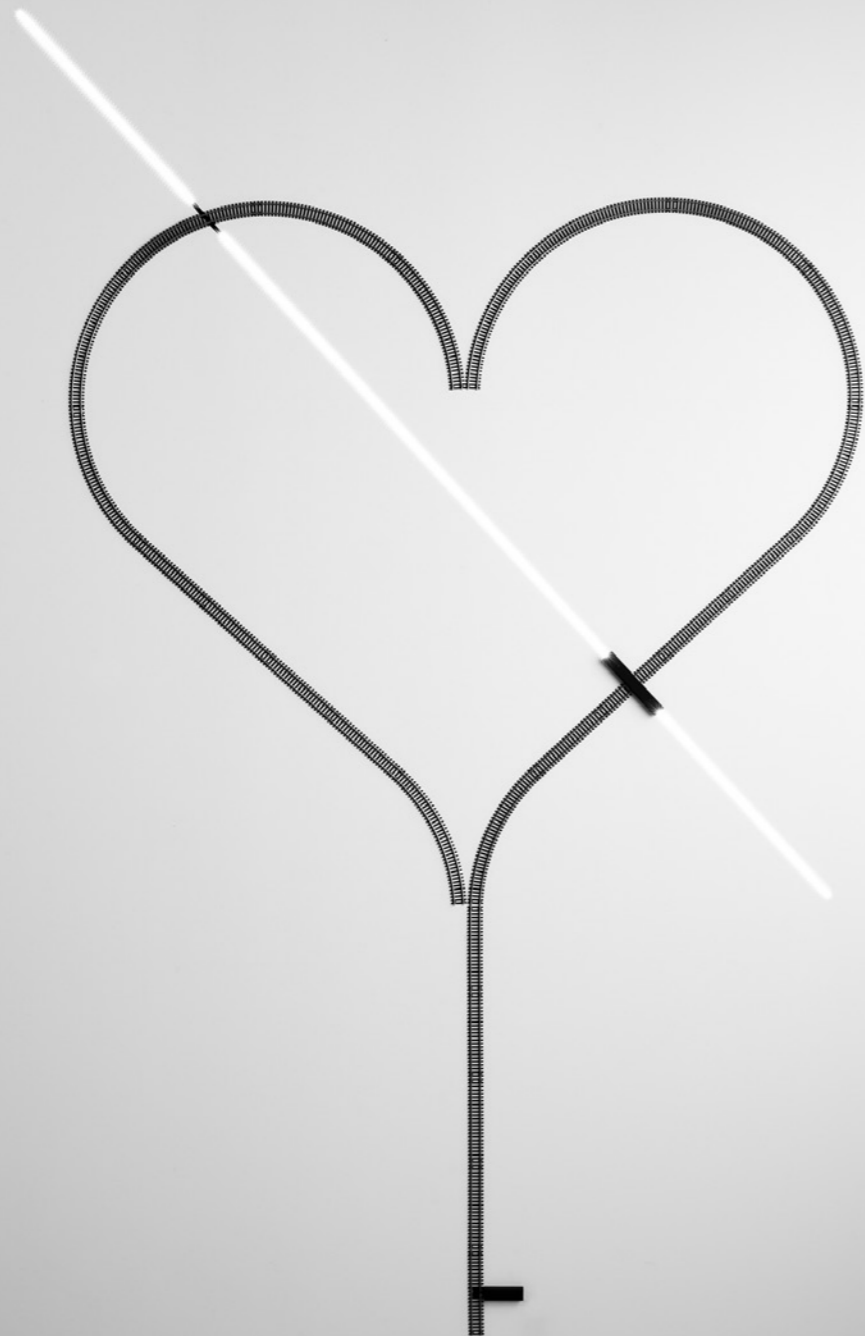

A ready-made project to design the space with a sense of irony and weightlessness. The tracks of an electric train can be used to draw a heart, but also to conduct electricity. Rail is the boundary between usefulness and show, between art and design.


RAIL

Davide Groppi / 2019

Wall / Direct / Indoor

Material ABS - Metal
Finish .00 Standard


Note Wall luminaire. Matt black modular tracks. Dimmer on the cable. Black cable.

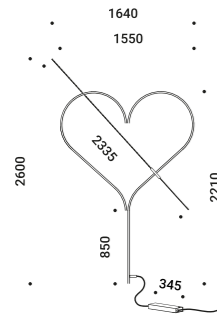

RAIL
22W
24V DC
3000K - 2000lm
CRI >90
Driver included
Dimmer on board
CE IP20

Standard - 3000K - Dimmer on board

1A3400009.30.06

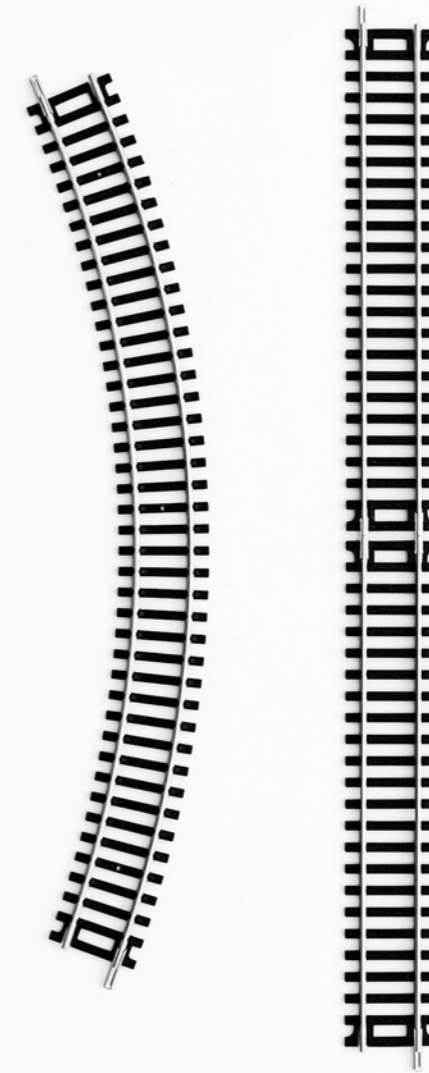



REFLEX

Michele Groppi / 2022

A powerful LED and a subtle mirror.
A magic and almost invisible lighting solution,
which provides an indirect light that multiplies spaces
and gives the eye unprecedented perspectives,
unexpected depths, illusions of light.
Suspension version also available.
Luminaire designed also to be powered by ENDLESS system.


REFLEX

Michele Groppi / 2022

Wall / Indirect / Indoor

Material Metal - Mirror
Finish .04 Matt Black

Note Wall luminaire. Plane with mirror finish. Matt black rear plane.
 Possibility for the luminaire to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.



REFLEX

23W - 0,57A
 48V DC
 2700K - 2158lm / 3000K - 2320lm
 CRI >90
 Driver not included




Matt Black - 2700K
 Matt Black - 3000K


1A0850400.27.20
 1A0850400.30.20

Compulsory accessories

Drivers



Driver		Not included
100-240V	48V/60W/IP67/ON/OFF	1Z1120640



Driver		Not included
220-240V	48V/60W/IP20/DALI	1Z0830820



SHADE

Federico Delrosso / 2013



Reflections of light.

The pure and essential form of a thin mirror wich provides indirect light.

SHADE


Federico Delrosso / 2013

Wall / Indirect / Indoor

Material Metal - Mirror

Finish .00 Standard

Note Wall luminaire. Plane with mirror finish. Dual emission.



SHADE

23W

220-240V - 50/60Hz

2700K - 1293lm / 3000K - 1352lm

CRI >90

Driver integrated

TRIAC/IGBT

CE IP20


Standard - 2700K - TRIAC/IGBT

1A3360000.27.02

Standard - 3000K - TRIAC/IGBT

1A3360000.30.02



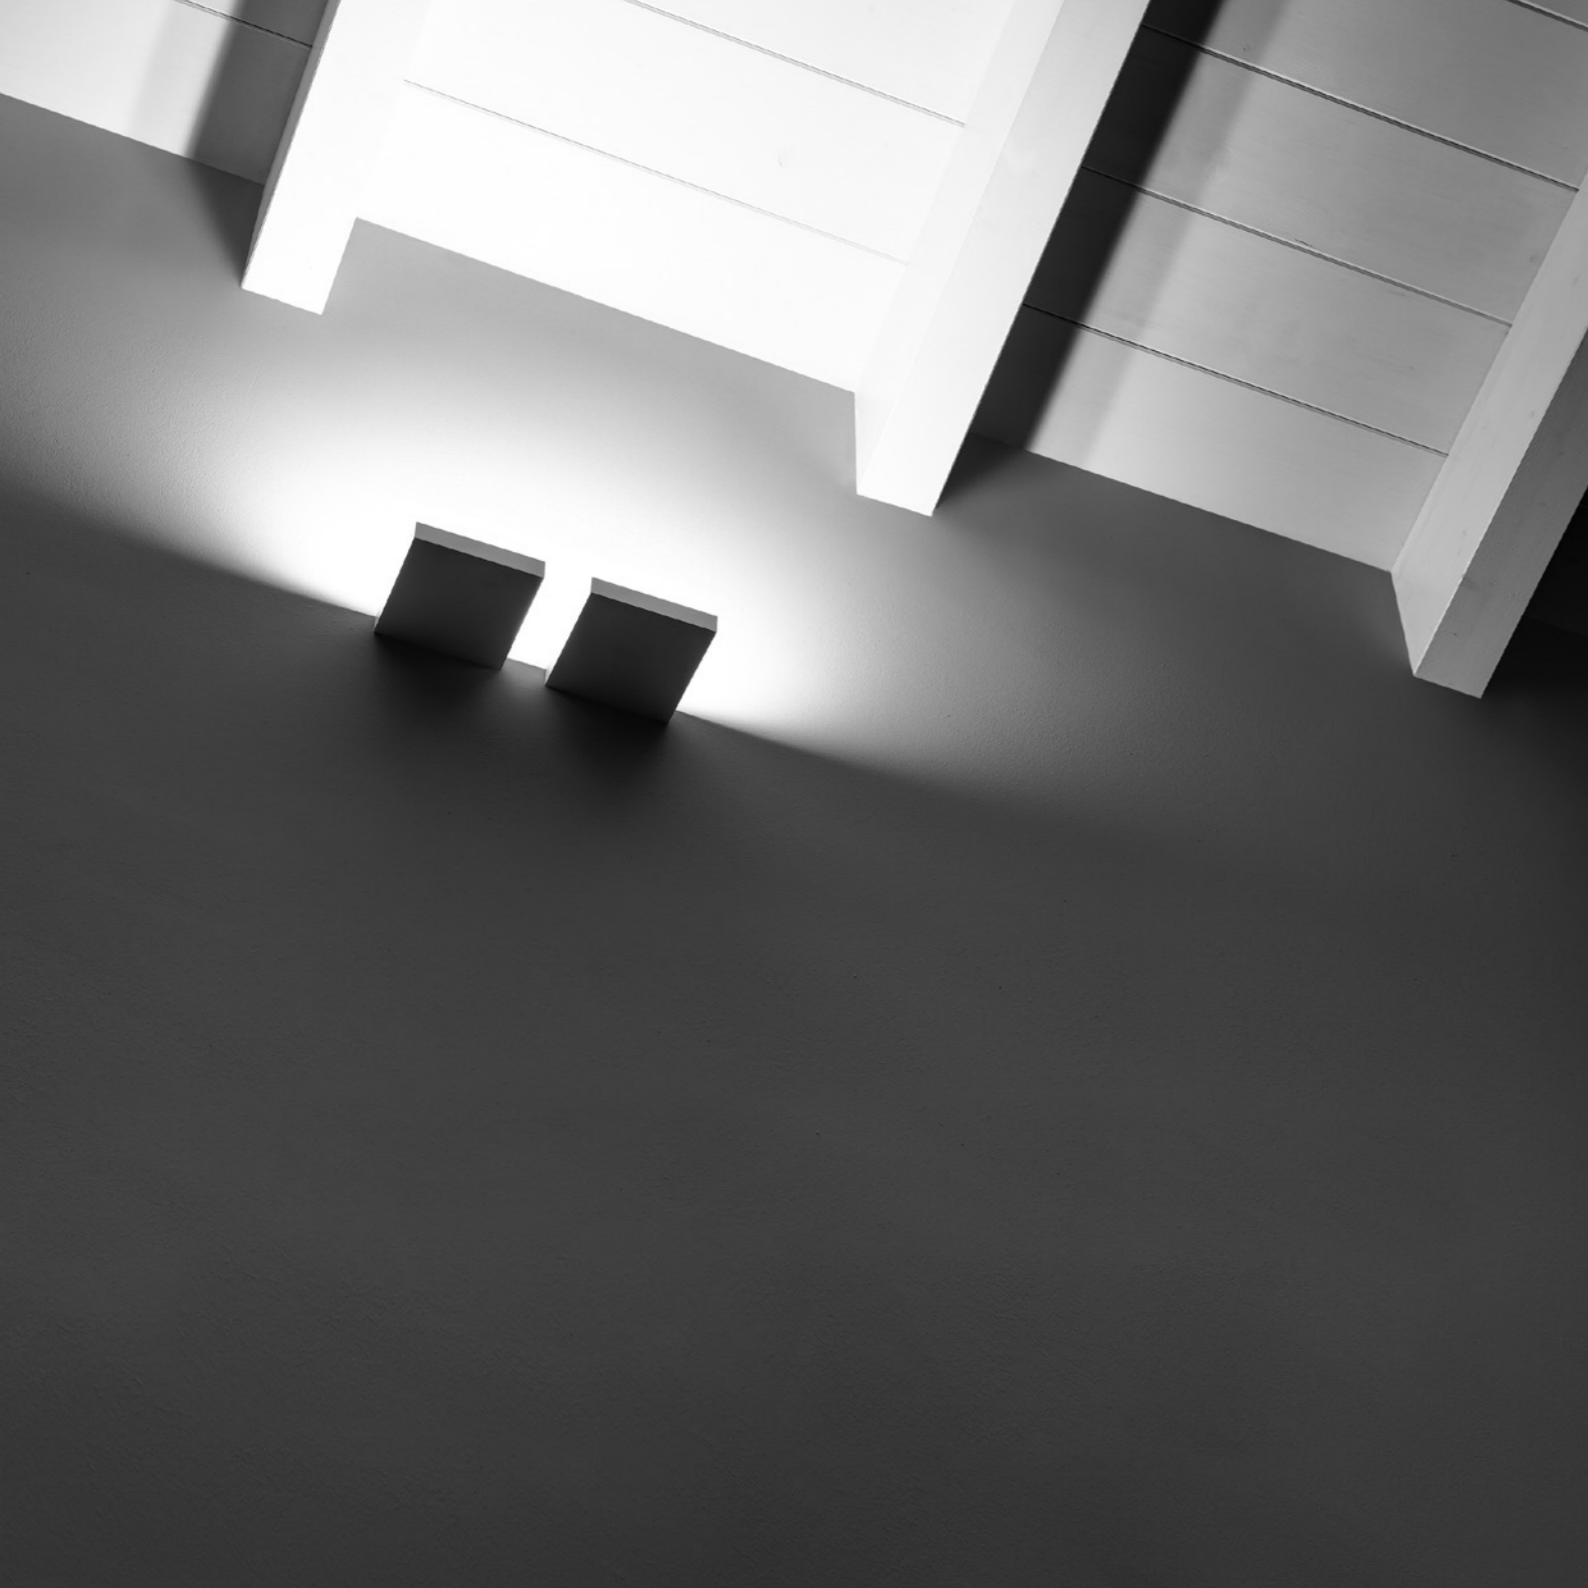

SOL 1

Omar Carraglia - Davide Groppi / 2003

A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.


SOL 1

Omar Carraglia - Davide Groppi / 2003

Wall / Indirect / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Wall luminaire.



SOL 1

12,5W
220-230V - 50/60Hz
2700K - 836lm / 3000K - 899lm
CRI >90
TRIAC/IGBT
CE IP20

Matt White - 2700K - TRIAC/IGBT
Matt White - 3000K - TRIAC/IGBT
Matt Black - 2700K - TRIAC/IGBT
Matt Black - 3000K - TRIAC/IGBT

1A3130300.27.02
1A3130300.30.02
1A3130400.27.02
1A3130400.30.02





A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.


SOL 2

/ 2008

Wall / Indirect / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Wall luminaire.



SOL 2

24,5W
220-230V - 50/60Hz
2700K - 1681lm / 3000K - 1808lm
CRI >90
TRIAC/IGBT
CE IP20

Matt White - 2700K - TRIAC/IGBT
Matt White - 3000K - TRIAC/IGBT
Matt Black - 2700K - TRIAC/IGBT
Matt Black - 3000K - TRIAC/IGBT

1A3140300.27.02
1A3140300.30.02
1A3140400.27.02
1A3140400.30.02






A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.
Luminaire available also in ENDLESS version.

Wall-Ceiling / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Wall luminaire. Adjustable in all directions. SPOT ENDLESS and SPOT ENDLESS CASAMBI: luminaires dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). They can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.




SPOT

Max 21W
 220-240V - 50/60Hz
 CRI >90
 Driver integrated
 DALI
 LED module not included
 CE IP20

Matt White - DALI
 Matt Black - DALI

1A1080300.00.01
 1A1080400.00.01




SPOT

Max 21W
 220-240V - 50/60Hz
 CRI >90
 Driver integrated
 PUSH
 LED module not included
 CE IP20

Matt White - PUSH
 Matt Black - PUSH

1A1080300.00.04
 1A1080400.00.04




SPOT ENDLESS

ENDLESS version only
 Max 13W - 0,34A
 48V DC
 CRI >90
 Driver not included
 See page ENDLESS
 LED module not included
 CE IP20 E

Matt White
 Matt Black

1A1080300.00.40
 1A1080400.00.40



SPOT ENDLESS CASAMBI


ENDLESS version only
 Max 15,5W - 0,4A
 48V DC
 CRI >90
 Driver not included
 See page ENDLESS
 LED module not included
 CE IP20 E A

Matt White
 Matt Black


1A1080300.00.41
 1A1080400.00.41

Compulsory accessories


LED modules




DG111 LED module			Not included
16,7W - 15° - 500mA DC	SPOT	1A4700000.27.20	
2700K - 1648lm - CRI >90			
Energy Efficiency F - Dimmable			
16,7W - 15° - 500mA DC		1A4700000.30.20	
3000K - 1682lm - CRI >90			
Energy Efficiency F - Dimmable			




DG111 LED module			Not included
16,7W - 22° - 500mA DC	SPOT	1A3890000.27.20	
2700K - 1859lm - CRI >90			
Energy Efficiency F - Dimmable			
16,7W - 22° - 500mA DC		1A3890000.30.20	
3000K - 1945lm - CRI >90			
Energy Efficiency F - Dimmable			




DG111 LED module			Not included
16,7W - 36° - 500mA DC	SPOT	1A3900000.27.20	
2700K - 1808lm - CRI >90			
Energy Efficiency F - Dimmable			
16,7W - 36° - 500mA DC		1A3900000.30.20	
3000K - 1890lm - CRI >90			
Energy Efficiency F - Dimmable			



DG111 LED module			Not included
16,7W - 15° - 350mA DC	SPOT ENDLESS /	1A4700000.27.20	
2700K - 1336lm - CRI >90	SPOT ENDLESS CASAMBI		
Energy Efficiency F - Dimmable			
16,7W - 15° - 350mA DC		1A4700000.30.20	
3000K - 1364lm - CRI >90			
Energy Efficiency F - Dimmable			




DG111 LED module			Not included
16,7W - 22° - 350mA DC	SPOT ENDLESS /	1A3890000.27.20	
2700K - 1266lm - CRI >90	SPOT ENDLESS CASAMBI		
Energy Efficiency F - Dimmable			
16,7W - 22° - 350mA DC		1A3890000.30.20	
3000K - 1323lm - CRI >90			
Energy Efficiency F - Dimmable			




DG111 LED module			Not included
16,7W - 36° - 350mA DC	SPOT ENDLESS /	1A3900000.27.20	
2700K - 1508lm - CRI >90	SPOT ENDLESS CASAMBI		
Energy Efficiency F - Dimmable			
16,7W - 36° - 350mA DC		1A3900000.30.20	
3000K - 1578lm - CRI >90			
Energy Efficiency F - Dimmable			

Optional accessories


Other accessories




Accessory holder + Soft filter + Honeycomb louvre			Not included
Matt Black		1X0070400.04.00	



Accessory holder + Elliptical filter			Not included
Matt Black		1X0070400.05.00	




Blue filter			Not included
Standard	Compulsory with	1X0070000.06.00	
	1X0070400.04.00 / 1X0070400.05.00		




Red filter			Not included
Standard	Compulsory with	1X0070000.07.00	
	1X0070400.04.00 / 1X0070400.05.00		




Yellow filter			Not included
Standard	Compulsory with	1X0070000.08.00	
	1X0070400.04.00 / 1X0070400.05.00		



Horizontal directional fins			Not included
Matt Black		1X0070400.01.00	



Cylindrical screen			Not included
Matt Black		1X0070400.02.00	



Cone 45°			Not included
Matt Black		1X0070400.03.00	



TOAST

Daide Groppi - Alberto Zattin / 2001




The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

TOAST

Davide Groppi - Alberto Zattin / 2001

Wall / Diffuse / Indoor

Material	Glass - Metal			
Finish	.01 Polished Chrome	.03 Matt White	.04 Matt Black	.08 Brushed Brass
	.14 Brushed Chrome			
Note	Wall luminaire. Dual emission.			




TOAST

Max 100W - R7s
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20 \varnothing 0,5 m

Polished Chrome - ON/OFF
Matt White - ON/OFF
Matt Black - ON/OFF
Brushed Brass - ON/OFF
Brushed Chrome - ON/OFF

1A3290100.00.00
1A3290300.00.00
1A3290400.00.00
1A3290800.00.00
1A3291400.00.00



TOAST LED

12W
100-240V - 50/60Hz
2700K - 743lm / 3000K - 743lm
CRI >90
Driver integrated
ON/OFF
CE IP20

Polished Chrome - 2700K - ON/OFF
Polished Chrome - 3000K - ON/OFF
Matt White - 2700K - ON/OFF
Matt White - 3000K - ON/OFF
Matt Black - 2700K - ON/OFF
Matt Black - 3000K - ON/OFF
Brushed Brass - 2700K - ON/OFF
Brushed Brass - 3000K - ON/OFF
Brushed Chrome - 2700K - ON/OFF
Brushed Chrome - 3000K - ON/OFF

1A3280100.27.00
1A3280100.30.00
1A3280300.27.00
1A3280300.30.00
1A3280400.27.00
1A3280400.30.00
1A3280800.27.00
1A3280800.30.00
1A3281400.27.00
1A3281400.30.00

Optional accessories

Bulbs



LED - R7s COB - 78 mm

220-240V - 4W - 330°
3000K - 450lm - CRI >80
Energy Efficiency E

1Y0000138

Not included



CEILING



ASINTOTO


Daide Groppi / 2023

Abstraction, purity, graphic sign.
The projected reduction of Infinito.
The disc appears enigmatic, the symbolic presence of the absence of light.

Ceiling / Indirect / Indoor

Material Metal - Methacrylate
Finish .27 Gravity Black

Note Ceiling luminaire. Disc with gravity black finish. Magnetic weight available for disc tilting. Black cable.



ASINTOTO


18W
 Max 500mA DC
 2700K - 1435lm / 3000K - 1478lm
 CRI >90
 Driver not included
 CE IP20

Gravity Black - 2700K
 Gravity Black - 3000K


1A4072700.27.20
 1A4072700.30.20

Compulsory accessories


Drivers



Driver			Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/DALI	1Z0241180.500	




Driver			Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH - 1-10V	1Z0240870.500	



Driver			Not included
220-240V	500mA/20W/IP20/TRIAC/IGBT	1Z0240850.500	

Optional accessories

Installation kits



Circular plasterboard panel 12,5 mm		Not included
Standard	Cut-out 400x400 mm Minimum space for mounting Ø 115 mm	1A4520000.00.00

Suspension kits



Recessed suspension kit for 12,5 mm plasterboard		Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.04.00



Ceiling suspension kit		Not included
Matt White	For electrical cables - 1 Piece	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00





Wall adapter plate		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

Other accessories



Magnetic weight		Not included
Matt Black	For sloped installation	1A4710400.00.00

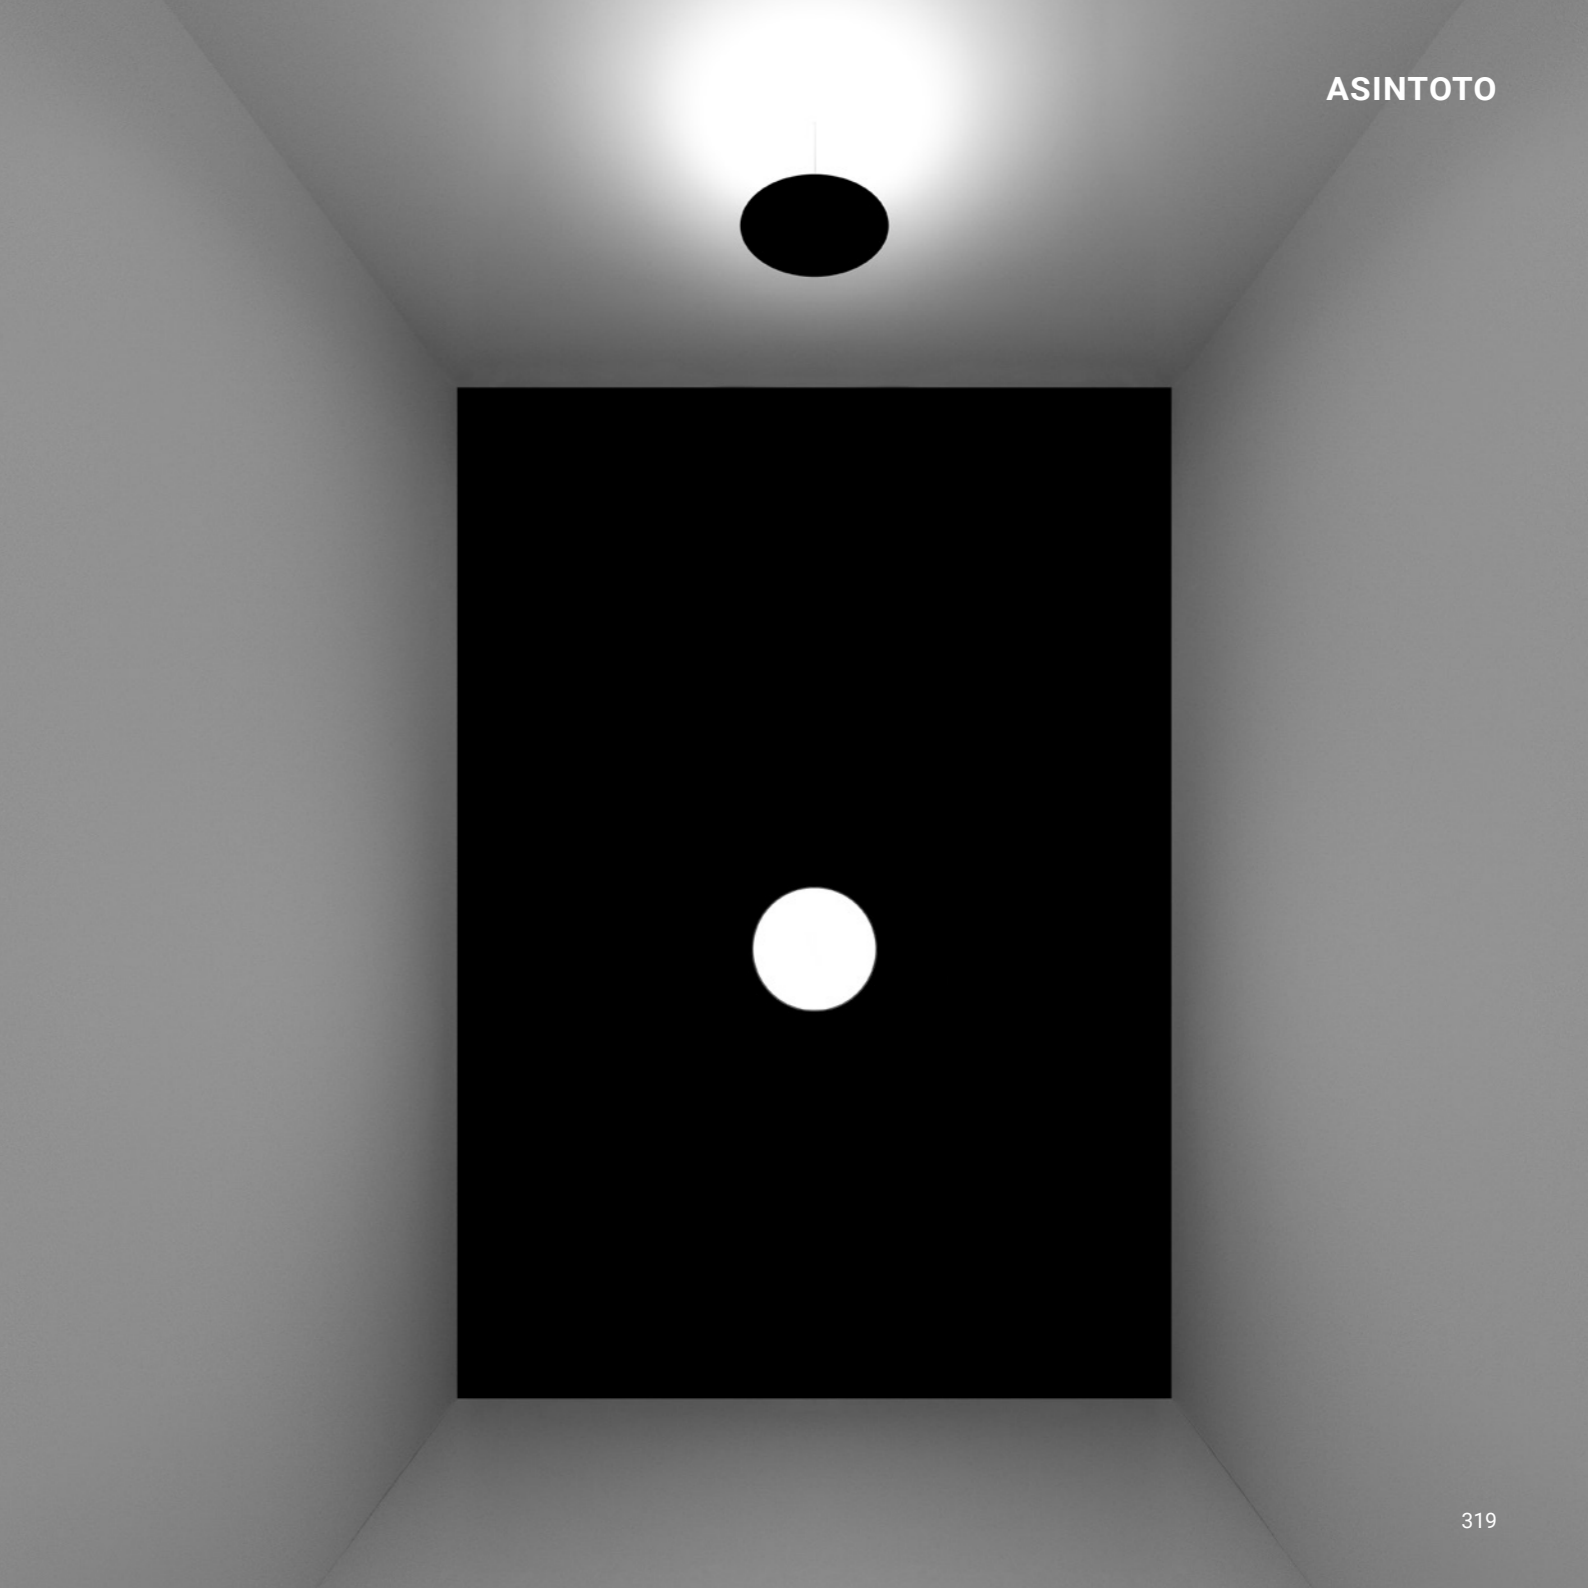



A white disc, the perfect representation of diffused light.
It can be mounted on the wall or ceiling, with modular brightness.

AURORA


Davide Groppi / 2023

Ceiling-Wall / Diffuse / Indoor

Material Metal - PMMA

Finish .03 Matt White .04 Matt Black .32 Copper Oxide

Note Wall and ceiling luminaire. Matt white diffuser.



AURORA

28W

110-240V - 50/60Hz

3000K - 2700lm

CRI >80

Driver integrated

DALI - PUSH - 1-10V

CE IP20

Matt White - 3000K - DALI - PUSH - 1-10V

1A4010300.30.07

Matt Black - 3000K - DALI - PUSH - 1-10V

1A4010400.30.07

Copper Oxide - 3000K - DALI - PUSH - 1-10V

1A4013200.30.07

DOT PL 51

Omar Carraglia - Davide Groppi / 2015



A tool to light.

A luminaire designed for use with state-of-the-art LED bulbs to offer superior performance and a wide range of light beams.


DOT PL 51

Omar Carraglia - Davide Groppi / 2015

Ceiling / Direct / Indoor

Material Metal
Finish .03 Matt White

Note Ceiling luminaire.



DOT PL 51

Max 10W - GU10
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
 CE IP20

Matt White - ON/OFF

1A3800300.00.00

DOT PL 51

Omar Carraglia - Davide Groppi / 2015

Optional accessories

Bulbs



LED - GU10 - PAR16

220-240V - 5,5W - 25°
 3000K - 375lm - CRI >97
 Energy Efficiency G - Dimmable

1Y0330500

Not included



LED SORAA - GU10 - MR16

230V - 7,5W - 10°
 2700K - 390lm - CRI >95
 Energy Efficiency G - Dimmable

1Y1580210

Not included




LED SORAA - GU10 - MR16

230V - 7,5W - 10°
 3000K - 410lm - CRI >95
 Energy Efficiency G - Dimmable

1Y1580010

Not included

Other accessories




Darklight

LED SORAA - GU10 - MR16

1Y1580040

Not included




25° beam filter

LED SORAA - GU10 - MR16

1Y1580020

Not included



36° beam filter

LED SORAA - GU10 - MR16

1Y1580030

Not included

HAKO PL

Alberto Zattin / 2000



A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.


HAKO PL

Alberto Zattin / 2000

Ceiling / Diffuse / Indoor

Material Glass - Metal - Methacrylate
Finish .03 Matt White

Note Ceiling luminaire. Sanded glass diffuser.




HAKO PL

Max 60W - R7s
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
 C E IP20 \varnothing 0,5 m

Matt White - ON/OFF

| 1A3460300.00.00 |



HAKO PL LED

12,5W
 220-230V - 50/60Hz
 2700K - 593lm / 3000K - 638lm
 CRI >90
 TRIAC/IGBT
 C E IP20

Matt White - 2700K - TRIAC/IGBT
 Matt White - 3000K - TRIAC/IGBT

| 1A3160300.27.02 |
 | 1A3160300.30.02 |

Optional accessories

Bulbs




LED - R7s COB - 78 mm

Not included

220-240V - 4W - 330°
 3000K - 450lm - CRI >80
 Energy Efficiency E

1Y0000138



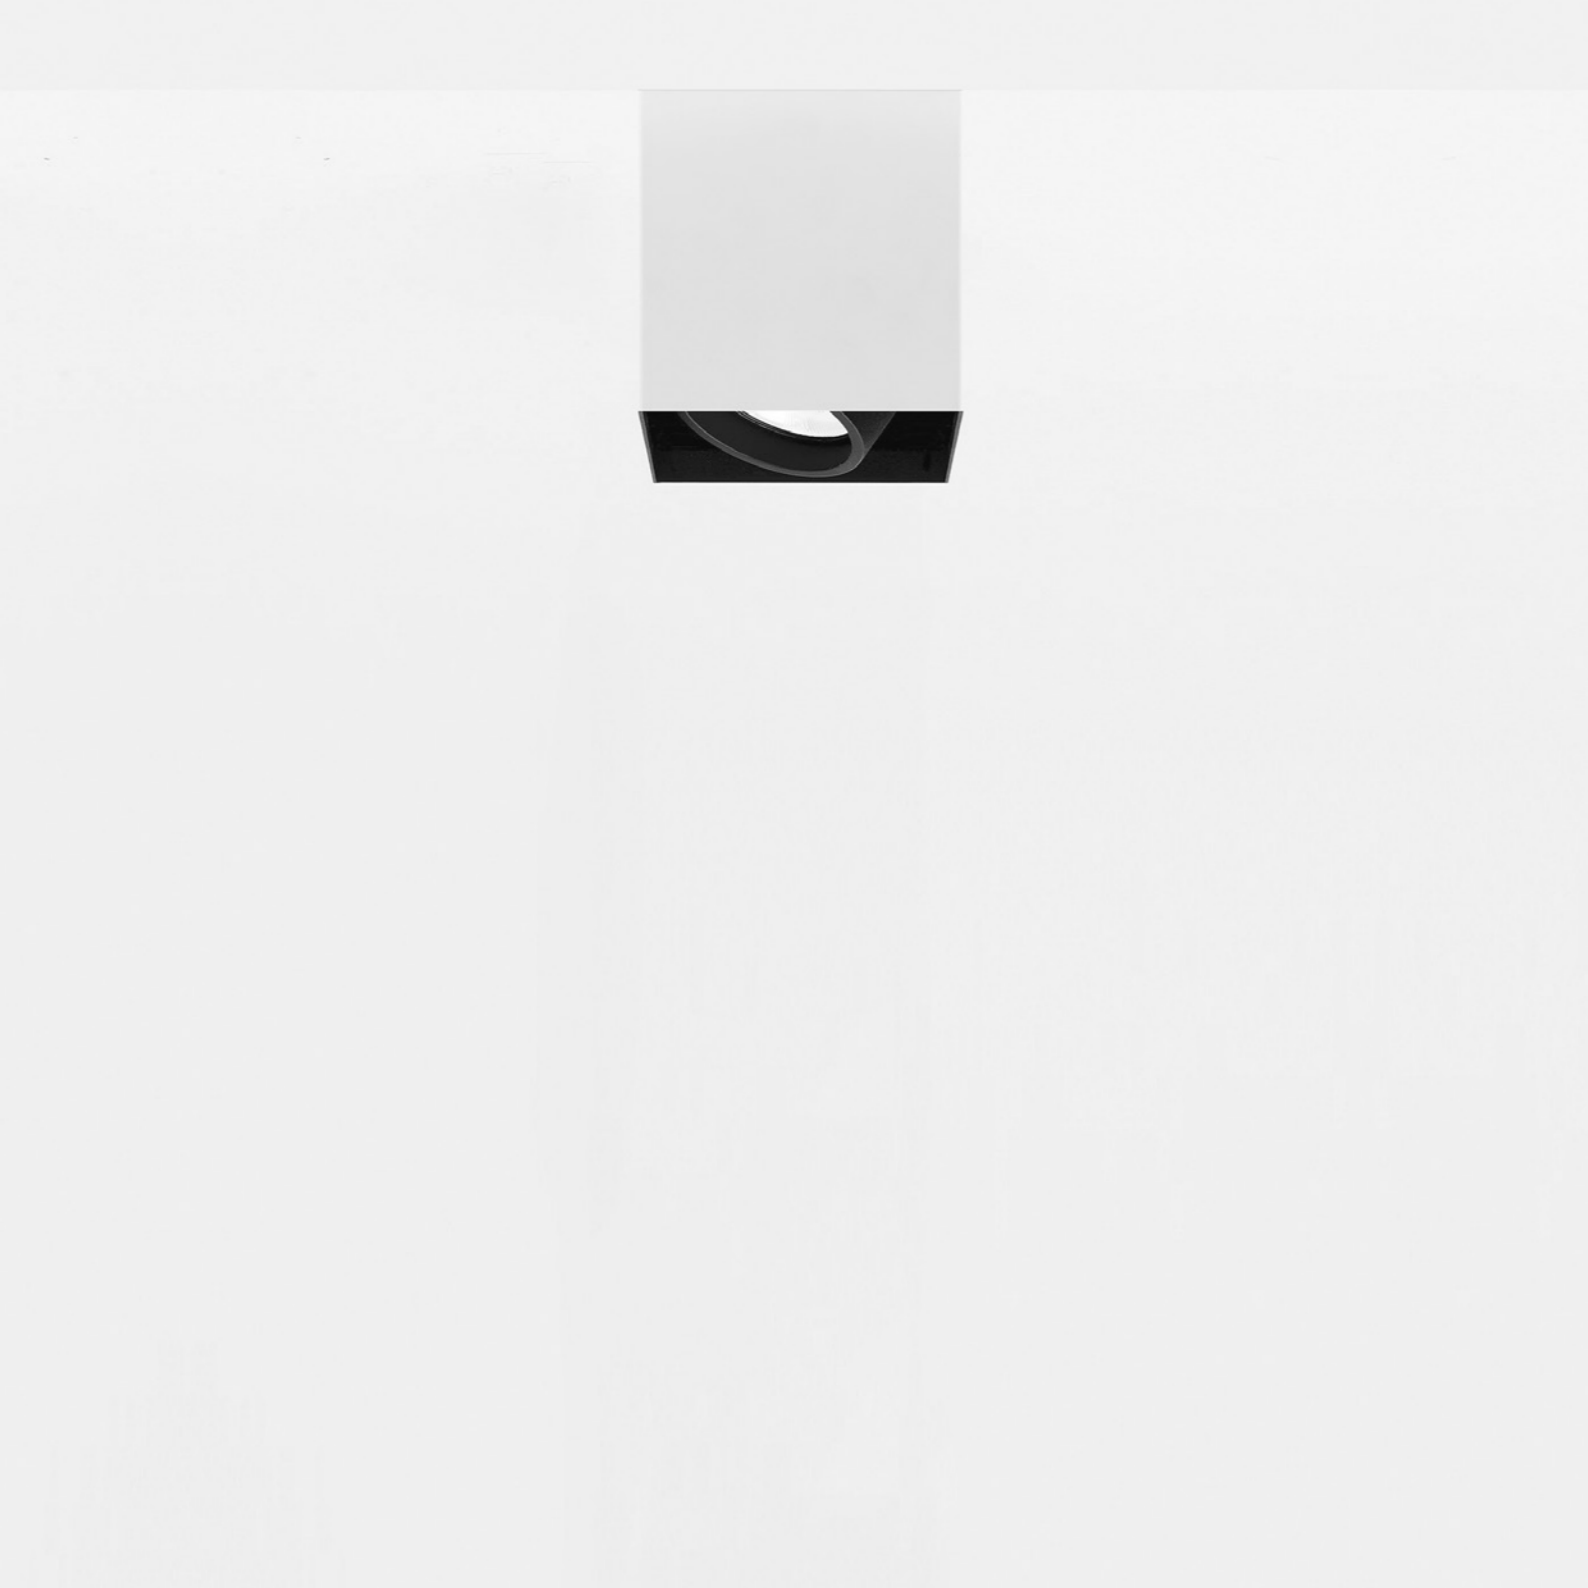

The luminaire is pure form, a simple container for the light source. Light is incorporated into the space, becoming an architectural element.


MINI PL 51

/ 2016

Ceiling / Direct / Indoor

Material Metal
Finish .03 Matt White .34 Matt White/Black Bicolor

Note Ceiling luminaire. Adjustable in all directions.



MINI PL 51

Max 10W - GU10
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
 CE IP20

Matt White - ON/OFF
 Matt White/Black Bicolor - ON/OFF

1A3450300.00.00
 1A3453400.00.00

MINI PL 51

/ 2016

Optional accessories

Bulbs



LED - GU10 - PAR16	Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500




LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210




LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010


Other accessories



Darklight	Not included
LED SORAA - GU10 - MR16	1Y1580040




25° beam filter	Not included
LED SORAA - GU10 - MR16	1Y1580020



36° beam filter	Not included
LED SORAA - GU10 - MR16	1Y1580030

NULLA PL

Daide Groppi / 2014

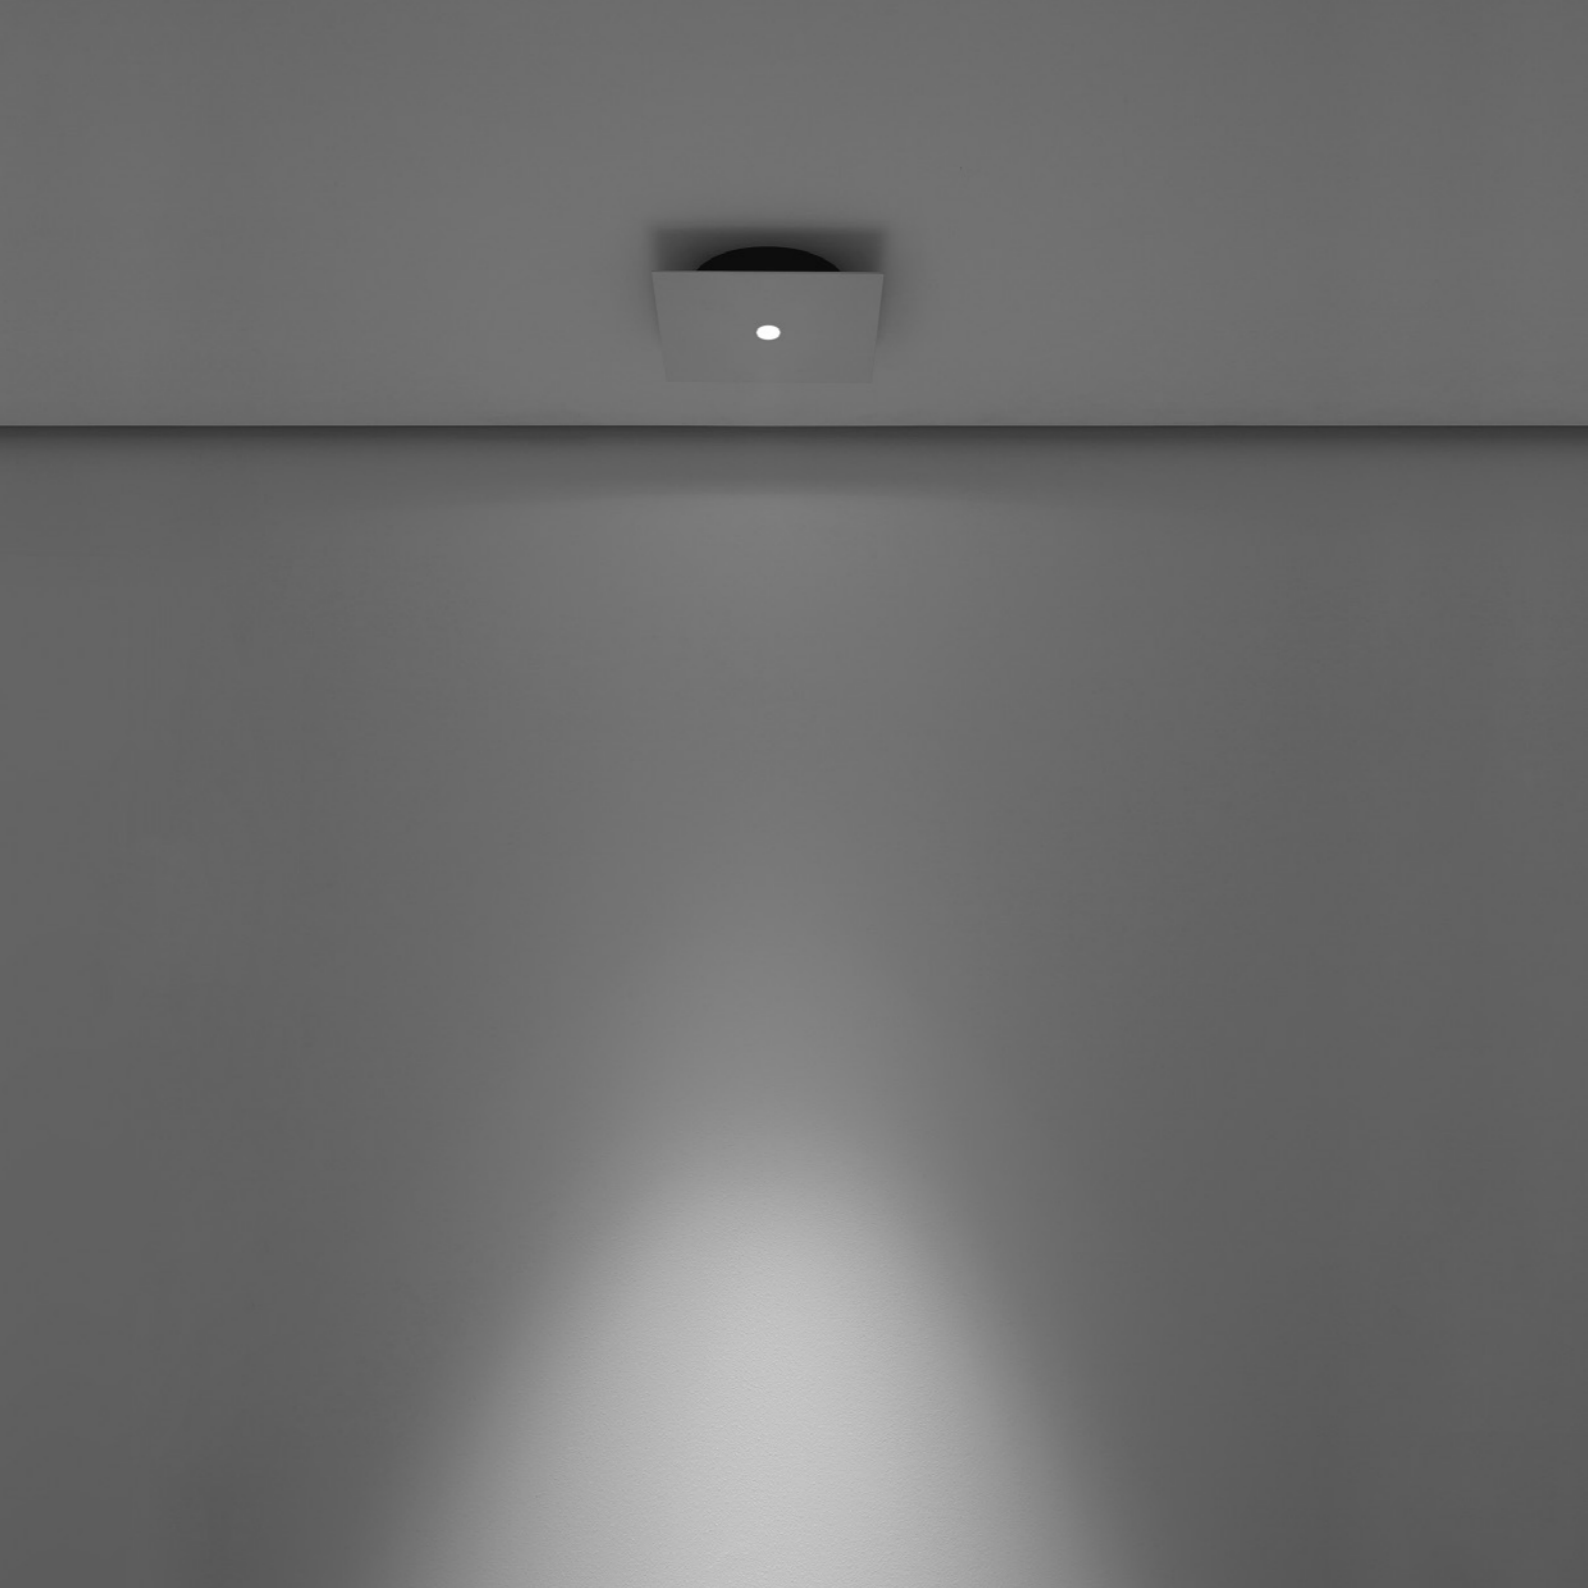

The marvellous Nulla project, also available in a surface mounted version.


NULLA PL

Davide Groppi / 2014

Ceiling / Direct / Indoor

Material Metal
Finish .03 Matt White

Note Ceiling luminaire. Visible 18 mm diameter hole.



NULLA PL

8,5W
100-240V - 50/60Hz
2700K - 460lm / 3000K - 495lm
CRI >90
Driver integrated
ON/OFF
CE IP20

Matt White - 2700K - ON/OFF
Matt White - 3000K - ON/OFF

1A2500300.27.00
1A2500300.30.00






A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Ceiling / Direct / Indoor

Material Metal
Finish .03 Matt White .34 Matt White/Black Bicolor

Note Ceiling luminaire. Adjustable in all directions.



PUNTO PL

Max 21W
 100-240V - 50/60Hz
 CRI >90
 Driver integrated
 PUSH
 LED module not included




Matt White - PUSH
 Matt White/Black Bicolor - PUSH


1A1110300.00.04
 1A1113400.00.04

Compulsory accessories


LED modules



DG111 LED module	Not included
16,7W - 15° - 500mA DC 2700K - 1648lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.27.20
16,7W - 15° - 500mA DC 3000K - 1682lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.30.20



DG111 LED module	Not included
16,7W - 22° - 500mA DC 2700K - 1859lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.27.20
16,7W - 22° - 500mA DC 3000K - 1945lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.30.20




DG111 LED module	Not included
16,7W - 36° - 500mA DC 2700K - 1808lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.27.20
16,7W - 36° - 500mA DC 3000K - 1890lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.30.20

Optional accessories

Other accessories




Accessory holder + Soft filter + Honeycomb louvre	Not included
Matt Black	1X0070400.04.00




Accessory holder + Elliptical filter	Not included
Matt Black	1X0070400.05.00



Blue filter	Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00
	1X0070000.06.00



Red filter	Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00
	1X0070000.07.00



Yellow filter	Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00
	1X0070000.08.00




A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Ceiling / Direct / Indoor

Material Metal
Finish .03 Matt White .34 Matt White/Black Bicolor

Note Ceiling luminaire. Adjustable in all directions.




PUNTO 2 PL
 Max 2x21W
 100-240V - 50/60Hz
 CRI >90
 Driver integrated
 PUSH
 LED modules not included
 CE IP20

Matt White - PUSH
 Matt White/Black Bicolor - PUSH


1A1120300.00.04
 1A1123400.00.04

Compulsory accessories


LED modules



DG111 LED module	Not included
16,7W - 15° - 500mA DC 2700K - 1648lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.27.20
16,7W - 15° - 500mA DC 3000K - 1682lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.30.20



DG111 LED module	Not included
16,7W - 22° - 500mA DC 2700K - 1859lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.27.20
16,7W - 22° - 500mA DC 3000K - 1945lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.30.20




DG111 LED module	Not included
16,7W - 36° - 500mA DC 2700K - 1808lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.27.20
16,7W - 36° - 500mA DC 3000K - 1890lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.30.20

Optional accessories


Other accessories




Accessory holder + Soft filter + Honeycomb louvre	Not included
Matt Black	1X0070400.04.00




Accessory holder + Elliptical filter	Not included
Matt Black	1X0070400.05.00



Blue filter	Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00
	1X0070000.06.00



Red filter	Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00
	1X0070000.07.00



Yellow filter	Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00
	1X0070000.08.00

SANMARTINO

Omar Carraglia - Davide Groppi / 2014



Where did the chandelier go?
A work about absence. About something missing.
As if by removing the chandelier, its memory stays,
but with a modern and sensual light.

SANMARTINO

Omar Carraglia - Davide Groppi / 2014

Ceiling / Direct / Indoor

Material Metal
Finish .03 Matt White .15 Natural Brass

Note Ceiling luminaire. Visible 18 mm diameter hole.




SANMARTINO

8,5W
100-240V - 50/60Hz
3000K - 375lm
CRI >90
Driver integrated
ON/OFF
CE IP20

Matt White - 3000K - ON/OFF
Natural Brass - 3000K - ON/OFF

1A3420300.30.00
1A3421500.30.00

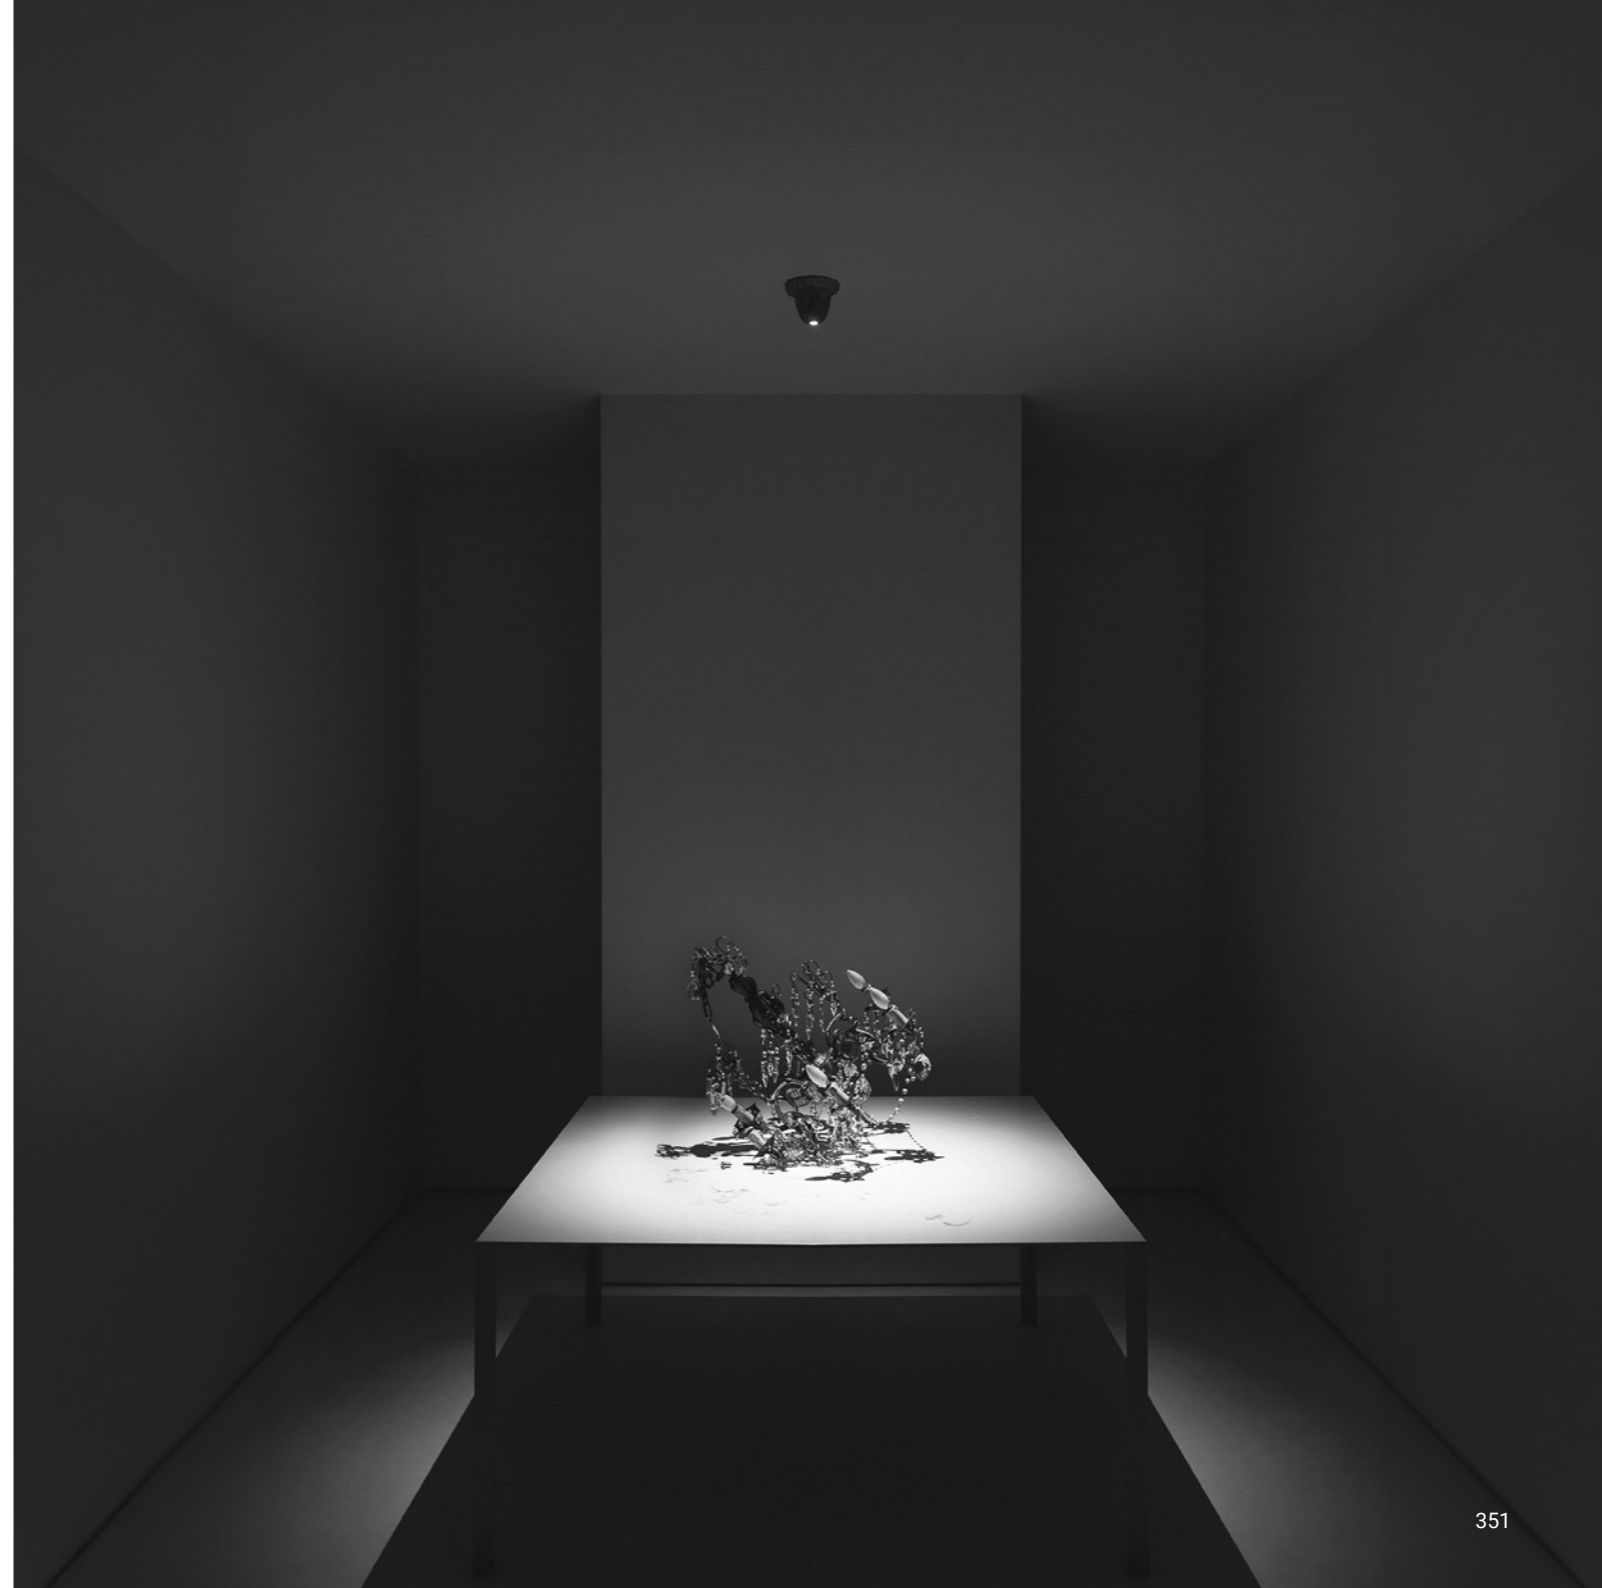



A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.


SPY PL

/ 2022

Ceiling / Direct / Indoor

Material Metal - Polycarbonate
Finish .03 Matt White

Note Ceiling luminaire.




SPY PL

39W
110-240V - 50/60Hz
3000K - 4292lm
CRI >80
UGR <19
Driver integrated
DALI
CE IP20

Matt White - 3000K - DALI

| 1A2930300.30.01 |



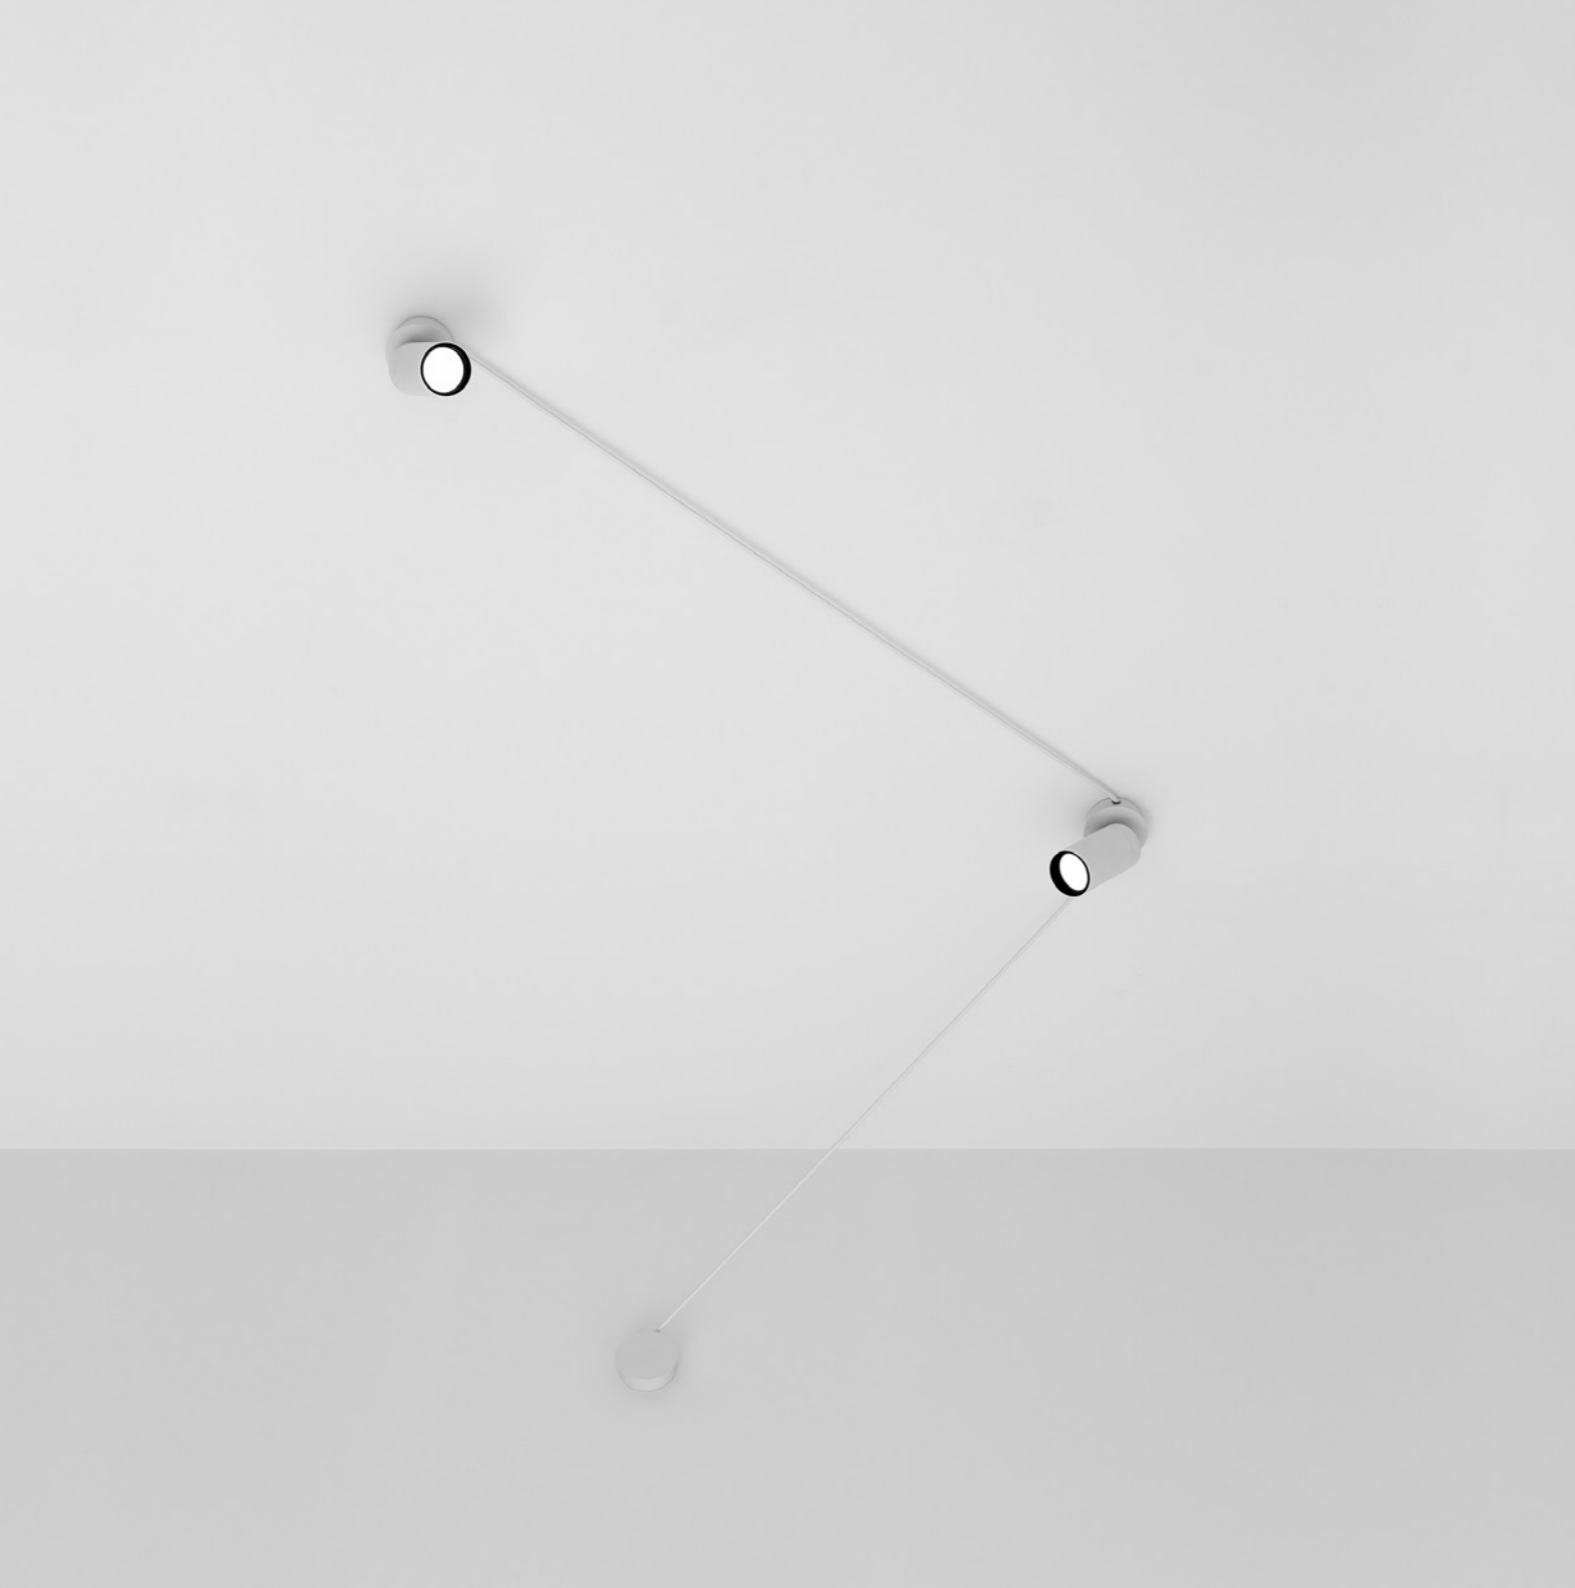


A simple, graphic solution.
Bringing accent lighting with an external wiring system.

Wall-Ceiling / Direct / Indoor

Material	Metal
Finish	.03 Matt White .04 Matt Black

Note Ceiling luminaire. Adjustable in all directions. White cable (2 m) for the matt white finish. Black cable (2 m) for the matt black finish. Connects max 20 lamps.



TRICK TRACK

Max 10W - GU10
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
 CE IP20

Matt White - ON/OFF
 Matt Black - ON/OFF

1A3430300.00.00
 1A3430400.00.00

Optional accessories

Installation kits



Wall and ceiling rose	Not included
Matt White	1A3440300.00.00
Matt Black	1A3440400.00.00

Bulbs



LED - GU10 - PAR16	Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500




LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210




LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010


Other accessories



Darklight	Not included
LED SORAA - GU10 - MR16	1Y1580040



25° beam filter	Not included
LED SORAA - GU10 - MR16	1Y1580020



36° beam filter	Not included
LED SORAA - GU10 - MR16	1Y1580030

RECESSED

DOT R

Omar Carraglia - Davide Groppi / 2015




A tool to light.

A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.

Recessed / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Recessed luminaire. Adjustable in all directions. Plasterboard hole: 40x40 mm. Minimum space for recessed installation: 85 mm.




DOT R

13W
 Max 350mA DC
 2700K / 3000K
 CRI >97
 Driver not included
 CE IP20

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K

1A4770300.27.20
 1A4770300.30.20
 1A4770400.27.20
 1A4770400.30.20



DOT R 51


Max 10W - GU10
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
 CE IP20

Matt Black - ON/OFF
 Matt White - ON/OFF


1A3700400.00.00
 1A3700300.00.00

Compulsory accessories


Drivers



Driver			Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	DOT R	1Z0241180.350



Driver			Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	DOT R	1Z0240870.350



Driver			Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	DOT R	1Z0240850.350


Other accessories



Lens			Not included
Beam - 14°	2700K - CRI >97 - 983lm	DOT R	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
Beam - 24°	2700K - CRI >97 - 943lm	DOT R	1A3100000.00.00
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 955lm	DOT R	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
Beam - 50°	2700K - CRI >97 - 965lm	DOT R	1A3120000.00.00
	3000K - CRI >97 - 1016lm		

Optional accessories

Other accessories




Accessory holder + Honeycomb louvre		Not included	
	DOT R	1X0080400.01.00	



Elliptical filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.02.00



Blue filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.03.00



Red filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.04.00



Yellow filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.05.00

Optional accessories

Bulbs



LED - GU10 - PAR16		Not included	
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT R 51	1Y0330500




LED SORAA - GU10 - MR16		Not included	
	230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT R 51	1Y1580210




LED SORAA - GU10 - MR16		Not included	
	230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT R 51	1Y1580010


Other accessories



Darklight		Not included	
	LED SORAA - GU10 - MR16	DOT R 51	1Y1580040



25° beam filter		Not included	
	LED SORAA - GU10 - MR16	DOT R 51	1Y1580020



36° beam filter		Not included	
	LED SORAA - GU10 - MR16	DOT R 51	1Y1580030



A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

MINI 51

/ 2016

Recessed / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Recessed luminaire. Adjustable in all directions. Plasterboard hole: 104x104 mm. Minimum space for recessed installation: 130 mm.



MINI 51

Max 10W - GU10
 100-240V - 50/60Hz
 ON/OFF

Bulb not included



Matt White - ON/OFF
 Matt Black - ON/OFF

1A0660300.00.00
 1A0660400.00.00

MINI 51

/ 2016

Compulsory accessories

Installation kits



Plasterboard frame 12,5 mm		Not included
Matt White	Cut-out 104x104 mm Minimum space for mounting 130 mm	1A3500300.00.00
Matt Black	Cut-out 104x104 mm Minimum space for mounting 130 mm	1A3500400.00.00

Optional accessories

Bulbs



LED - GU10 - PAR16	Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500




LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210




LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010


Other accessories



Darklight	Not included
LED SORAA - GU10 - MR16	1Y1580040



25° beam filter	Not included
LED SORAA - GU10 - MR16	1Y1580020



36° beam filter	Not included
LED SORAA - GU10 - MR16	1Y1580030



A tool to light.
The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

MINI BIT 51

/ 2016

Recessed / Direct / Indoor

Material Metal
Finish .03 Matt White .34 Matt White/Black Bicolor

Note Recessed luminaire. Adjustable in all directions. Plasterboard hole: 104x104 mm. Minimum space for recessed installation: 130 mm.



MINI BIT 51

Max 10W - GU10
 100-240V - 50/60Hz
 ON/OFF

Bulb not included



Matt White - ON/OFF

Matt White/Black Bicolor - ON/OFF

1A0670300.00.00

1A0673400.00.00

MINI BIT 51

/ 2016

Optional accessories

Bulbs



LED - GU10 - PAR16

220-240V - 5,5W - 25°
 3000K - 375lm - CRI >97
 Energy Efficiency G - Dimmable

1Y0330500

Not included



LED SORAA - GU10 - MR16

230V - 7,5W - 10°
 2700K - 390lm - CRI >95
 Energy Efficiency G - Dimmable

1Y1580210

Not included




LED SORAA - GU10 - MR16

230V - 7,5W - 10°
 3000K - 410lm - CRI >95
 Energy Efficiency G - Dimmable

1Y1580010

Not included

Other accessories




Darklight

LED SORAA - GU10 - MR16

1Y1580040

Not included




25° beam filter

LED SORAA - GU10 - MR16

1Y1580020

Not included



36° beam filter


LED SORAA - GU10 - MR16

1Y1580030

Not included

MIRA R

Omar Carraglia / 2015

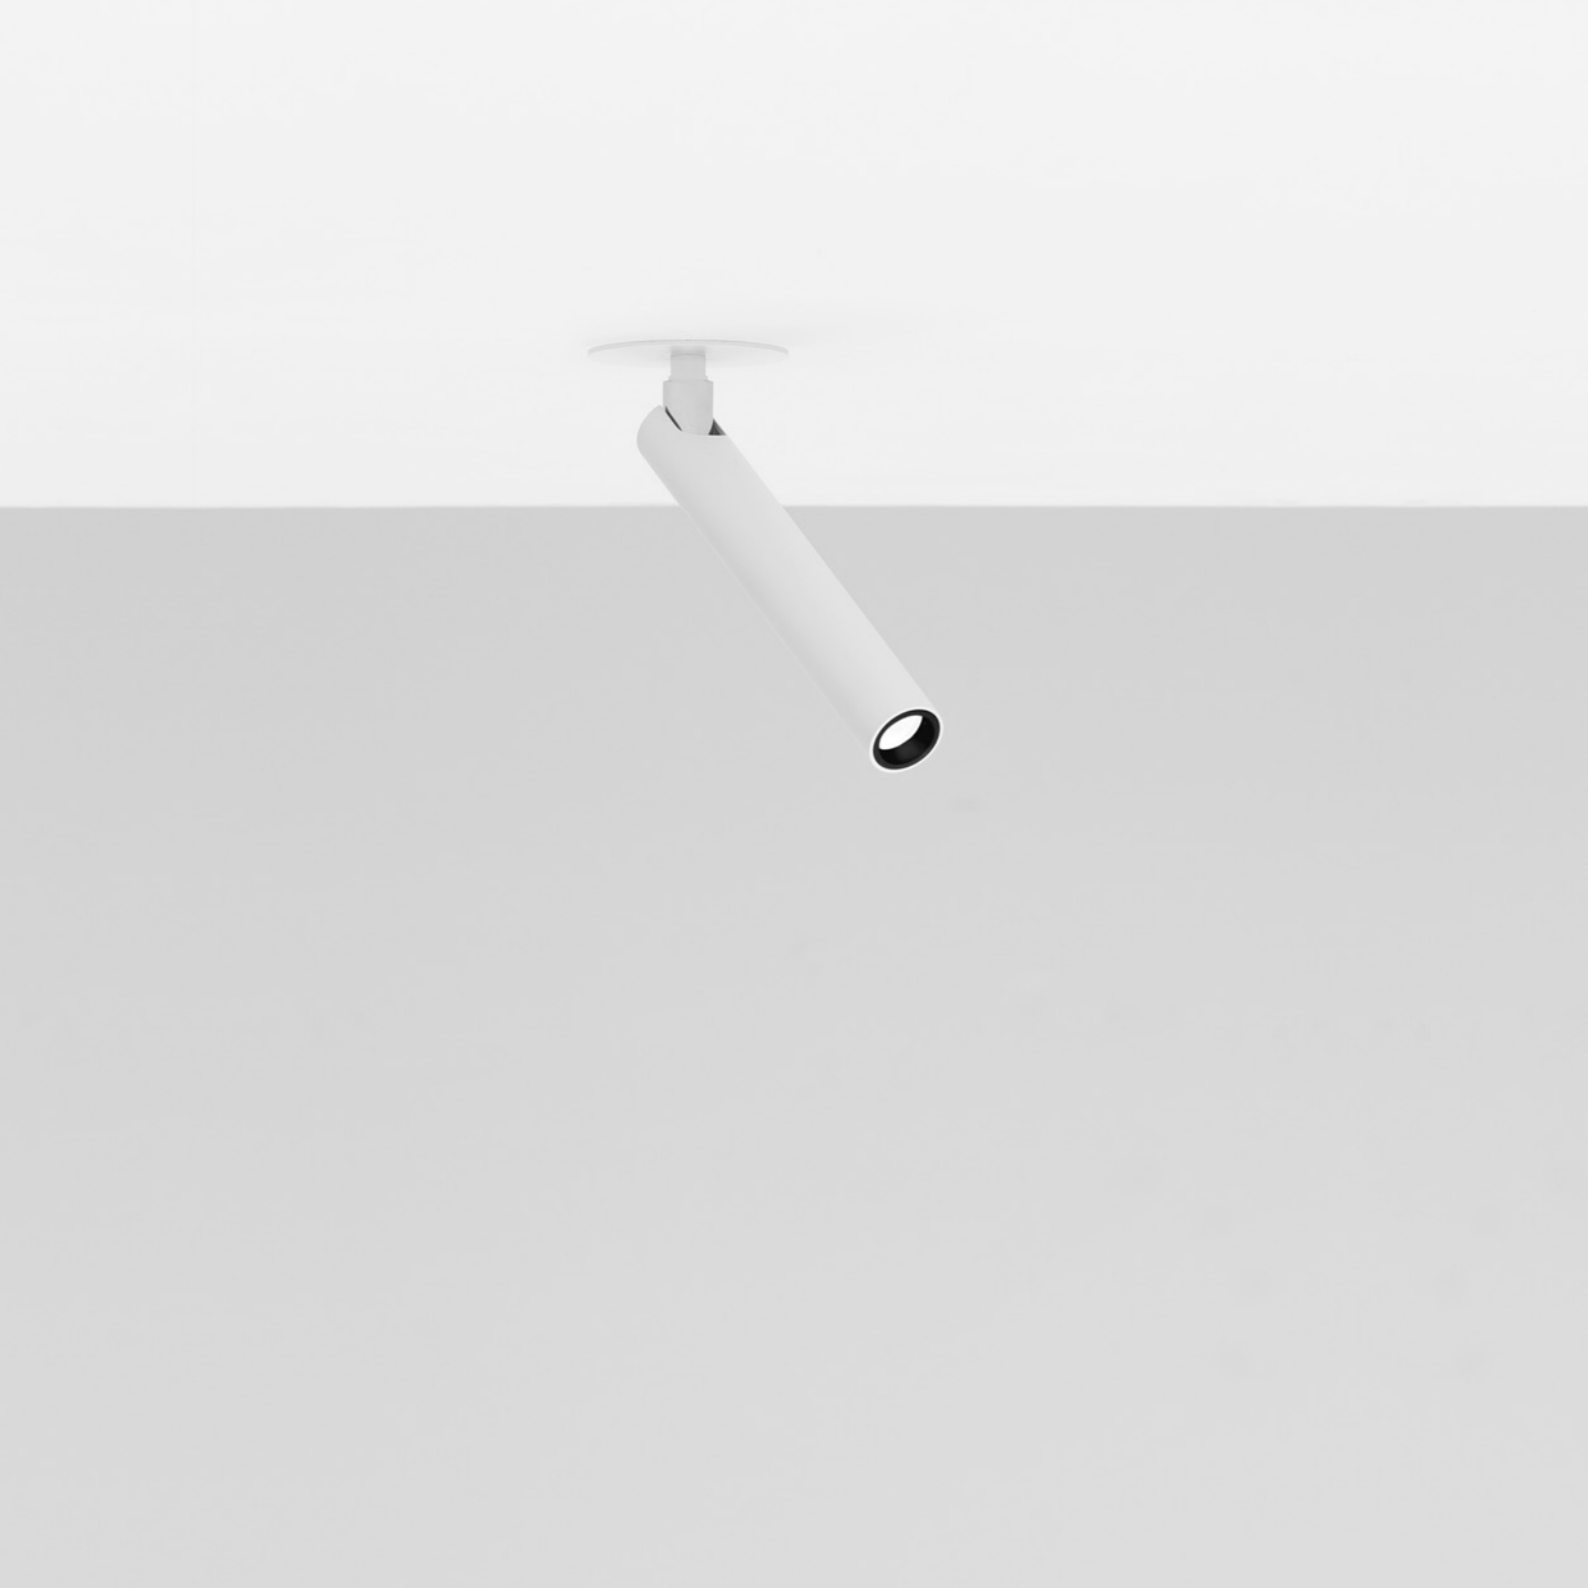

A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.


MIRA R

Omar Carraglia / 2015

Recessed / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Recessed luminaire. Adjustable in all directions. Plasterboard hole: 40x40 mm. Minimum space for recessed installation: 85 mm.



MIRA R


5,6W
 Max 500mA DC
 2700K - 327lm / 3000K - 352lm
 CRI >90
 Driver not included
 CE IP20

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K


1A3690300.27.20
 1A3690300.30.20
 1A3690400.27.20
 1A3690400.30.20

Compulsory accessories


Drivers



Driver		Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/DALI	1Z0241180.500



Driver		Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH - 1-10V	1Z0240870.500



Driver		Not included
220-240V	500mA/20W/IP20/TRIAC/IGBT	1Z0240850.500



An extreme expression of subtraction, uniting optics and electronics as an answer to the ultimate challenge: the absence of structural support and the essence of light.

Nulla is a project that represents both the beginning and end of our work on light.

It's the beginning, in the sense that we have always been looking for absolute light, one coming from a distance, almost without a source. It's the end in that every time we look at Nulla, we feel as though we can't get it better than that.

Nulla generates light and propagates mystery. Nulla is the most generous of our lamps.

Its sole objective is to hide and give all the attention to whatever it is lighting.

What we see is only a tiny black hole, as if it were drawn on the ceiling.

A circle in the ceiling hiding a very bright LED and lens to project the light.

XXIII Compasso d'Oro ADI Award, 2014


Compasso d'Oro ADI
Award 2014



Recessed / Direct / Indoor

Material Metal
Finish .00 Standard

Note Recessed luminaire. Visible 18 / 25 mm diameter hole. NULLA 18 and NULLA 25: lamp extractable for maintenance.




NULLA - 23°

14W
 24V DC
 2700K - 425lm / 3000K - 458lm
 CRI >90
 Beam 23°
 UGR <19
 Driver not included
 CE IP20/IP65

Standard - 2700K
 Standard - 3000K

1A4100000.27.20
 1A4100000.30.20



NULLA - 32°

14W
 24V DC
 2700K - 538lm / 3000K - 579lm
 CRI >90
 Beam 32°
 UGR <19
 Driver not included
 CE IP20/IP65

Standard - 2700K
 Standard - 3000K

1A2110000.27.20
 1A2110000.30.20



NULLA 18 - 20°

4,5W
 24V DC
 2700K - 174lm / 3000K - 186lm
 CRI >90
 Beam 20°
 UGR <19
 Driver not included
 CE IP20

Standard - 2700K
 Standard - 3000K

1A2010000.27.20
 1A2010000.30.20



NULLA 25 - 23°

9W
 24V DC
 2700K - 304lm / 3000K - 327lm
 CRI >90
 Beam 23°
 UGR <19
 Driver not included
 CE IP20/IP65

Standard - 2700K
 Standard - 3000K

1A4080000.27.20
 1A4080000.30.20



NULLA 25 - 32°

9W
 24V DC
 2700K - 384lm / 3000K - 413lm
 CRI >90
 Beam 32°
 UGR <19
 Driver not included
 CE IP20/IP65

Standard - 2700K
 Standard - 3000K


1A2020000.27.20
 1A2020000.30.20

Compulsory accessories


Installation kits



Plasterboard flange 12,5 mm Not included			
Matt Black	Cut-out Ø 21 mm Minimum space for mounting 100 mm IP65	NULLA	1A2200400.00.00



Plasterboard flange 12,5 mm Not included			
Matt Black	Cut-out Ø 22 mm Minimum space for mounting 190 mm	NULLA 18	1A2210400.00.00



Plasterboard flange 12,5 mm Not included			
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 190 mm	NULLA 25	1A2170400.00.00




Plasterboard flange 12,5 mm Not included			
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 145 mm IP65	NULLA 25	1A3980400.00.00




Plasterboard flange (bottom) ≠ 12,5 mm Not included			
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 145 mm IP65	NULLA 25	1A4960400.00.00


Drivers



Driver Not included		
220-240V(100-127V)	24V/16W(15W)/IP20/DALI	1Z0241180.24



Driver Not included		
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH	1Z0240870.24




Driver Not included		
220-240V	24V/20W/IP20/TRIAC/IGBT	1Z0240850.24

Optional accessories


Installation kits




Trapdoor for plasterboard 12,5 mm Not included			
Standard	Cut-out 205x205 mm	NULLA	1A3780000.00.00




Trapdoor for plasterboard 12,5 mm Not included			
Standard	Cut-out 415x415 mm	NULLA	1A3790000.00.00




Masonry Box Not included			
Standard		NULLA 18	1A2390000.00.00




Concrete box Not included			
Standard		NULLA 18	1A2240000.00.00




Masonry Box Not included			
Standard		NULLA 25	1A2380000.00.00




Concrete box Not included			
Standard		NULLA 25	1A2230000.00.00

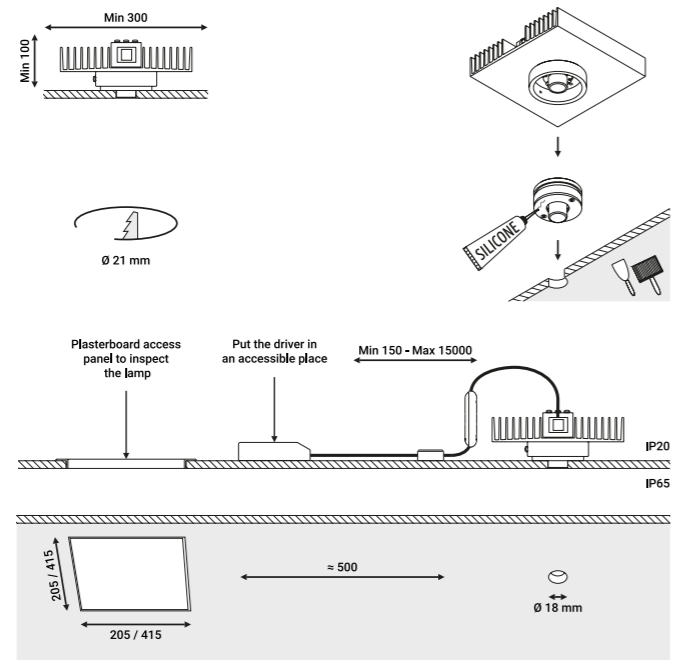

NULLA installation conditions

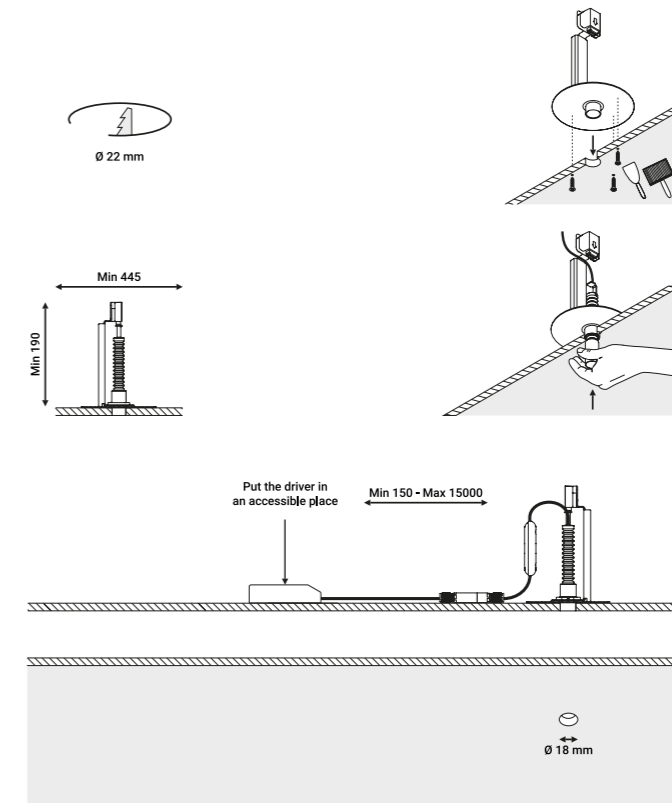

NULLA 18 installation conditions

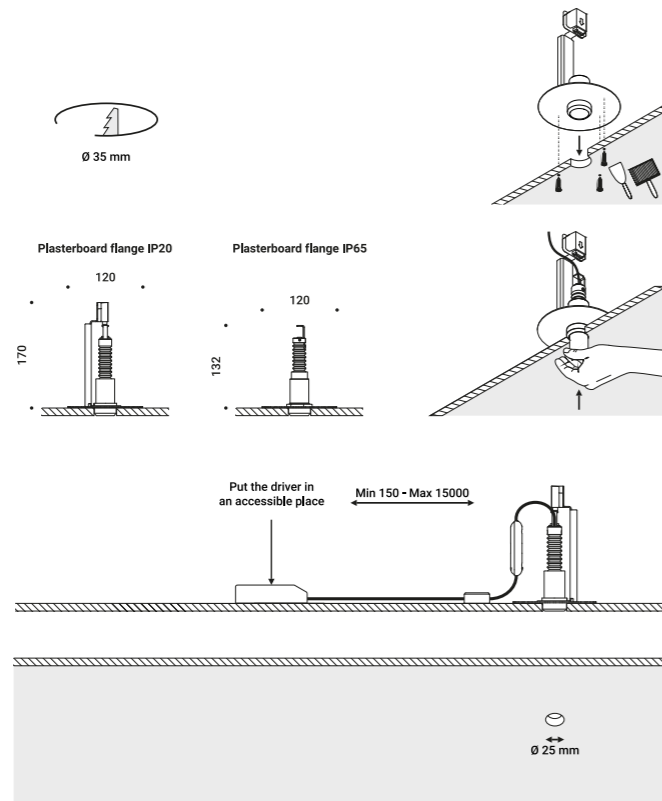

NULLA 25 installation conditions





A tool to light.
The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Recessed / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Recessed luminaire. Adjustable in all directions. Plasterboard hole: 133x148 mm. Minimum space for recessed installation: 180 mm.



PUNTO

Max 21W
 Max 500mA DC
 CRI >90
 Driver not included
 LED module not included



Matt White
 Matt Black

1A1100300.00.20
 1A1100400.00.20

Compulsory accessories

Installation kits



Plasterboard frame 12,5 mm		Not included
Matt White	Cut-out 133x148 mm Minimum space for mounting 180 mm	1A3510300.00.00
Matt Black	Cut-out 133x148 mm Minimum space for mounting 180 mm	1A3510400.00.00

LED modules



DG111 LED module		Not included
16,7W - 15° - 500mA DC	2700K - 1648lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.27.20
16,7W - 15° - 500mA DC	3000K - 1682lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.30.20




DG111 LED module		Not included
16,7W - 22° - 500mA DC	2700K - 1859lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.27.20
16,7W - 22° - 500mA DC	3000K - 1945lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.30.20




DG111 LED module		Not included
16,7W - 36° - 500mA DC	2700K - 1808lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.27.20
16,7W - 36° - 500mA DC	3000K - 1890lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.30.20


Drivers



Driver		Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/DALI	1Z0241180.500




Driver		Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH	1Z0240840.500




Driver		Not included
220-240V	500mA/20W/IP20/TRIAC/IGBT	1Z0240850.500

Optional accessories


Other accessories



Accessory holder + Soft filter + Honeycomb louvre		Not included
Matt Black		1X0070400.04.00




Accessory holder + Elliptical filter		Not included
Matt Black		1X0070400.05.00




Blue filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00



Red filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00



Yellow filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00



SYSTEMS

ENDLESS


Davide Groppi / 2018





Absolute freedom, absolute spatiality, absolute creativity.
An adhesive tape that conducts electricity can be placed anywhere
on walls and ceilings to power our lighting projects.
Endless is the system created and patented by our Team in order to transport
electric energy in a digital and graphic manner.
It's the idea of considering walls and ceilings like electronic circuits,
where luminaires can be done fixed freely and easily.
This system comes with various accessories
to provide and manage the flow of electricity.

201811 3990010 device_group1 + MAX 48V DC MAX 4A MAX 150W 201811 3990010 device_group1 + MAX 48V DC MAX 4A MAX 150W 201811 3990010 device_group1 + MAX 48V DC MAX 4A MAX 150W



POWER SUPPLY MAX 4A DRY LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX 4A DRY LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX 4A DRY LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX 4A DRY LOCATION ONLY

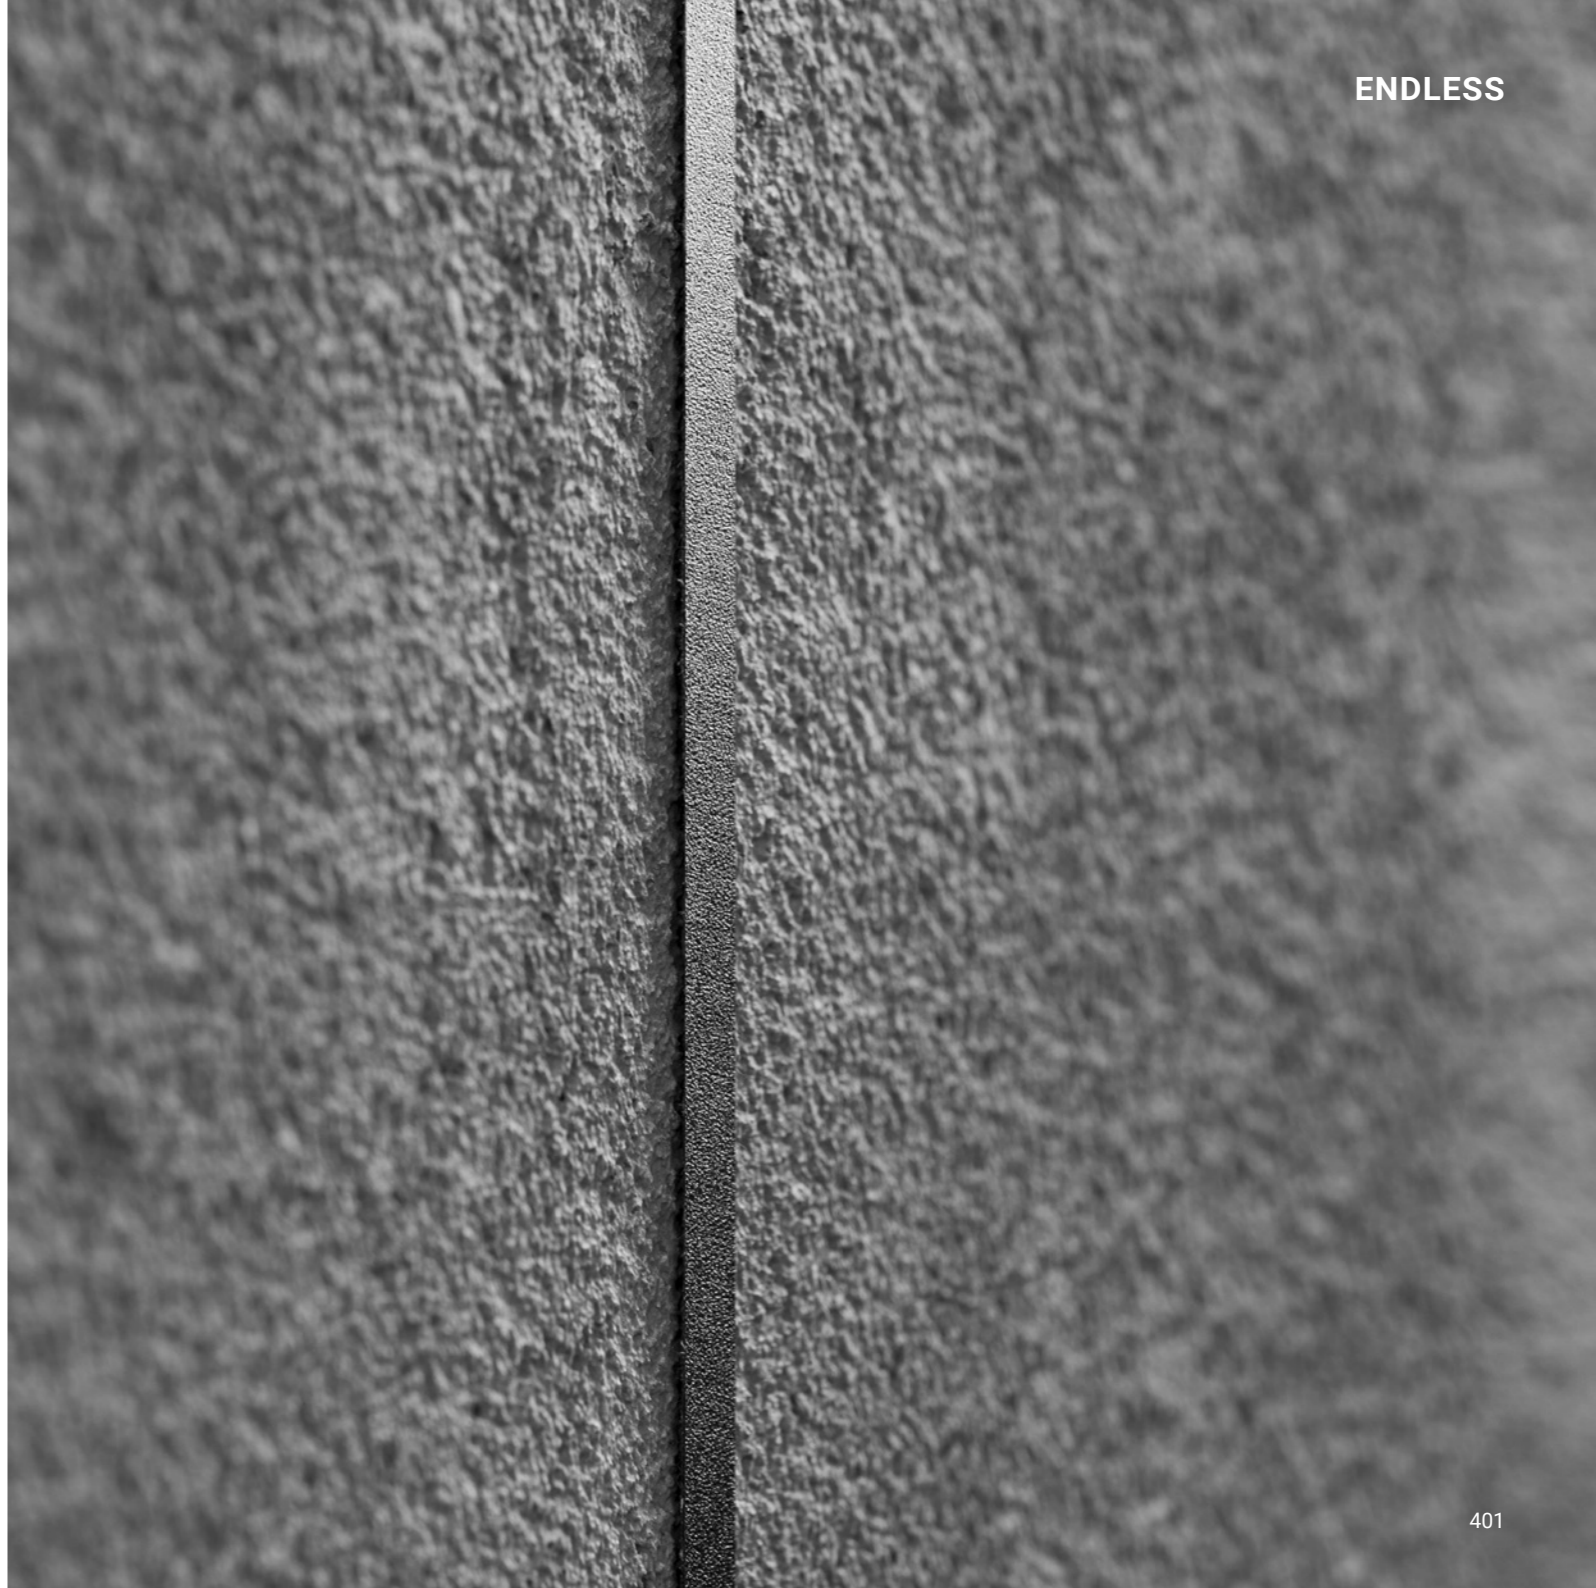


ENDLESS ON/OFF
(Max 48V DC -
Max 150W - Max 4A)

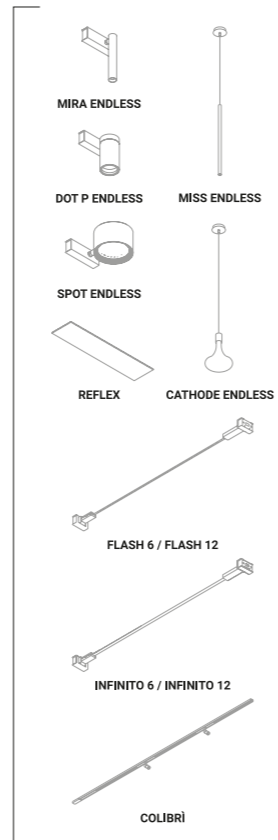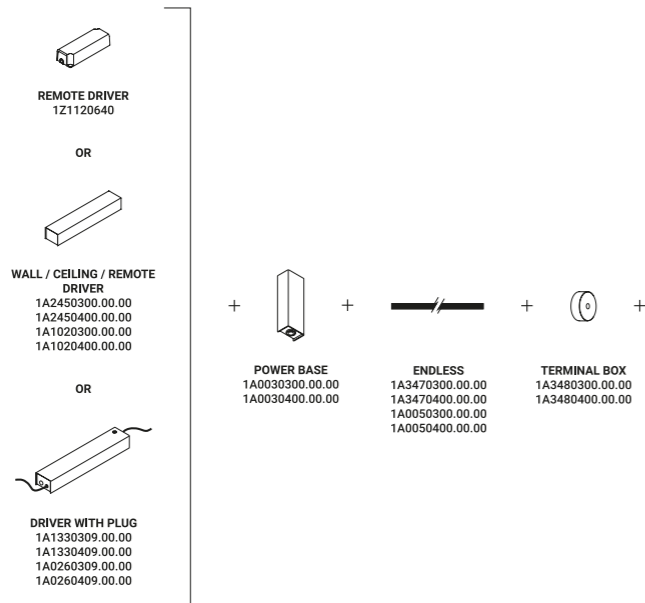


ENDLESS dimmable
(Max 48V DC -
Max 150W - Max 4A)

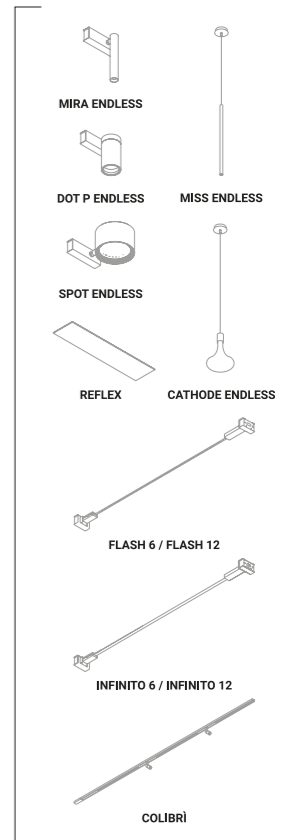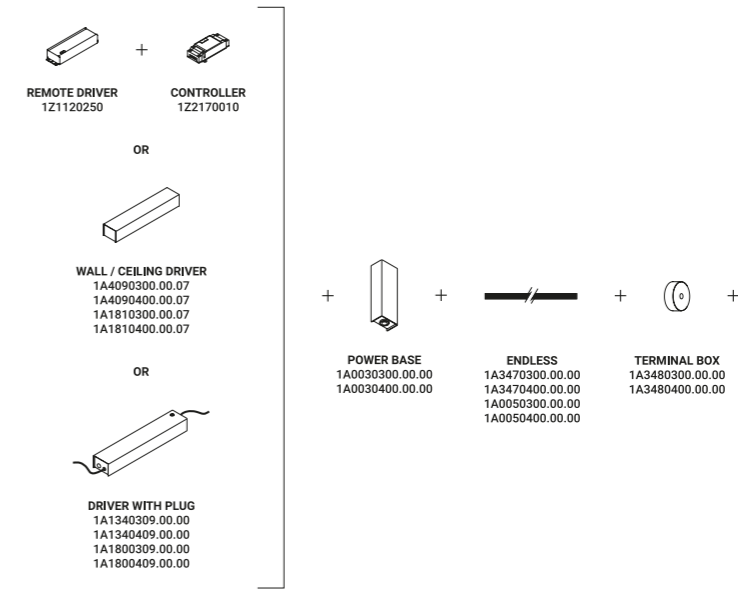

ENDLESS CASAMBI
(Max 48V DC -
Max 150W - Max 4A)

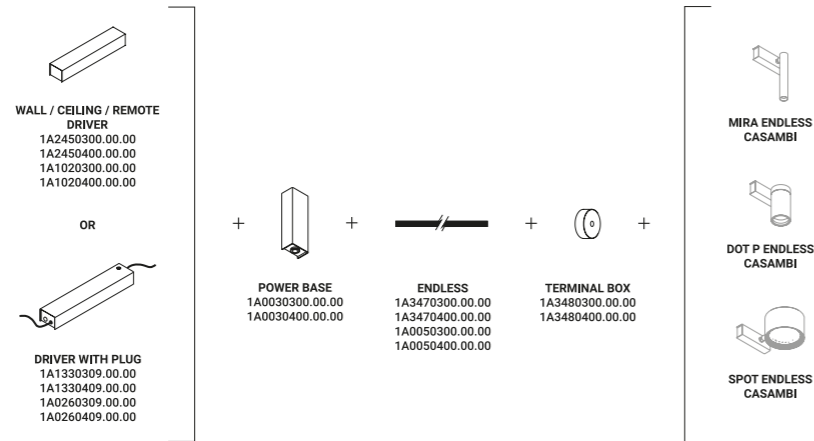

ENDLESS conductive tape
used with voltage/current
other than 48V DC

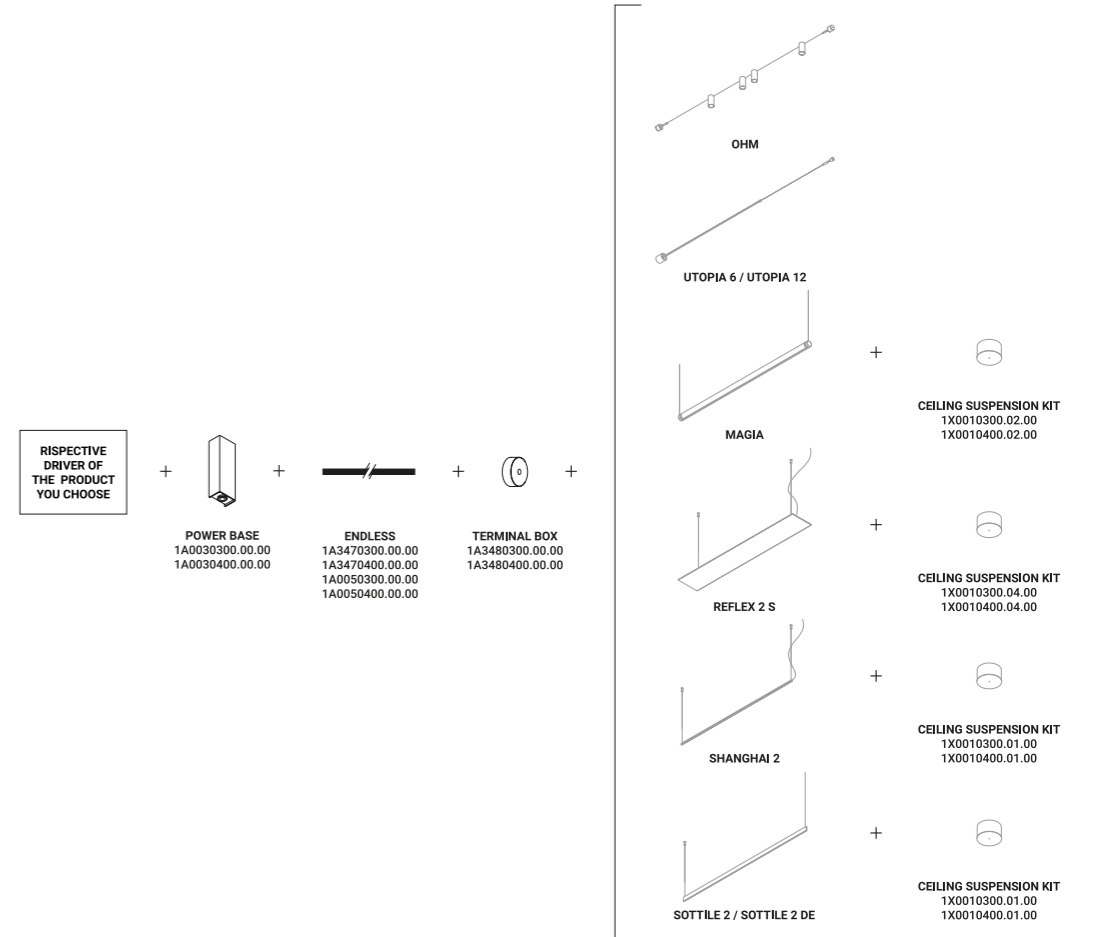


Davide Groppi / 2018

Systems / Direct-Indirect-Diffuse / Indoor

Material Metal
Finish .00 Standard

Note System consisting of a conductive adhesive tape to apply to surfaces.
 Possibility to connect several lamps (Max 48V DC - Max 150W - Max 4A).

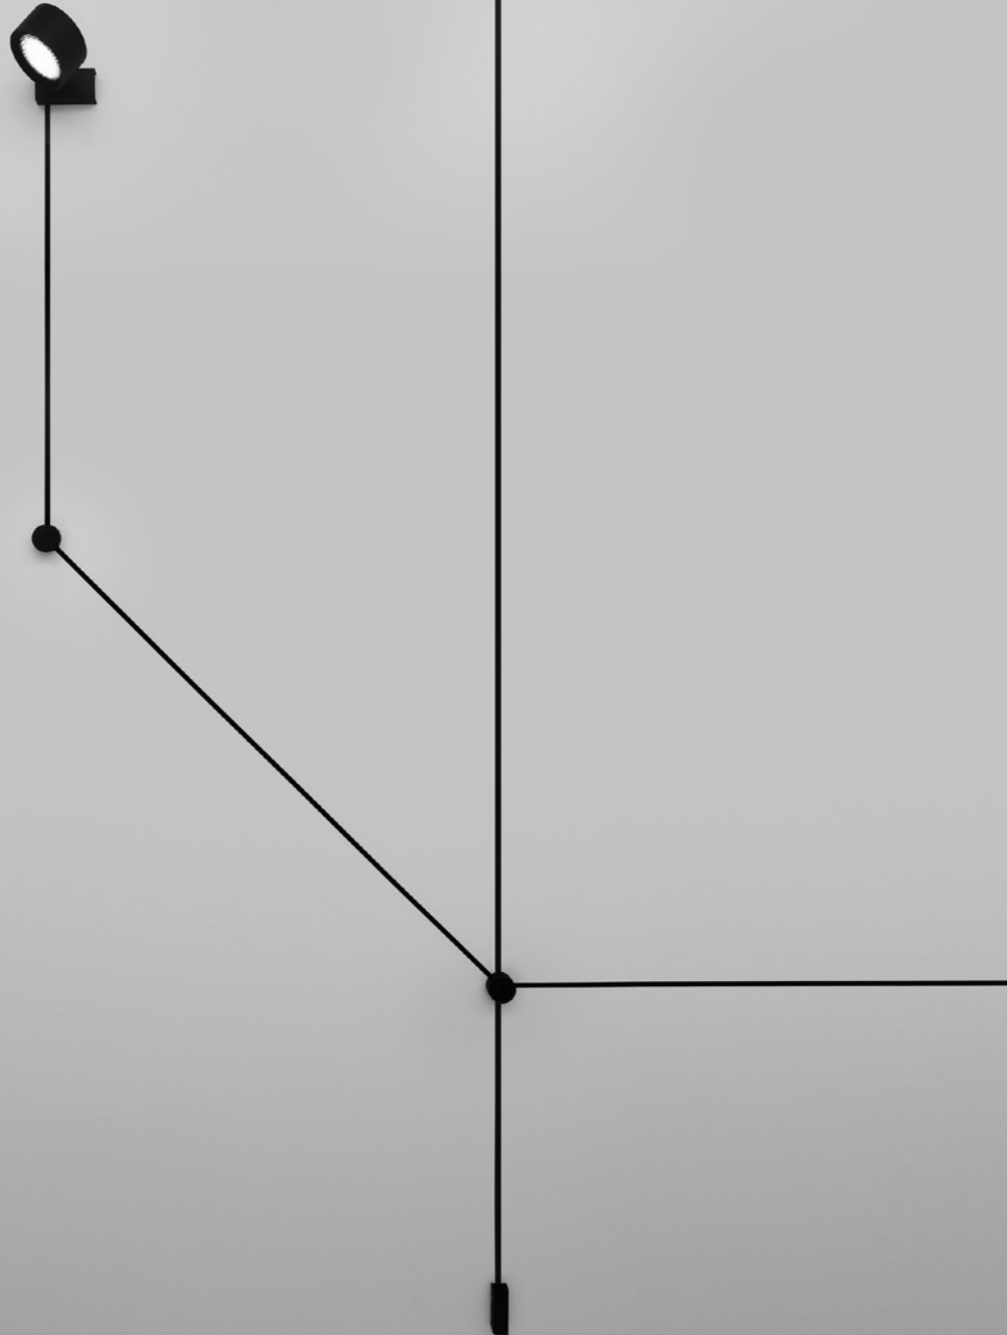

Optional accessories

Installation kits




Strip Endless - 5 m			Not included
Matt White	Output 48V - Max 150W - Max 4A	1A3470300.00.00	
Matt Black	Output 48V - Max 150W - Max 4A	1A3470400.00.00	




Strip Endless - 10 m			Not included
Matt White	Output 48V - Max 150W - Max 4A	1A0050300.00.00	
Matt Black	Output 48V - Max 150W - Max 4A	1A0050400.00.00	



Fixing rough walls kit			Not included
	Length 2,5 m	1A0370000.00.00	



Terminal box			Not included
Matt White	2 Terminals included	1A3480300.00.00	
Matt Black	2 Terminals included	1A3480400.00.00	




Power base			Not included
Matt White		1A0030300.00.00	
Matt Black		1A0030400.00.00	




Terminals			Not included
	2 Pieces	1A3490000.00.00	

Optional accessories


Drivers for ENDLESS ON/OFF system and CASAMBI




Driver with plug		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - 60W - Max 1,25A IP20 - ON/OFF	1A1330309.00.00
Matt Black	Input 100-240V - 50/60Hz Output 48V - 60W - Max 1,25A IP20 - ON/OFF	1A1330409.00.00



Wall/ceiling/remote driver		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - 60W - Max 1,25A IP20 - ON/OFF	1A2450300.00.00
Matt Black	Input 100-240V - 50/60Hz Output 48V - 60W - Max 1,25A IP20 - ON/OFF	1A2450400.00.00




Driver with plug		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - 150W - Max 3,125A IP20 - ON/OFF	1A0260309.00.00
Matt Black	Input 100-240V - 50/60Hz Output 48V - 150W - Max 3,125A IP20 - ON/OFF	1A0260409.00.00




Wall/ceiling/remote driver		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - 150W - Max 3,125A IP20 - ON/OFF	1A1020300.00.00
Matt Black	Input 100-240V - 50/60Hz Output 48V - 150W - Max 3,125A IP20 - ON/OFF	1A1020400.00.00

Optional accessories


Drivers for ENDLESS dimmable system and CASAMBI




Driver with plug		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - 60W - Max 1,25A IP20 - Dimmer on board	1A1340309.00.06
Matt Black	Input 100-240V - 50/60Hz Output 48V - 60W - Max 1,25A IP20 - Dimmer on board	1A1340409.00.06



Wall/ceiling driver		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - 60W - Max 1,25A IP20 - DALI - PUSH - 1-10V	1A4090300.00.07
Matt Black	Input 100-240V - 50/60Hz Output 48V - 60W - Max 1,25A IP20 - DALI - PUSH - 1-10V	1A4090400.00.07



Driver with plug		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - 150W - Max 3,125A IP20 - Dimmer on board	1A1800309.00.06
Matt Black	Input 100-240V - 50/60Hz Output 48V - 150W - Max 3,125A IP20 - Dimmer on board	1A1800409.00.06




Wall/ceiling driver		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - 150W - Max 3,125A IP20 - DALI - PUSH - 1-10V	1A1810300.00.07
Matt Black	Input 100-240V - 50/60Hz Output 48V - 150W - Max 3,125A IP20 - DALI - PUSH - 1-10V	1A1810400.00.07




Optional accessories


Remote drivers for ENDLESS




Driver			Not included
100-240V	48V/60W/IP67/ON/OFF	1Z1120640	




Driver			Not included
100-240V	48V/150W/IP67/1-10V	1Z1120250	




Controller			Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010	

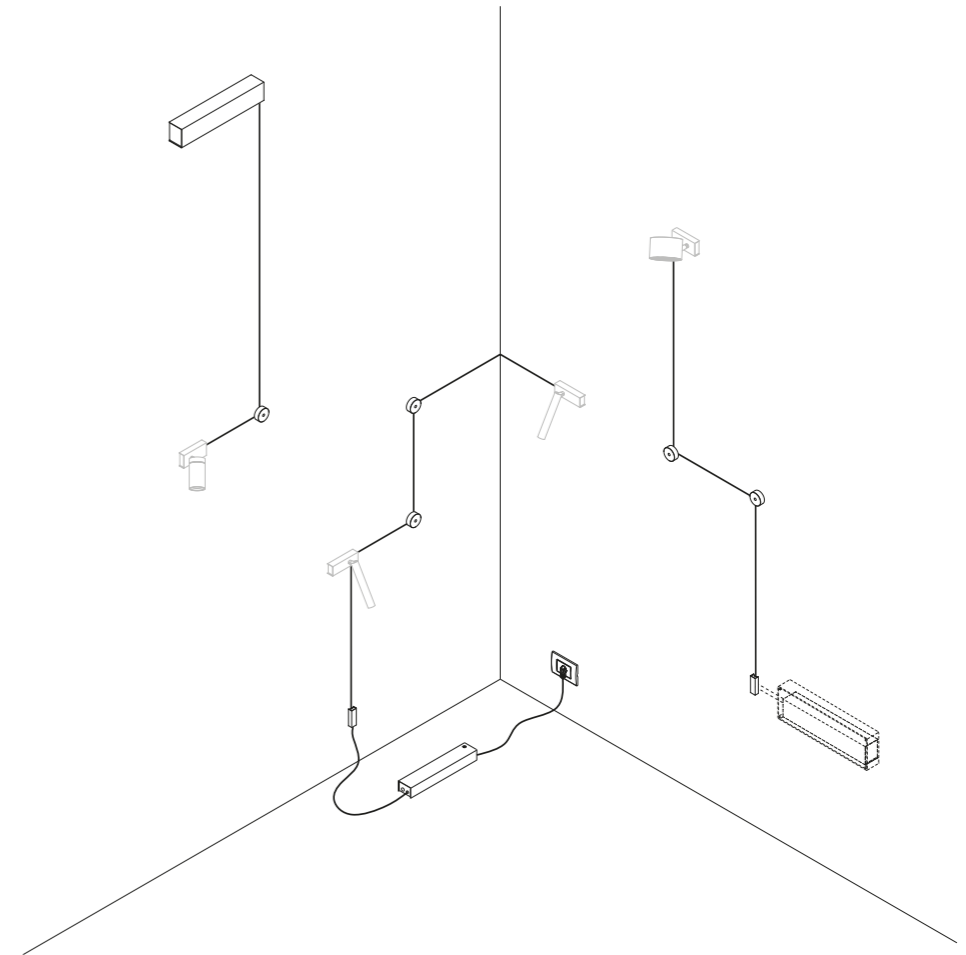


Examples of installation with the three different power supply modes

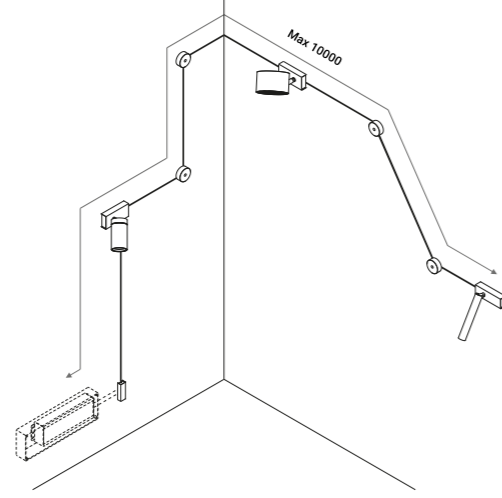


Example of combined installation between various devices with remote driver

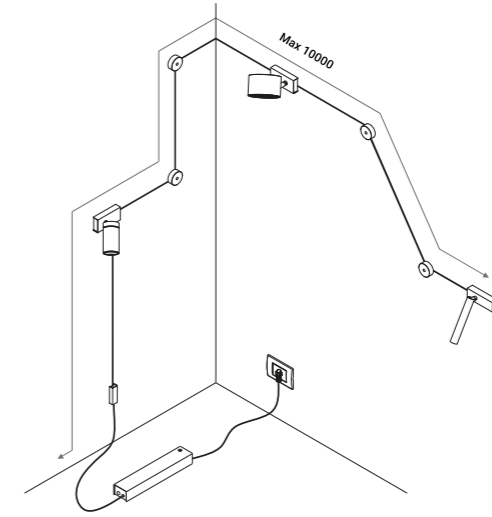


Example of combined installation between various devices with driver with plug

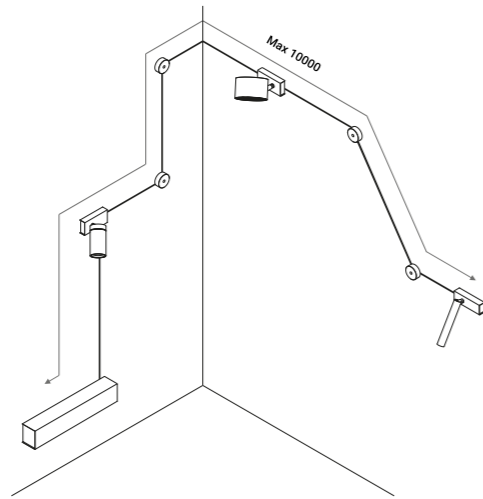

Example of combined installation between various devices with wall/ceiling driver

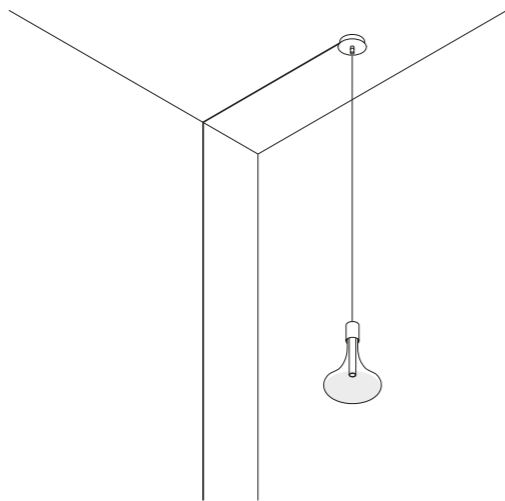


CATHODE: example of installation

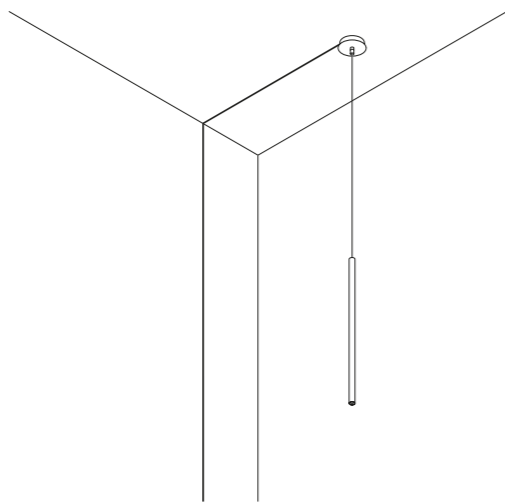


MISS: example of installation




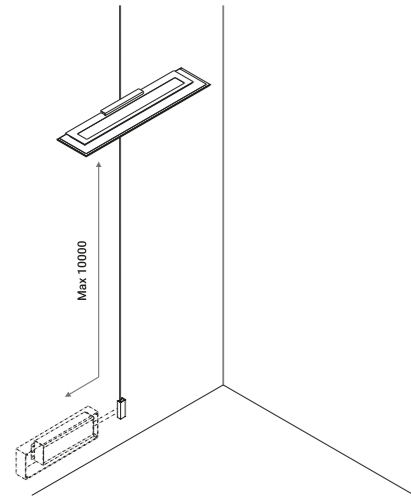


REFLEX: example of installation with remote driver

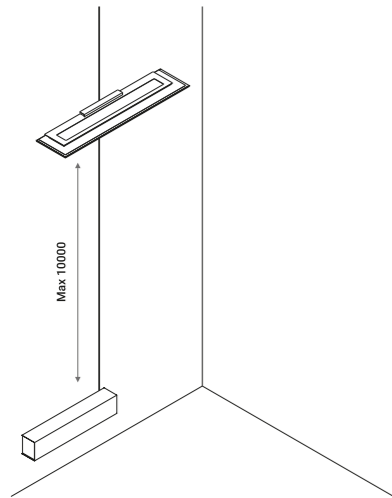


REFLEX: example of installation with wall/ceiling driver

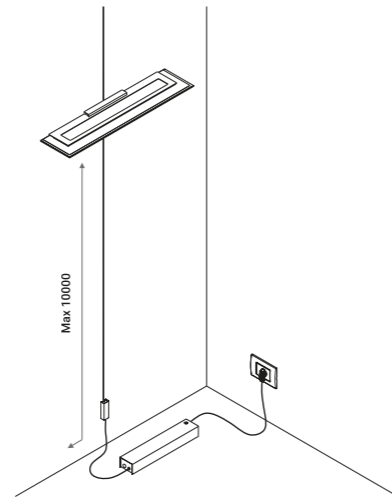


REFLEX: example of installation with driver with plug

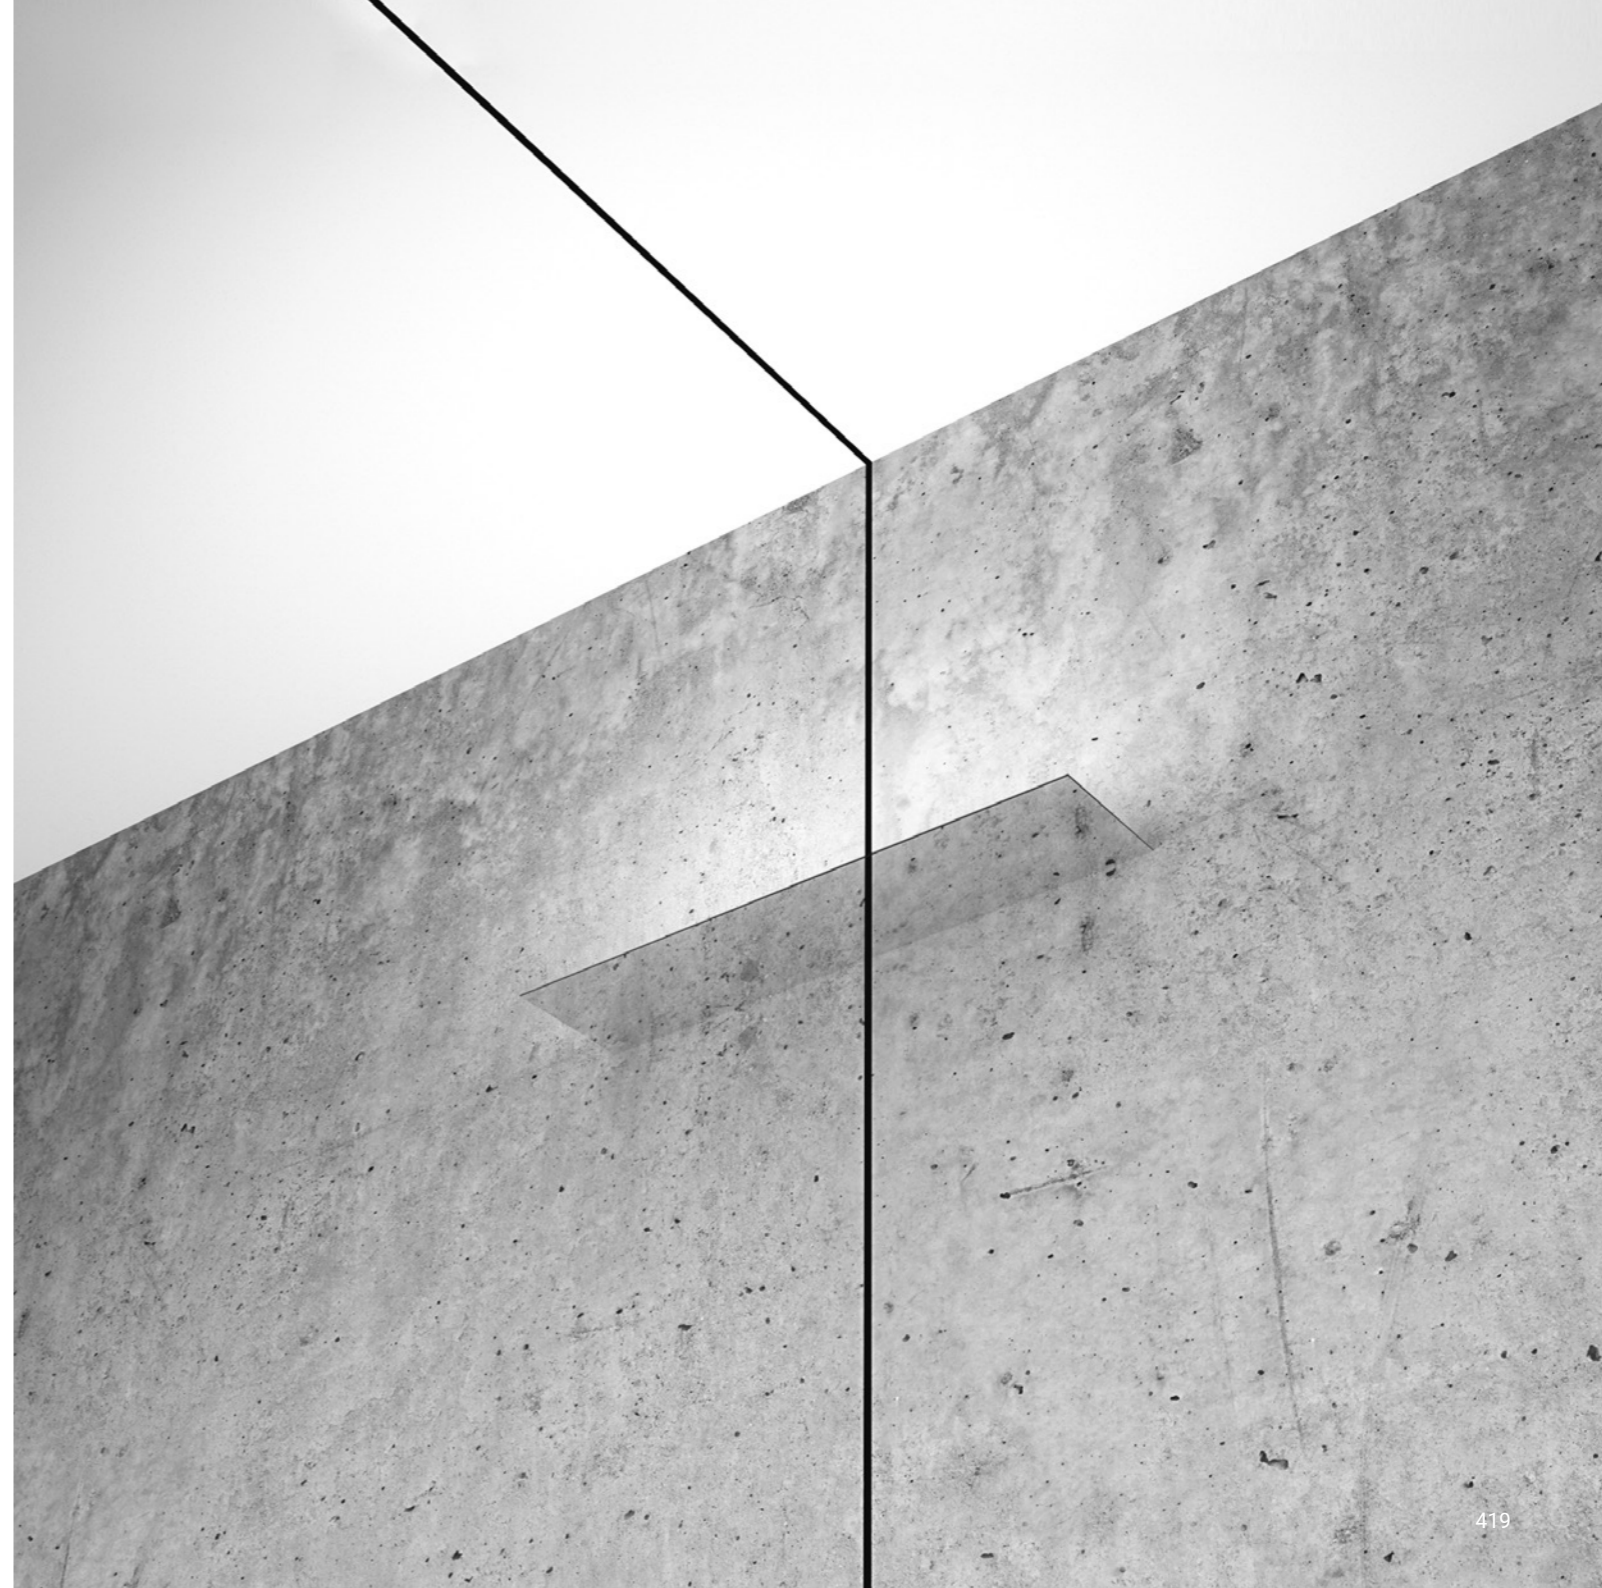


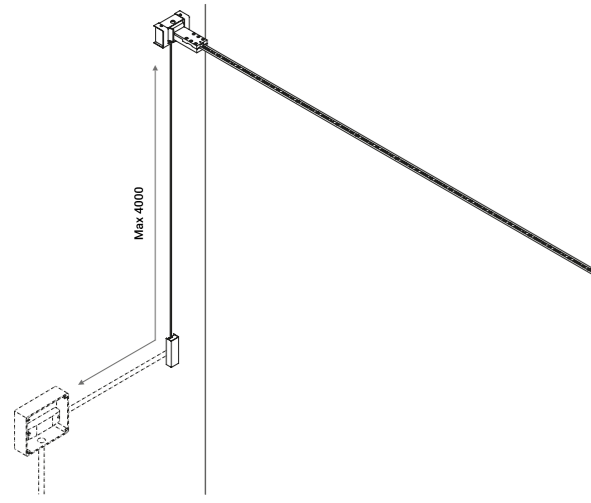

FLASH and INFINITO: example of installation with remote driver

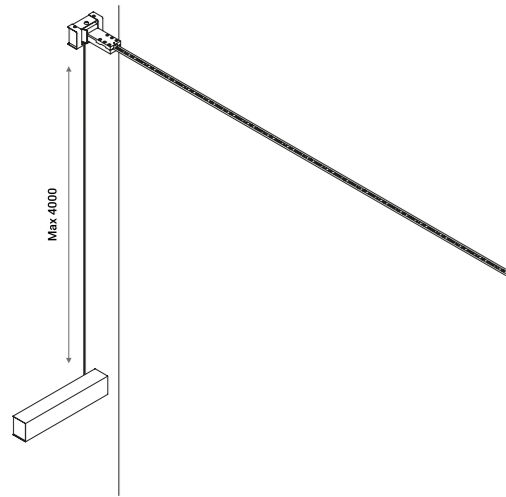


FLASH and INFINITO: example of installation with wall/ceiling driver

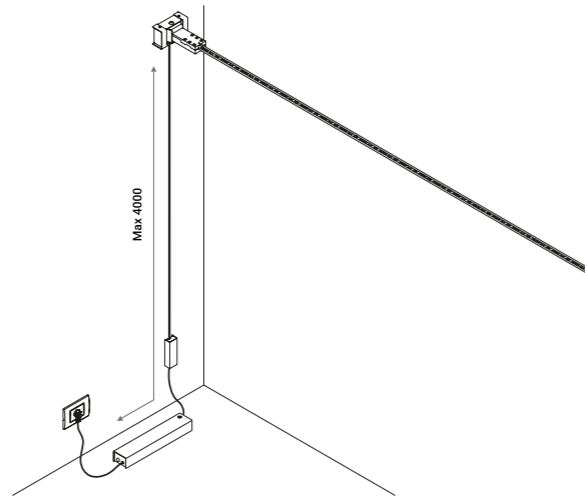

FLASH and INFINITO: example of installation with driver with plug




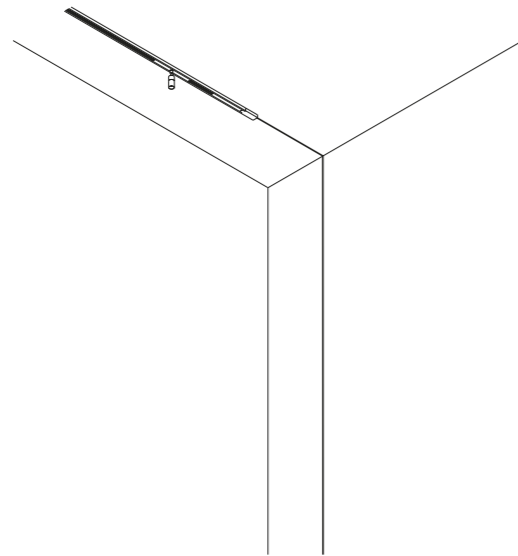


COLIBRI: example of installation




1A4170000.20.00
COLIBRI ENDLESS connector

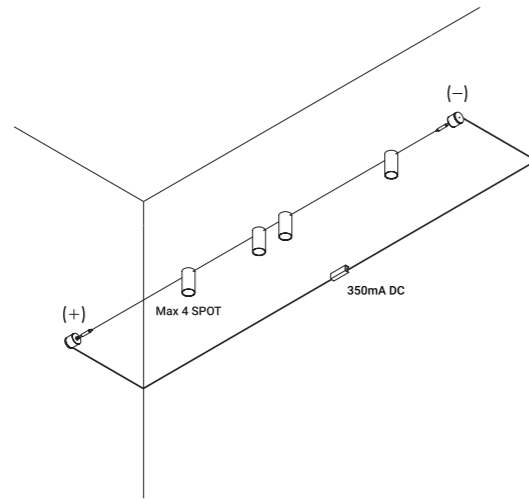

OHM: example of installation

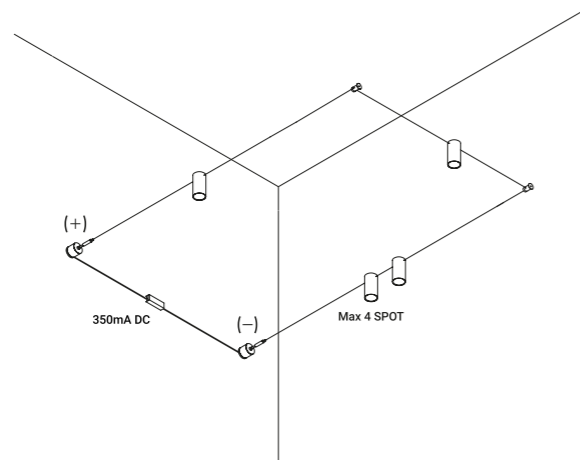


OHM: example of installation

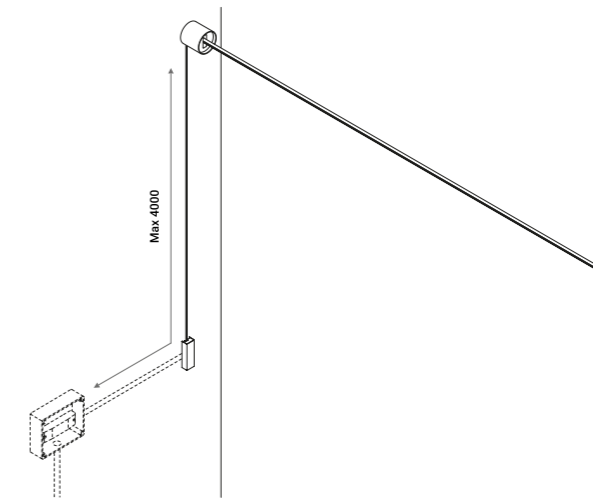

UTOPIA: example of installation

1X001XX00.02.00 - 1X001XX00.04.00
Ceiling suspension kit

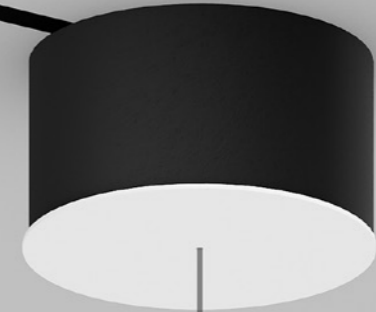




FLASH


Davide Groppi / 2017

It is our Infinito model turned around, with the light flowing downwards.
The 9 mm wide stainless steel strip can run perfectly up to 36 metres in length
(standard versions at 6 / 12 / 18 metres in length).
The ideal solution for direct illumination of spaces with very high ceilings.
Its name pays homage to the famous comic book superhero,
who can run seven times the speed of light.
Luminaire designed also to be powered by ENDLESS system.

How to order - FLASH 6

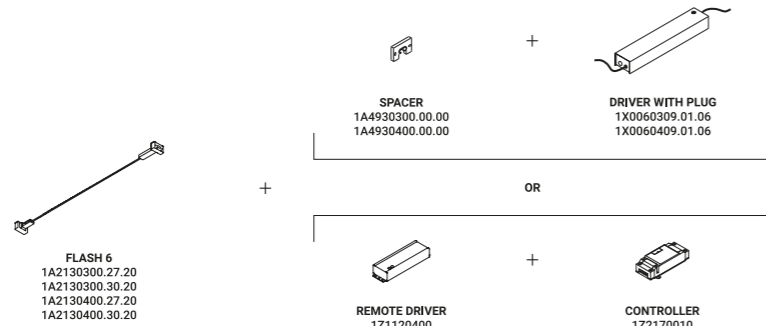

How to order - FLASH 12

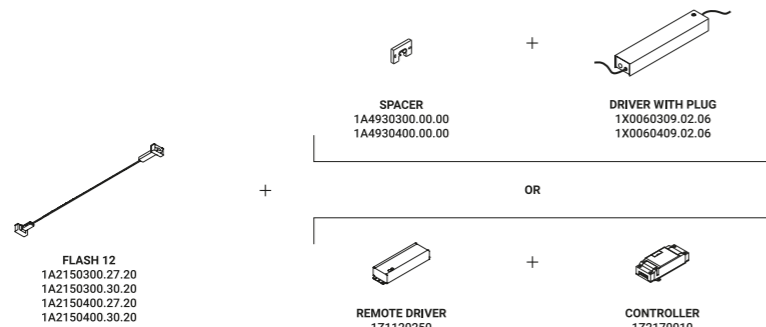

How to order - FLASH 18



Wall-Systems / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Special stainless steel tape (9 mm) running from wall to wall. Available in 6 / 12 / 18 m with a single power unit and uniform lighting. Available in Dual emission (DE) and Tunable White (TW - 5 / 10 m) versions. LED strip that can be divided every 96,6 mm. DE versions are available with dual on/off (two drivers required). FLASH 6 and FLASH 12: possibility for the luminaires to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

FLASH 6
57W - 1,48A
48V DC
2700K - 6576lm / 3000K - 6708lm
CRI >90
Driver not included
CE IP20 E

Matt White - 2700K	1A2130300.27.20
Matt White - 3000K	1A2130300.30.20
Matt Black - 2700K	1A2130400.27.20
Matt Black - 3000K	1A2130400.30.20


FLASH 12
114W - 2,61A
48V DC
2700K - 13152lm / 3000K - 13416lm
CRI >90
Driver not included
CE IP20 E

Matt White - 2700K	1A2150300.27.20
Matt White - 3000K	1A2150300.30.20
Matt Black - 2700K	1A2150400.27.20
Matt Black - 3000K	1A2150400.30.20


FLASH 18
171W
48V DC
2700K - 19728lm / 3000K - 20124lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K	1A2900300.27.20
Matt White - 3000K	1A2900300.30.20
Matt Black - 2700K	1A2900400.27.20
Matt Black - 3000K	1A2900400.30.20



How to order -
FLASH 6 DE

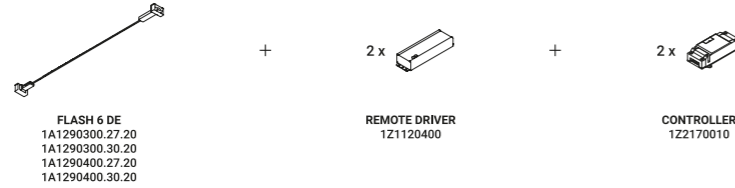

How to order -
FLASH 12 DE

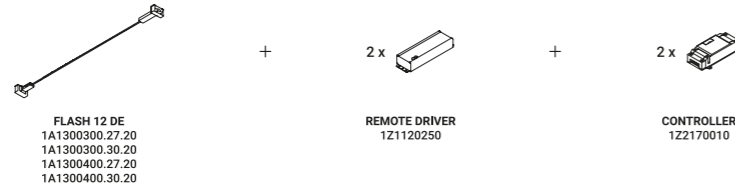

How to order -
FLASH 18 DE

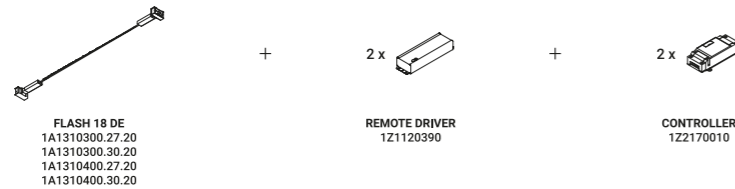


FLASH 6 DE

Dual emission
114W
48V DC
2700K - Up 6576lm - Down 6576lm /
3000K - Up 6708lm - Down 6708lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A1290300.27.20
1A1290300.30.20
1A1290400.27.20
1A1290400.30.20

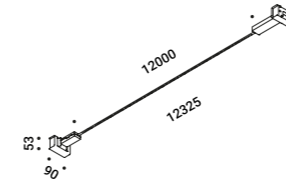


FLASH 12 DE

Dual emission
228W
48V DC
2700K - Up 13152lm - Down 13152lm /
3000K - Up 13416lm - Down 13416lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A1300300.27.20
1A1300300.30.20
1A1300400.27.20
1A1300400.30.20

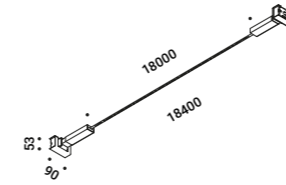


FLASH 18 DE

Dual emission
342W
48V DC
2700K - Up 19728lm - Down 19728lm /
3000K - Up 20124lm - Down 20124lm
CRI >90
Driver not included
CE IP20


Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A1310300.27.20
1A1310300.30.20
1A1310400.27.20
1A1310400.30.20


How to order -
FLASH 5 TW

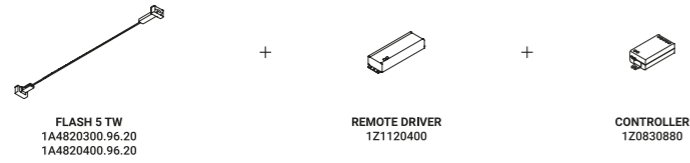

How to order -
FLASH 10 TW

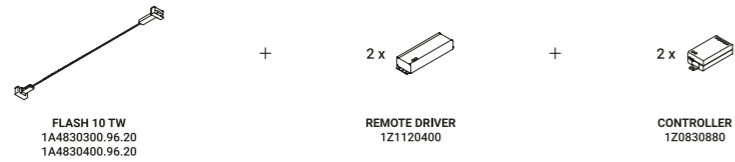


Note Tunable White describes the variable colour temperature controls from warm white to cool white light.



FLASH 5 TW
Tunable White
50W
24V DC
2700K / 6500K - 7650lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K / 6500K
Matt Black - 2700K / 6500K

1A4820300.96.20
1A4820400.96.20

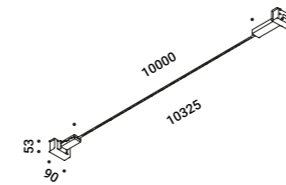


FLASH 10 TW
Tunable White
100W
24V DC
2700K / 6500K - 15300lm
CRI >90
Driver not included
CE IP20


Matt White - 2700K / 6500K
Matt Black - 2700K / 6500K

1A4830300.96.20
1A4830400.96.20

How to order -
FLASH 5 DE TW

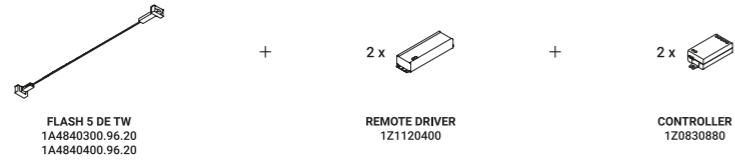

How to order -
FLASH 10 DE TW

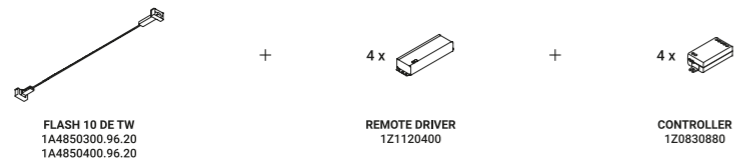


Note Tunable White describes the variable colour temperature controls from warm white to cool white light.



FLASH 5 DE TW
Dual emission - Tunable White
100W
24V DC
2700K / 6500K - 15300lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K / 6500K
Matt Black - 2700K / 6500K

1A4840300.96.20
1A4840400.96.20







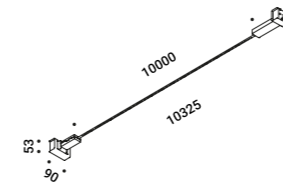


FLASH 10 DE TW
Dual emission - Tunable White
200W
24V DC
2700K / 6500K - 30600lm
CRI >90
Driver not included
CE IP20







Matt White - 2700K / 6500K
Matt Black - 2700K / 6500K


1A4850300.96.20
1A4850400.96.20

Compulsory accessories


Drivers			
	Driver with plug		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 57W - IP20 Dimmer on board	FLASH 6	1X0060309.01.06
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 57W - IP20 Dimmer on board	FLASH 6	1X0060409.01.06
	Driver with plug		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 114W - IP20 Dimmer on board	FLASH 12	1X0060309.02.06
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 114W - IP20 Dimmer on board	FLASH 12	1X0060409.02.06
	Driver		Not included
100-240V	48V/80W/IP67/1-10V	FLASH 6 / FLASH 6 DE / FLASH 5 TW / FLASH 5 DE TW	1Z1120400
	Driver		Not included
100-240V	48V/150W/IP67/1-10V	FLASH 12 / FLASH 12 DE / FLASH 10 TW / FLASH 10 DE TW	1Z1120250
	Driver		Not included
100-240V	48V/240W/IP67/1-10V	FLASH 18 / FLASH 18 DE	1Z1120390
	Controller		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	FLASH 6 / FLASH 12 / FLASH 18 / FLASH 6 DE / FLASH 12 DE / FLASH 18 DE	1Z2170010
	Controller Casambi - Tunable White		Not included
		FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW	1Z0830880

Optional accessories


Installation kits			
	Spacer		Not included
Matt White	For driver kit with plug	FLASH 6 / FLASH 12	1A4930300.00.00
Matt Black	For driver kit with plug	FLASH 6 / FLASH 12	1A4930400.00.00
	Ceiling installation kit		Not included
Matt Black			1A0080400.00.00
	Kit wall connection vertical sloped 45°		Not included
Matt Black			1A0120400.00.00
	Kit wall connection sloped right 75°		Not included
Matt Black			1A0340400.00.00
	Kit wall connection sloped left 75°		Not included
Matt Black			1A0350400.00.00
	Swallows		Not included
Matt Black			1A0800400.00.00

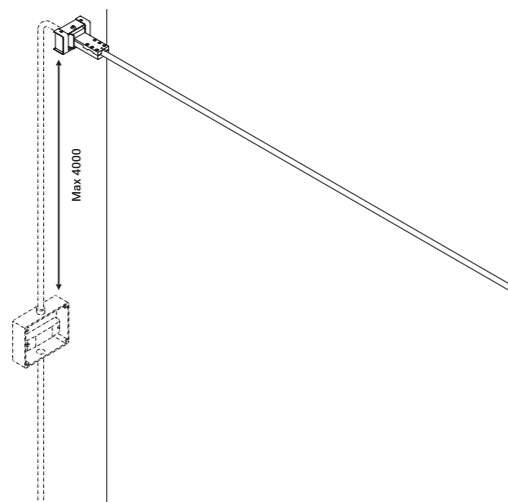


Example of installation with remote driver

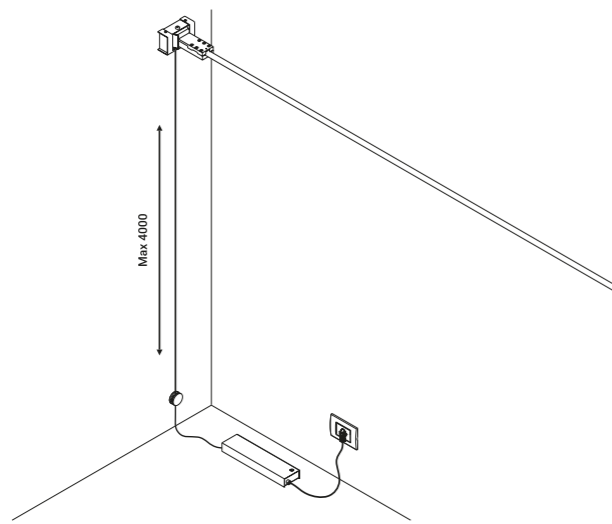


Example of installation with driver with plug

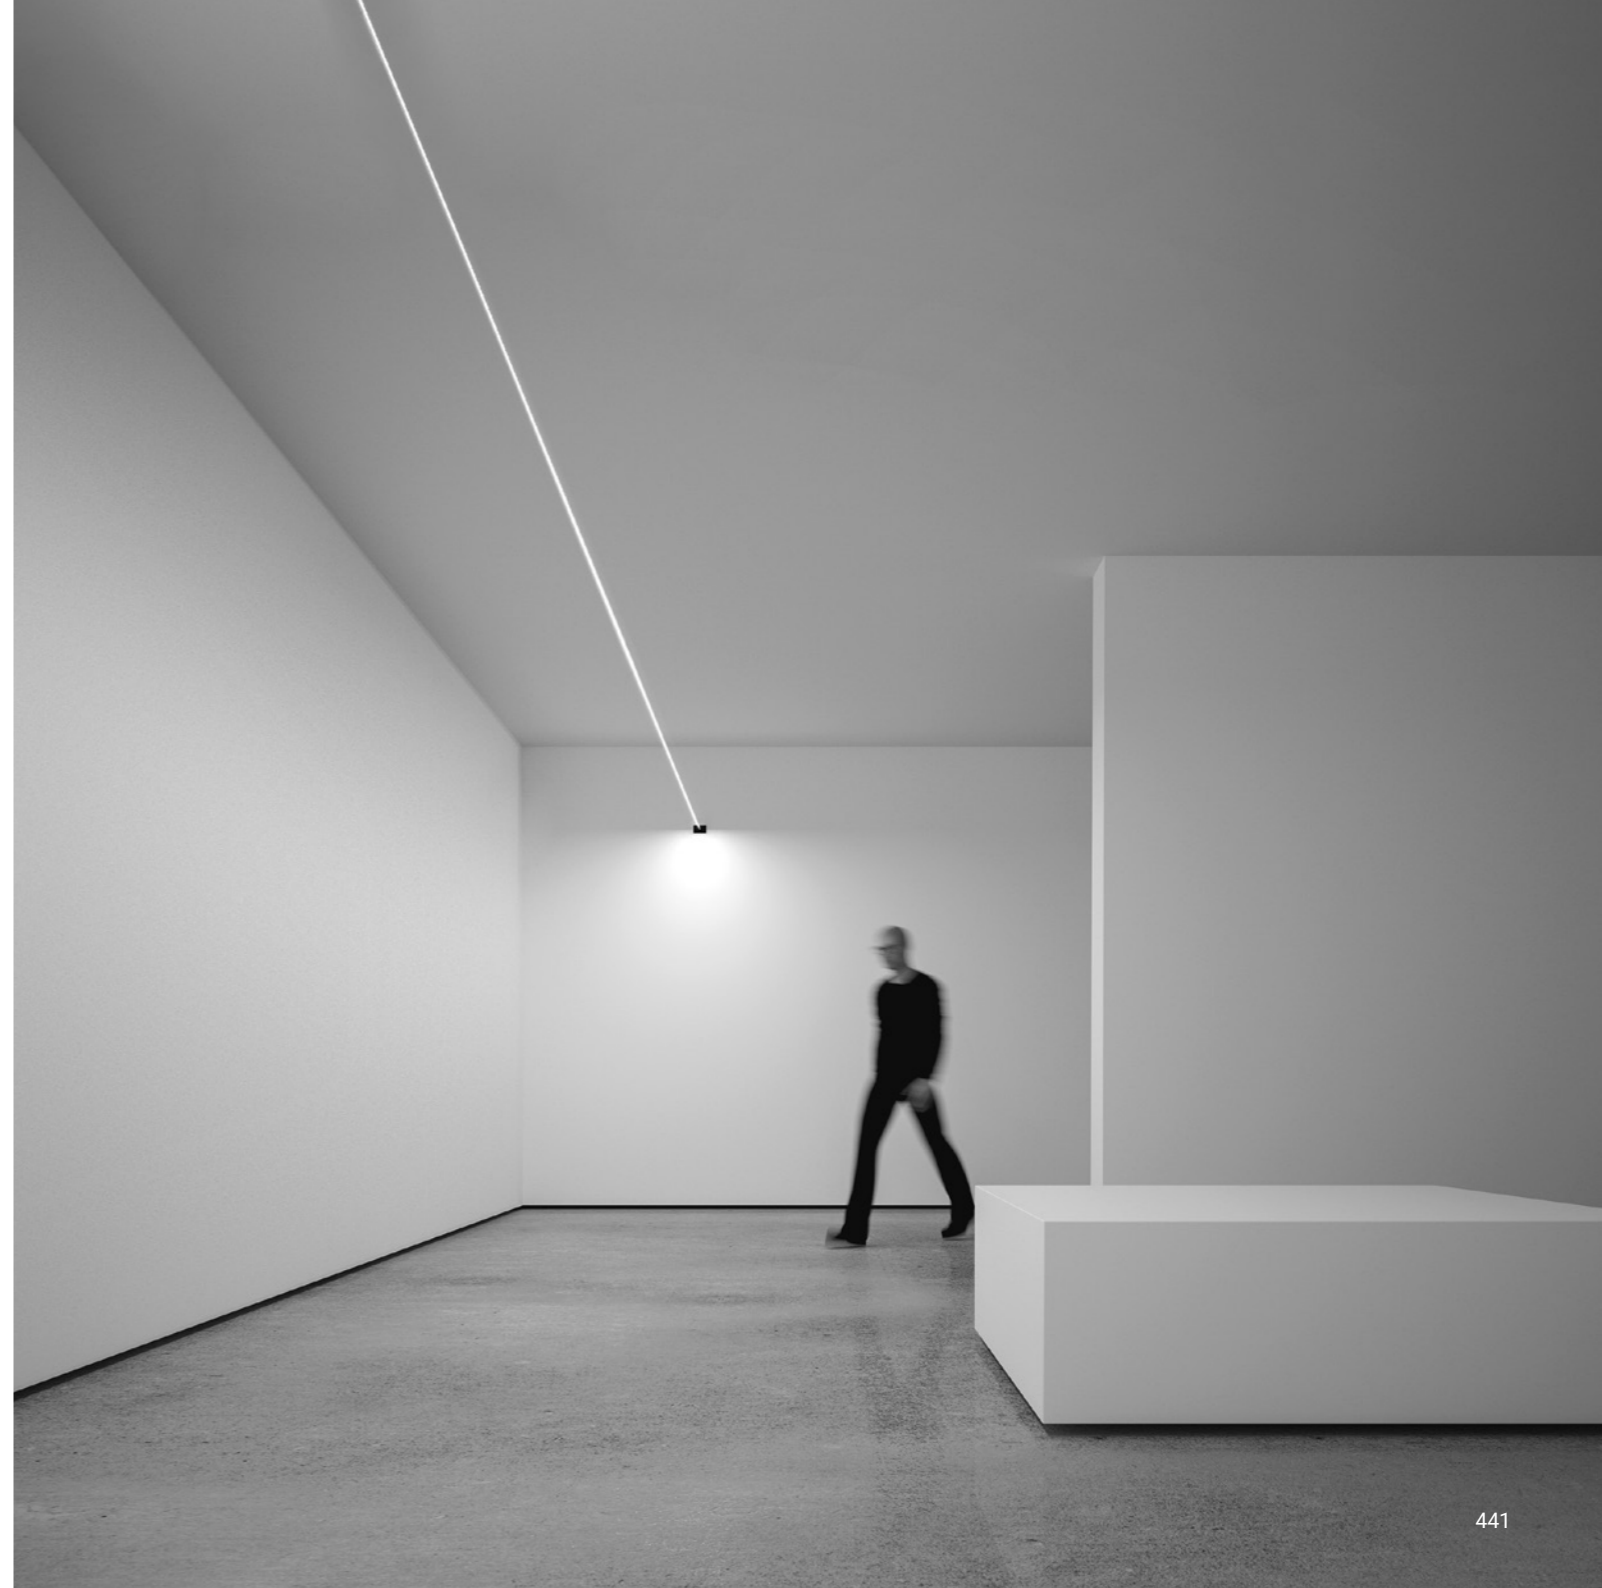


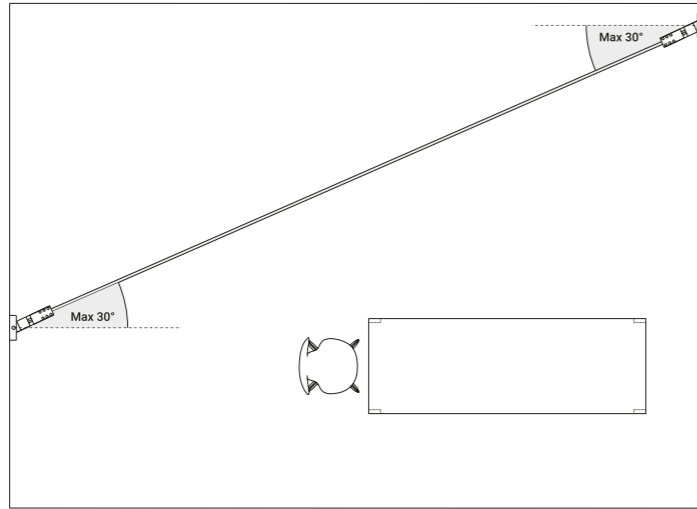


Example of installation with max rotation 30°

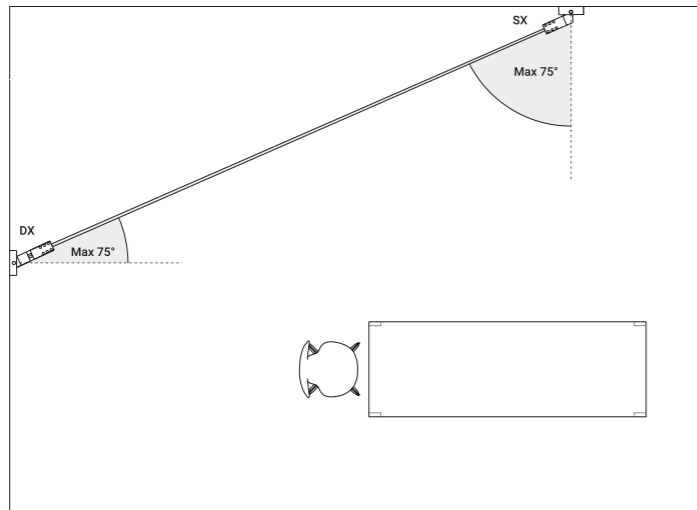

1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°

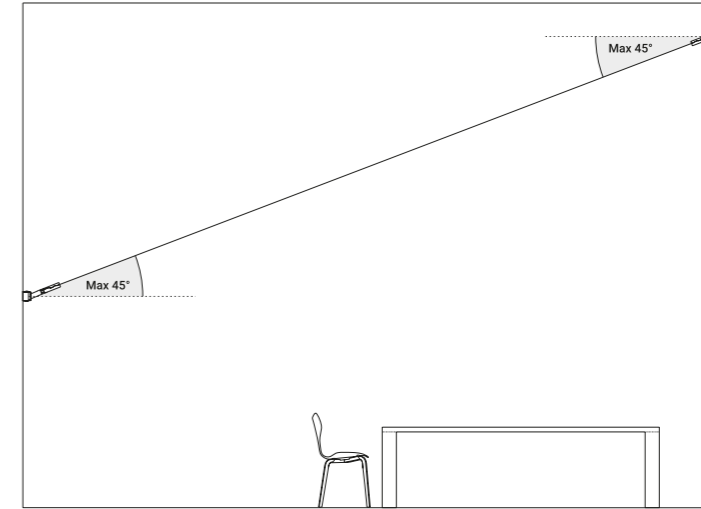

1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°

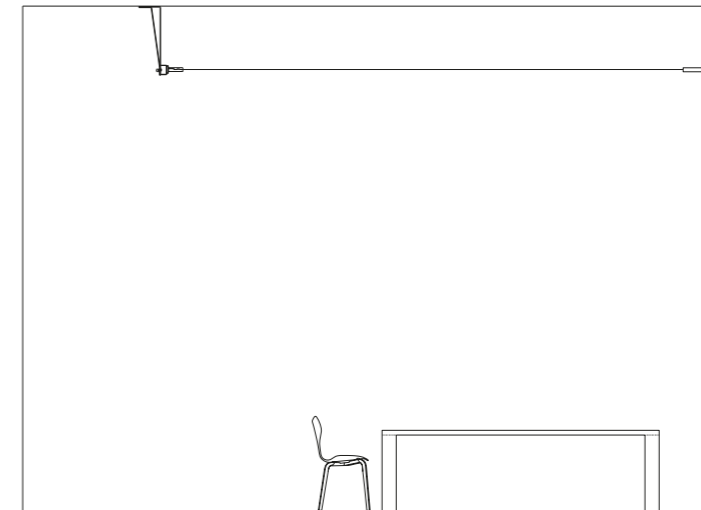

1A0080400.00.00 - Example of installation with ceiling installation kit



INFINITO


Davide Groppi / 2016

A spatial concept, it is continuous light. An ultra-thin strip of special stainless steel just 18 mm wide "cuts" the space to produce indirect light. Infinito can be adapted to various situations, stretched from wall to wall or ceiling to floor. It comes in strips up to 36 metres in length (standard versions at 6 / 12 / 18 metres in length). Infinito breaks down the luminaire, turning it into something else, leaving only a trace, a line and then not even that, just light. This project pays homage to the art of Lucio Fontana and his spatial concepts. The graphic force of this system is surprising. It can be integrated into space, but at the same time it becomes part of that space. Infinito: essence and absence. Luminaire designed also to be powered by ENDLESS system.


Archiproducts Design Award 2017

People's Choice AZ Award 2017

How to order - INFINITO 6

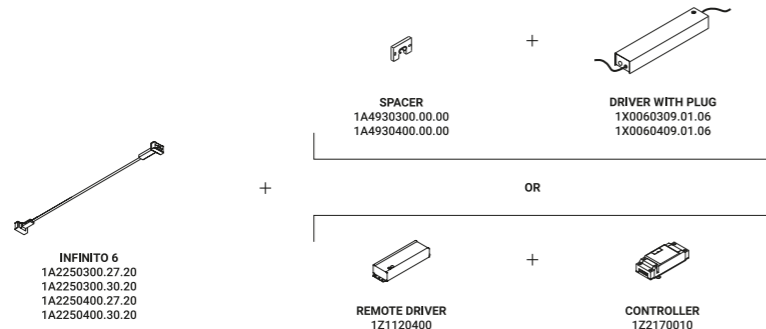

How to order - INFINITO 12

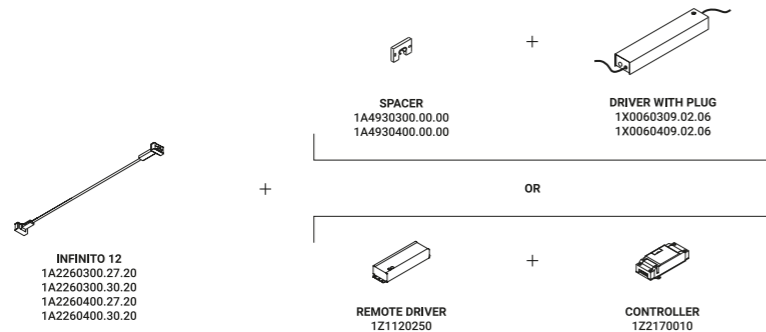

How to order - INFINITO 18




Wall-Systems / Indirect / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black


Note Special stainless steel tape (18 mm) stretched from wall to wall. Available in 6 / 12 / 18 m with a single power unit and uniform lighting. Available in Tunable White (TW - 5 / 10 m) version. LED strip that can be divided every 96,6 mm. INFINITO 6 and INFINITO 12: possibility for the luminaires to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

	<p>INFINITO 6 57W - 1,48A 48V DC 2700K - 6576lm / 3000K - 6708lm CRI >90 Driver not included CE IP20 E</p>	<p>Matt White - 2700K Matt White - 3000K Matt Black - 2700K Matt Black - 3000K</p>	<p>1A2250300.27.20 1A2250300.30.20 1A2250400.27.20 1A2250400.30.20</p>
	<p>INFINITO 12 114W - 2,61A 48V DC 2700K - 13152lm / 3000K - 13416lm CRI >90 Driver not included CE IP20 E</p>	<p>Matt White - 2700K Matt White - 3000K Matt Black - 2700K Matt Black - 3000K</p>	<p>1A2260300.27.20 1A2260300.30.20 1A2260400.27.20 1A2260400.30.20</p>
	<p>INFINITO 18 171W 48V DC 2700K - 19728lm / 3000K - 20124lm CRI >90 Driver not included CE IP20 E</p>	<p>Matt White - 2700K Matt White - 3000K Matt Black - 2700K Matt Black - 3000K</p>	<p>1A2270300.27.20 1A2270300.30.20 1A2270400.27.20 1A2270400.30.20</p>


How to order -
INFINITO 5 TW

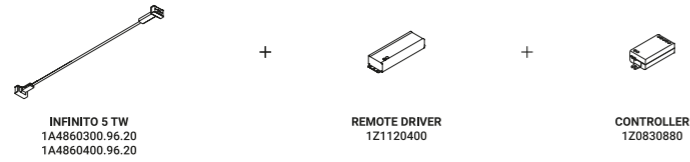

How to order -
INFINITO 10 TW

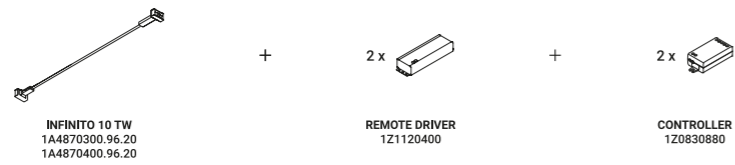


Note Tunable White describes the variable colour temperature controls from warm white to cool white light.

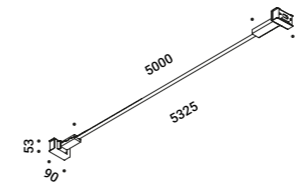

INFINITO 5 TW
Tunable White
50W
24V DC
2700K / 6500K - 7650lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K / 6500K
Matt Black - 2700K / 6500K

1A4860300.96.20
1A4860400.96.20

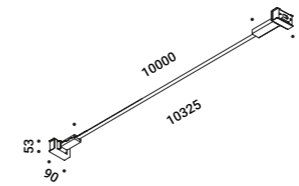








INFINITO 10 TW
Tunable White
100W
24V DC
2700K / 6500K - 15300lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K / 6500K
Matt Black - 2700K / 6500K

1A4870300.96.20
1A4870400.96.20







Compulsory accessories


Drivers

	Driver with plug			Not included
	Matt White	Input 100-240V - 50/60Hz Output 48V - Max 57W - IP20 Dimmer on board	INFINITO 6	1X0060309.01.06
	Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 57W - IP20 Dimmer on board	INFINITO 6	1X0060409.01.06
	Driver with plug			Not included
	Matt White	Input 100-240V - 50/60Hz Output 48V - Max 114W - IP20 Dimmer on board	INFINITO 12	1X0060309.02.06
	Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 114W - IP20 Dimmer on board	INFINITO 12	1X0060409.02.06
	Driver			Not included
	100-240V	48V/80W/IP67/1-10V	INFINITO 6 / INFINITO 5 TW	1Z1120400
	Driver			Not included
	100-240V	48V/150W/IP67/1-10V	INFINITO 12 / INFINITO 10 TW	1Z1120250
	Driver			Not included
	100-240V	48V/240W/IP67/1-10V	INFINITO 18	1Z1120390
	Controller			Not included
		DALI - PUSH - 0/1-10V - TRIAC - IP20	INFINITO 6 / INFINITO 12 / INFINITO 18	1Z2170010
	Controller Casambi - Tunable White			Not included
			INFINITO 5 TW / INFINITO 10 TW	1Z0830880


Optional accessories

Installation kits

	Spacer			Not included
	Matt White	For driver kit with plug	INFINITO 6 / INFINITO 12	1A4930300.00.00
	Matt Black	For driver kit with plug	INFINITO 6 / INFINITO 12	1A4930400.00.00
	Ceiling installation kit			Not included
	Matt Black			1A0080400.00.00
	Kit wall connection vertical sloped 45°			Not included
	Matt Black			1A0120400.00.00
	Kit wall connection sloped right 75°			Not included
	Matt Black			1A0340400.00.00
	Kit wall connection sloped left 75°			Not included
	Matt Black			1A0350400.00.00
	Swallows			Not included
	Matt Black			1A0290400.00.00

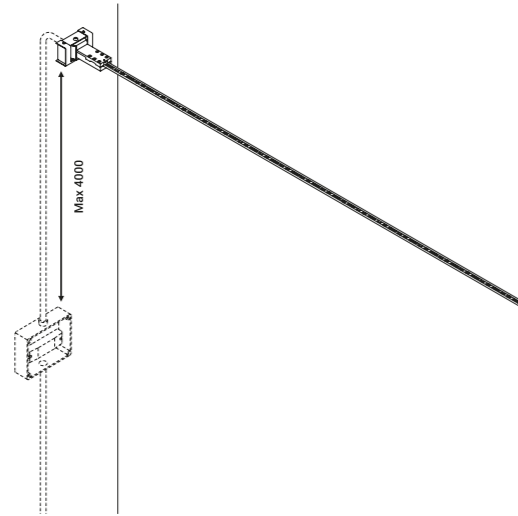


Example of installation with remote driver

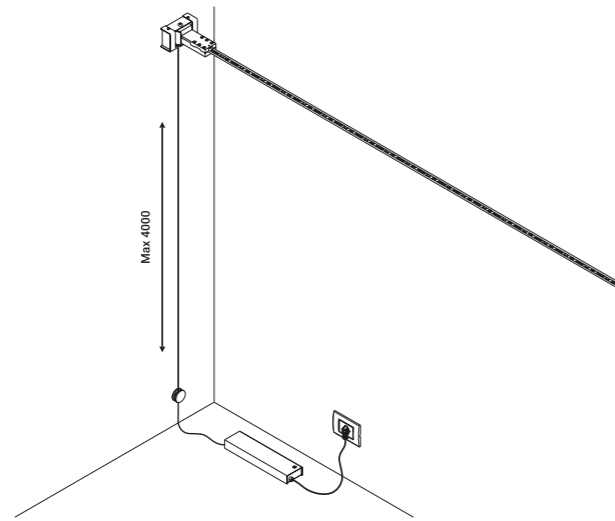


Example of installation with driver with plug




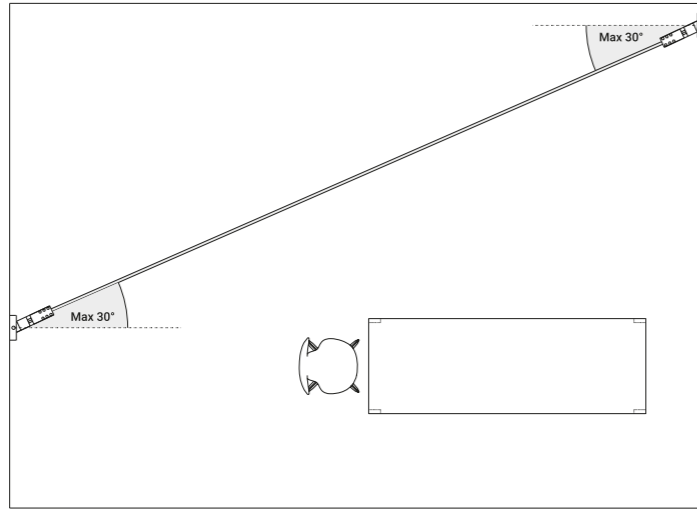


Example of installation with max rotation 30°

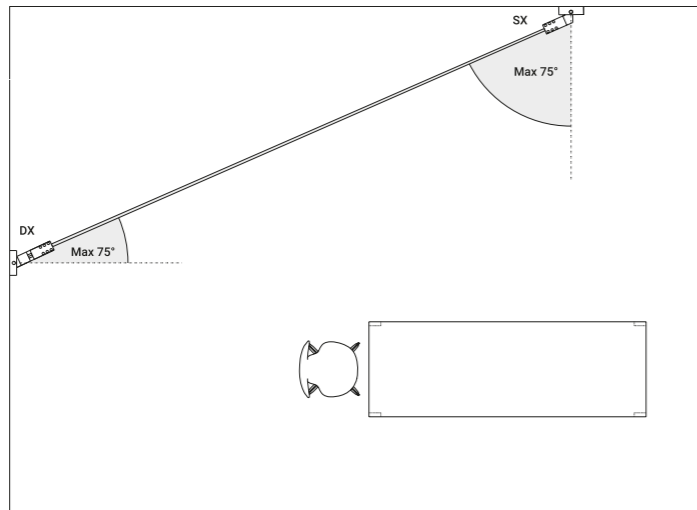


1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°

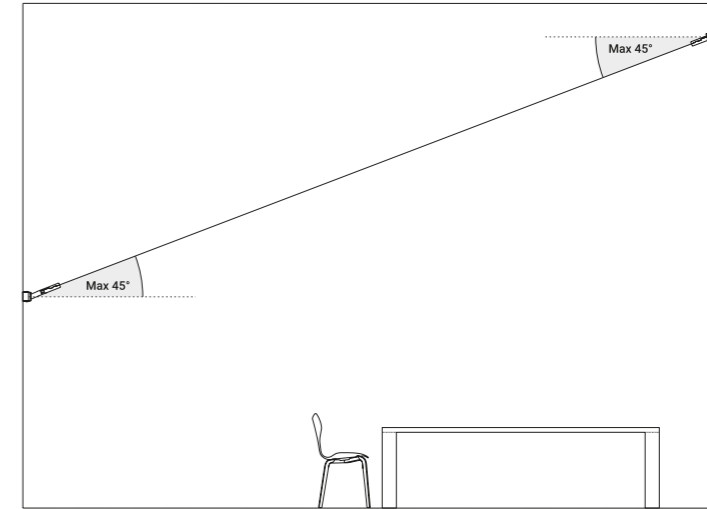

1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°

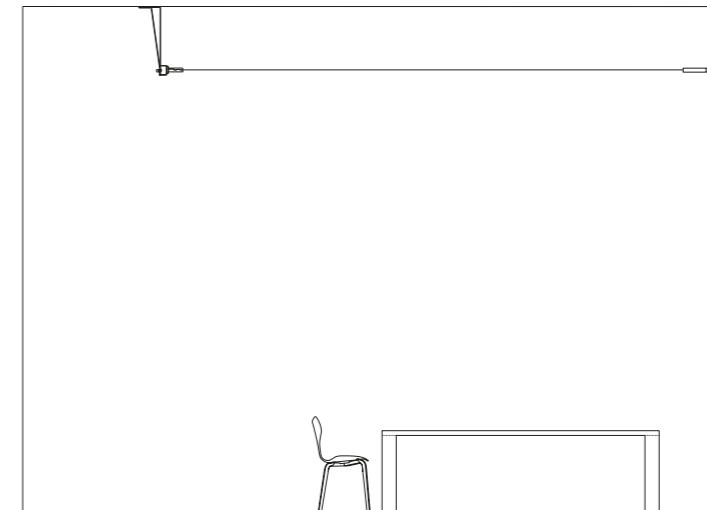

1A0080400.00.00 - Example of installation with ceiling installation kit

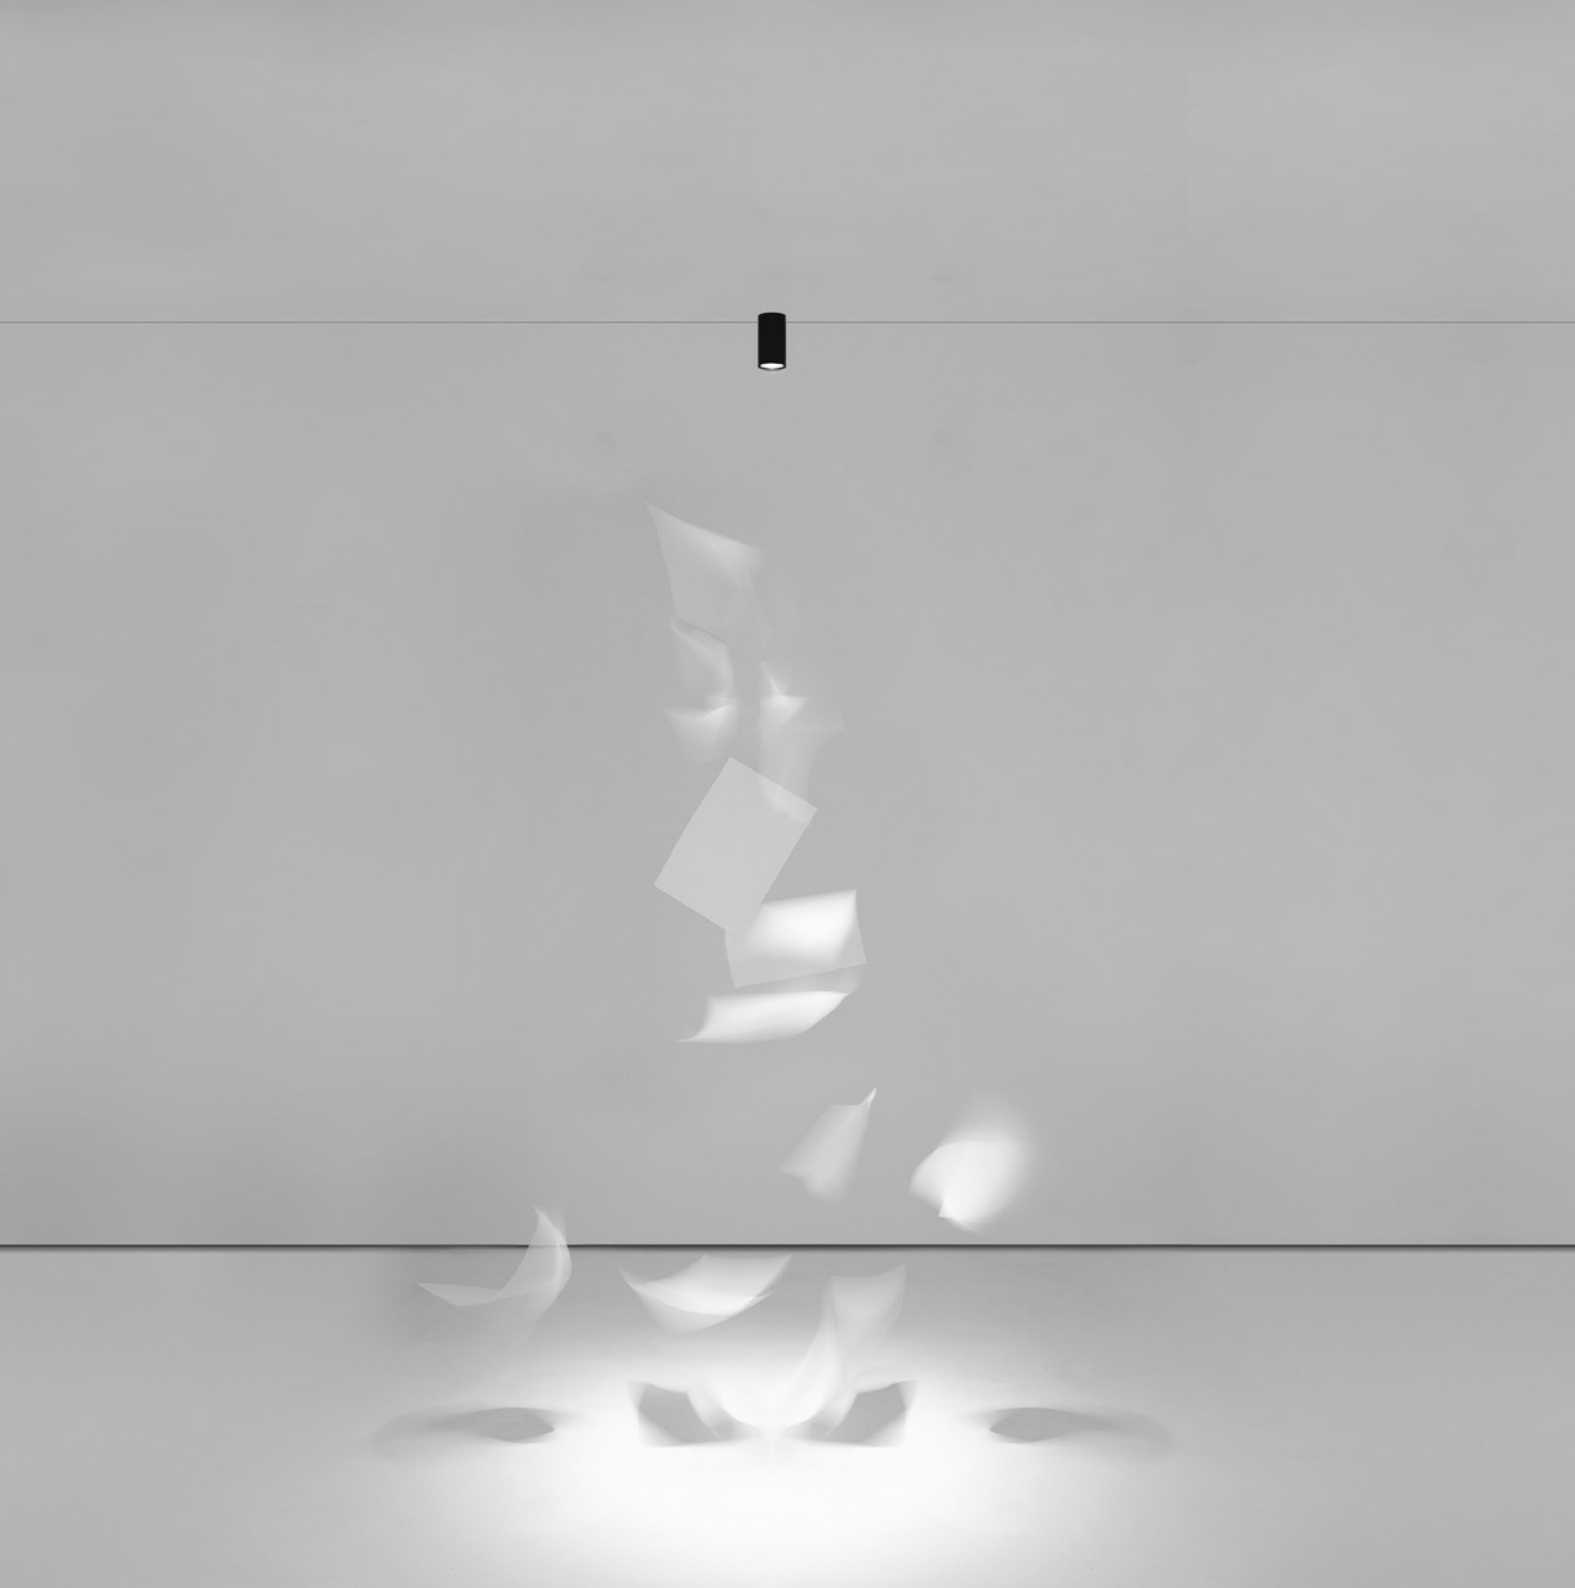

Light runs on a wire. An almost imperceptible wire, suspended in space.

Like a tightrope walker on a thin rope, the light reaches everywhere, weightless and wonderful. Ohm is an electro mechanic project that takes maximum advantage of the characteristics of luminous diodes.

Its secret is a special unipolar wire stretched from wall to wall.

Where the light comes from is discreetly hidden,



giving all the attention to what it is illuminating.

It is possible to replace the light source even with the luminaire assembled.



Luminaire designed also to be powered by ENDLESS conductive tape.

Selection for ADI Design Index 2020

Remote driver version

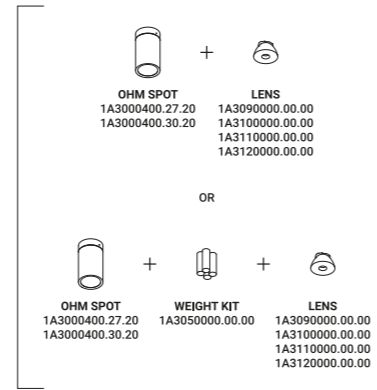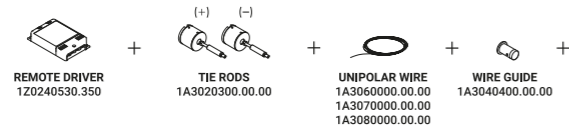


Wall/ceiling driver version

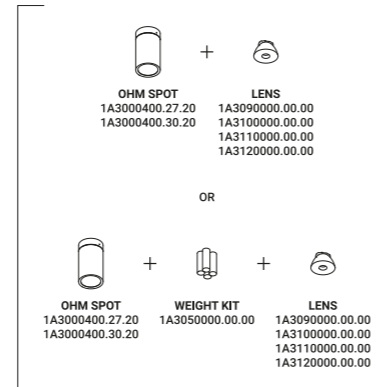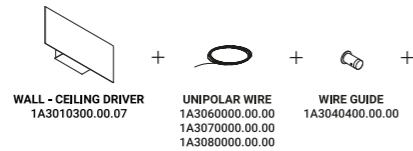

Systems / Direct / Indoor

Material Metal - PA
Finish .04 Matt Black

Note Special unipolar wire stretched from wall to wall. Max 4 Spots. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.




OHM SPOT
 3,2W
 Max 350mA DC
 2700K / 3000K
 CRI >95
 Driver not included
 CE IP20

Matt Black - 2700K
 Matt Black - 3000K

1A3000400.27.20
 1A3000400.30.20

Compulsory accessories

Installation kits



Tie rods			Not included
Matt White	2 Pieces	1A3020300.00.00	




Unipolar wire - 12 m			Not included
	Max 60V DC	1A3060000.00.00	


Unipolar wire - 24 m			Not included
	Max 60V DC	1A3070000.00.00	

Unipolar wire - 48 m			Not included
	Max 60V DC	1A3080000.00.00	

Drivers




Driver			Not included
220-240V(100-127V)	350mA/18W(18W)/IP20/DALI - PUSH - 1-10V	1Z0240530.350	



Wall/ceiling driver			Not included
Matt White	Input 100-240V - 50/60Hz Output 350mA - 18,5W - IP20 DALI - PUSH - 1-10V	1A3010300.00.07	


Other accessories



Lens			Not included
Beam - 14°	2700K - CRI >95 - 272lm	OHM SPOT	1A3090000.00.00
	3000K - CRI >95 - 288lm		
Beam - 24°	2700K - CRI >95 - 271lm	OHM SPOT	1A3100000.00.00
	3000K - CRI >95 - 286lm		
Beam - 36°	2700K - CRI >95 - 257lm	OHM SPOT	1A3110000.00.00
	3000K - CRI >95 - 273lm		
Beam - 50°	2700K - CRI >95 - 254lm	OHM SPOT	1A3120000.00.00
	3000K - CRI >95 - 270lm		

Optional accessories

Installation kits




Wall adapter plate			Not included
Matt White	For mounting on brick masonry walls	1A3030300.00.00	




Wire guide			Not included
Matt Black	1 Piece	1A3040400.00.00	




Weight kit for suspension version			Not included
	4 Pieces	1A3050000.00.00	




Power base for Endless			Not included
Matt White		1A3940300.00.00	
Matt Black		1A3940400.00.00	

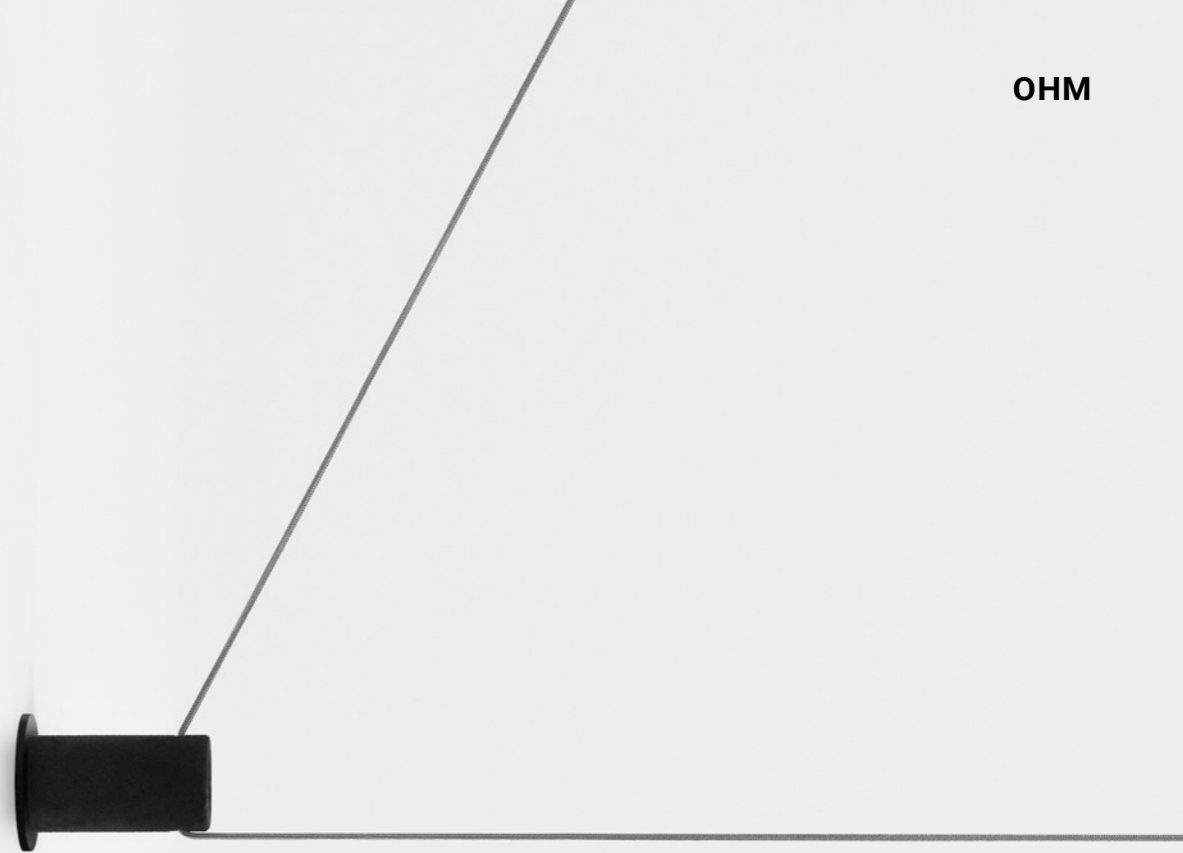


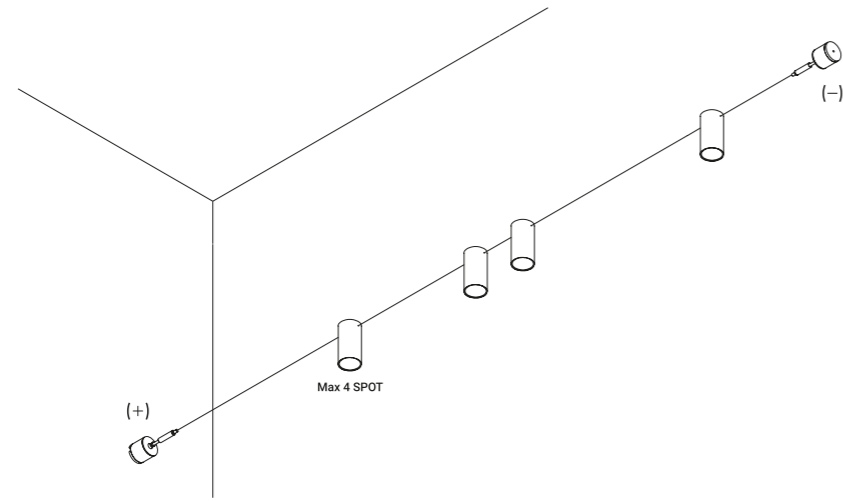

Remote driver version

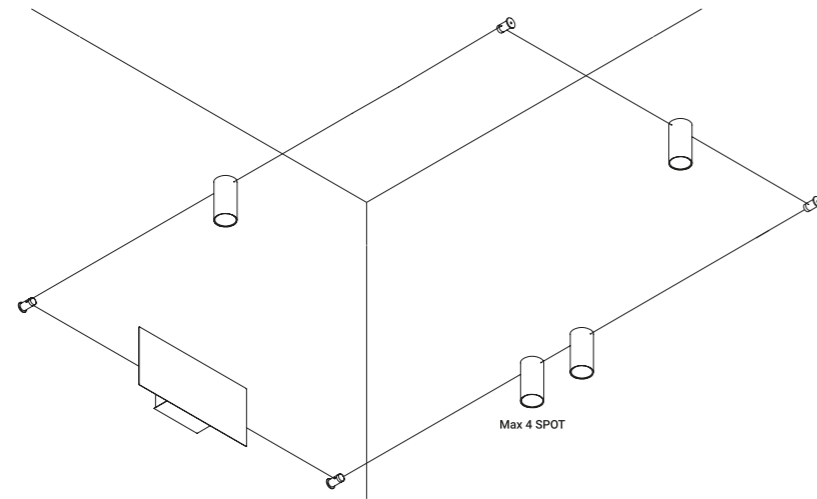

Wall/ceiling driver version

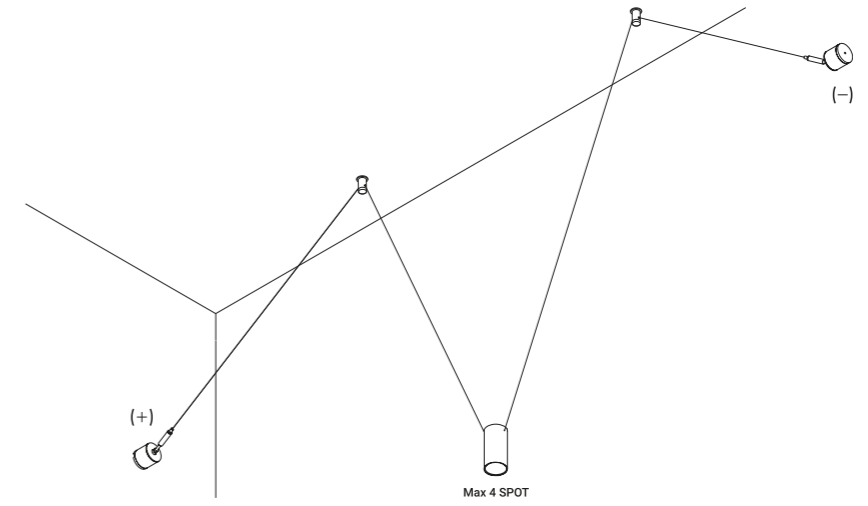

Suspension version




Utopia is a project on the limit state of light,
the research for the minimum dimension necessary for pure and essential lighting.
It represents full flexibility, in both its design and its light control.
The light strip reaches into space, bending,
breaking and drawing abstract, mysterious patterns.
Luminaire designed also to be powered by ENDLESS conductive tape.

Systems / Indirect / Indoor

Material Metal - PVC
Finish .00 Standard

Note Special stainless steel and rubber profile stretched from wall to wall. Available in 6 / 12 m with a single power unit and uniform lighting. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

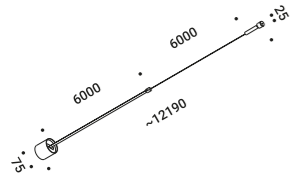


UTOPIA 6

79W
 24V DC
 2700K - 6079lm / 3000K - 6322lm
 CRI >90
 Driver not included



Standard - 2700K
 Standard - 3000K

1A4250000.27.20
 1A4250000.30.20

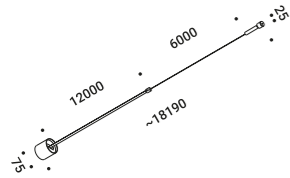

UTOPIA 12

125W
 24V DC
 2700K - 10133lm / 3000K - 10538lm
 CRI >90
 Driver not included




Standard - 2700K
 Standard - 3000K


1A4600000.27.20
 1A4600000.30.20

Compulsory accessories


Drivers



Driver				Not included
100-240V	24V/96W/IP67/1-10V	UTOPIA 6	1Z1120540	



Driver				Not included
100-240V	24V/150W/IP67/1-10V	UTOPIA 12	1Z1120500	



Controller				Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20		1Z2170010	

Optional accessories


Installation kits




Accessory 1				Not included
Polished Chrome			1A4480100.00.00	



Accessory 2				Not included
Polished Chrome			1A4490100.00.00	

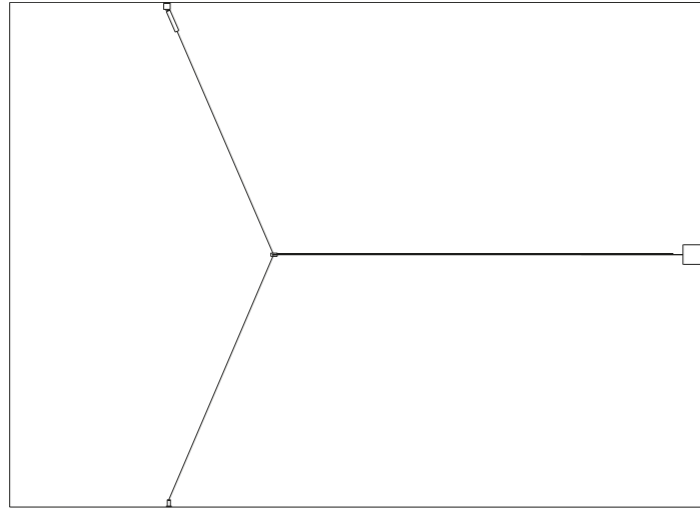

1A4480100.00.00 - Example of installation with accessory 1

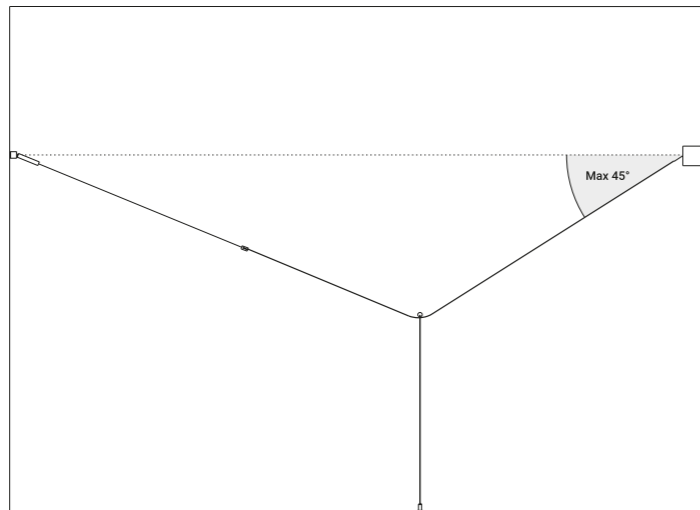

1A4490100.00.00 - Example of installation with accessory 2



TRACKS - PROFILES


BINARIO TRIFASE

/ 2007




Pure line in space.
Our track holds the models Dot, Mira and Spot.

Power right connector and power left connector installation

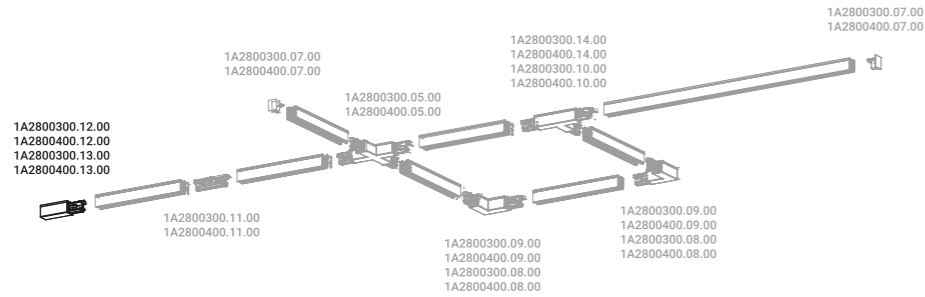

Power intermediate connector installation

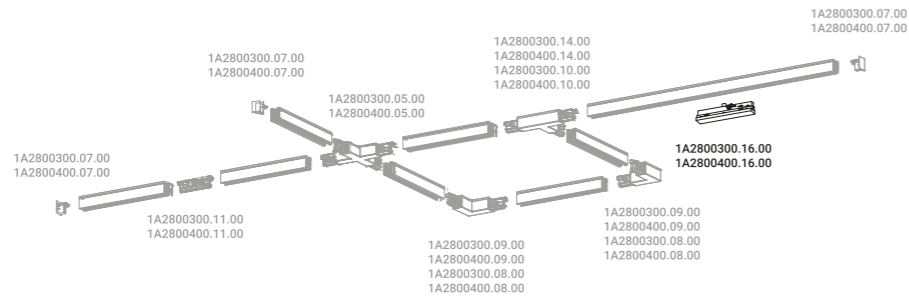

Systems / Direct / Indoor


Material Metal - Polycarbonate

Finish .03 Matt White .04 Matt Black

Note Ceiling and wall track system.

Compulsory accessories

Installation kits



Track 1 m		Not included
Matt White	1A2800300.01.00	
Matt Black	1A2800400.01.00	

Track 2 m		Not included
Matt White	1A2800300.02.00	
Matt Black	1A2800400.02.00	

Track 3 m		Not included
Matt White	1A2800300.03.00	
Matt Black	1A2800400.03.00	



End cap		Not included
Matt White	1A2800300.07.00	
Matt Black	1A2800400.07.00	

Drivers



Power right connector		Not included
Matt White	1A2800300.13.00	
Matt Black	1A2800400.13.00	



Power left connector		Not included
Matt White	1A2800300.12.00	
Matt Black	1A2800400.12.00	



Power intermediate connector		Not included
Matt White	1A2800300.16.00	
Matt Black	1A2800400.16.00	

Optional accessories

Installation kits



Linear connector		Not included
Matt White	1A2800300.11.00	
Matt Black	1A2800400.11.00	



Internal L connector		Not included
Matt White	1A2800300.09.00	
Matt Black	1A2800400.09.00	



External L connector		Not included
Matt White	1A2800300.08.00	
Matt Black	1A2800400.08.00	



Right T connector		Not included
Matt White	1A2800300.14.00	
Matt Black	1A2800400.14.00	



Left T connector		Not included
Matt White	1A2800300.10.00	
Matt Black	1A2800400.10.00	




X connector		Not included
Matt White	1A2800300.15.00	
Matt Black	1A2800400.15.00	



Adjustable suspension cable		Not included
Length 1500 mm	1A2800000.04.00	

Adjustable suspension cable		Not included
Length 3000 mm	1A2800000.05.00	

Adjustable suspension cable		Not included
Length 5000 mm	1A2800000.06.00	




Cutting tool		Not included
	1A2800300.17.00	



Compulsory accessories

Luminaires




DOT BINARIO

13W
220-240V - 50/60Hz
2700K / 3000K
CRI >97
Driver integrated
DALI

CE IP20

Matt White - 2700K - DALI
Matt White - 3000K - DALI
Matt Black - 2700K - DALI
Matt Black - 3000K - DALI

1A2290300.27.01
1A2290300.30.01
1A2290400.27.01
1A2290400.30.01




DOT BINARIO 51

Max 10W
100-240V - 50/60Hz
ON/OFF
Bulb not included

CE IP20

Matt White - ON/OFF
Matt Black - ON/OFF

1A3710300.00.00
1A3710400.00.00




MIRA BINARIO

8W
220-240V - 50/60Hz
2700K - 327lm / 3000K - 352lm
CRI >90
Driver integrated
DALI

CE IP20

Matt White - 2700K - DALI
Matt White - 3000K - DALI
Matt Black - 2700K - DALI
Matt Black - 3000K - DALI

1A0490300.27.01
1A0490300.30.01
1A0490400.27.01
1A0490400.30.01



SPOT BINARIO

21W
220-240V - 50/60Hz
CRI >90
Driver integrated
DALI
LED Module not included

CE IP20

Matt White - DALI
Matt Black - DALI


1A0280300.00.01
1A0280400.00.01

Other accessories




Lens		Not included	
Beam - 14°	2700K - CRI >97 - 983lm	DOT BINARIO	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
Beam - 24°	2700K - CRI >97 - 943lm	DOT BINARIO	1A3100000.00.00
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 955lm	DOT BINARIO	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
Beam - 50°	2700K - CRI >97 - 965lm	DOT BINARIO	1A3120000.00.00
	3000K - CRI >97 - 1016lm		


LED modules



DG111 LED module		Not included	
16,7W - 15° - 500mA DC 2700K - 1648lm - CRI >90 Energy Efficiency F - Dimmable	SPOT BINARIO	1A4700000.27.20	
	16,7W - 15° - 500mA DC 3000K - 1682lm - CRI >90 Energy Efficiency F - Dimmable		1A4700000.30.20



DG111 LED module		Not included	
16,7W - 22° - 500mA DC 2700K - 1859lm - CRI >90 Energy Efficiency F - Dimmable	SPOT BINARIO	1A3890000.27.20	
	16,7W - 22° - 500mA DC 3000K - 1945lm - CRI >90 Energy Efficiency F - Dimmable		1A3890000.30.20




DG111 LED module		Not included	
16,7W - 36° - 500mA DC 2700K - 1808lm - CRI >90 Energy Efficiency F - Dimmable	SPOT BINARIO	1A3900000.27.20	
	16,7W - 36° - 500mA DC 3000K - 1890lm - CRI >90 Energy Efficiency F - Dimmable		1A3900000.30.20

Optional accessories


Other accessories




Accessory holder + Honeycomb louvre		Not included	
	DOT BINARIO	1X0080400.01.00	




Elliptical filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.02.00



Blue filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.03.00



Red filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.04.00



Yellow filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.05.00

Optional accessories

Bulbs



LED - GU10 - PAR16			Not included
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y0330500




LED SORAA - GU10 - MR16			Not included
	230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y1580210




LED SORAA - GU10 - MR16			Not included
	230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y1580010


Other accessories



Darklight			Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580040




25° beam filter			Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580020




36° beam filter			Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580030


Optional accessories




Accessory holder + Soft filter + Honeycomb louvre			Not included
Matt Black	SPOT BINARIO	1X0070400.04.00	




Accessory holder + Elliptical filter			Not included
Matt Black	SPOT BINARIO	1X0070400.05.00	




Blue filter			Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	SPOT BINARIO	1X0070000.06.00




Red filter			Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	SPOT BINARIO	1X0070000.07.00



Yellow filter			Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	SPOT BINARIO	1X0070000.08.00



Horizontal directional fins			Not included
Matt Black	SPOT BINARIO	1X0070400.01.00	



Cylindrical screen			Not included
Matt Black	SPOT BINARIO	1X0070400.02.00	




Cone 45°			Not included
Matt Black	SPOT BINARIO	1X0070400.03.00	






A minimal track system with tiny lights, small hummingbirds that perch where needed.
Luminaire designed also to be powered by ENDLESS system.

Layout example of wall and ceiling version

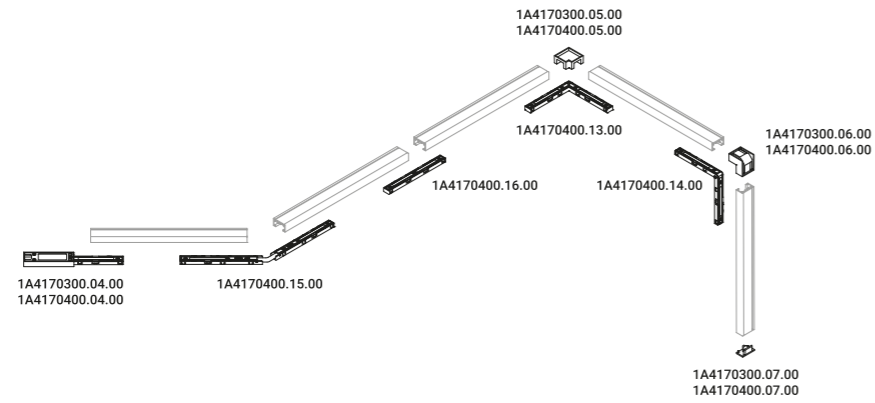

Layout example of recessed version

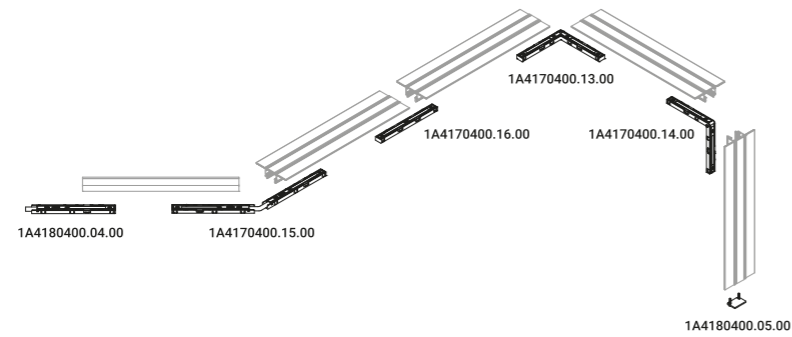

Systems / Direct / Indoor

Material


Finish .04 Matt Black

Note

Ceiling and wall track system operating at 48V DC. Possibility for the luminaire to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

Compulsory accessories

Installation kits for wall and ceiling track




Wall and ceiling track - 1 m		Not included
Matt White	1A4170300.01.00	
Matt Black	1A4170400.01.00	

Wall and ceiling track - 2 m		Not included
Matt White	1A4170300.02.00	
Matt Black	1A4170400.02.00	

Wall and ceiling track - 3 m		Not included
Matt White	1A4170300.03.00	
Matt Black	1A4170400.03.00	

Power connector		Not included
Matt White	1A4170300.04.00	
Matt Black	1A4170400.04.00	




End cap		Not included
Matt White	1A4170300.07.00	
Matt Black	1A4170400.07.00	



Compulsory accessories


Installation kits for recessed track



Recessed wall and ceiling track - 1 m	Not included
Matt Black	1A4180400.01.00

Recessed wall and ceiling track - 2 m	Not included
Matt Black	1A4180400.02.00

Recessed wall and ceiling track - 3 m	Not included
Matt Black	1A4180400.03.00




Power connector	Not included
Matt Black For recessed track	1A4180400.04.00




End cap	Not included
Matt Black For recessed track	1A4180400.05.00

Drivers

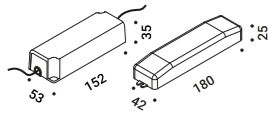

Driver	Not included
Input 100-240V - 50/60Hz Output 48V - 60W - IP20 - DALI	1A4170000.19.00

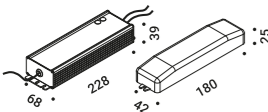

Driver	Not included
Input 100-240V - 50/60Hz Output 48V - 150W - IP20 - DALI	1A2810000.11.00



Optional accessories


Installation kits for wall and ceiling track




Corner joint cover H		Not included
Matt White	For wall and ceiling track	1A4170300.05.00
Matt Black	For wall and ceiling track	1A4170400.05.00



Corner joint cover V		Not included
Matt White	For wall and ceiling track	1A4170300.06.00
Matt Black	For wall and ceiling track	1A4170400.06.00




Cover - 3 m		Not included
Matt White	For wall and ceiling track	1A4170300.08.00
Matt Black	For wall and ceiling track	1A4170400.08.00



Endless connector		Not included
Standard	For wall and ceiling track	1A4170000.20.00

Installation kits for recessed track




Cover - 3 m		Not included
Matt White	For recessed track	1A4180300.08.00
Matt Black	For recessed track	1A4180400.08.00




Template		Not included
Standard	For recessed track	1A4180000.09.00

Optional accessories


Installation kits



L connector		Not included
Matt Black		1A4170400.13.00



Ceiling-wall connector		Not included
Matt Black		1A4170400.14.00



Flexible joint		Not included
Matt Black		1A4170400.15.00




Linear connector		Not included
Matt Black		1A4170400.16.00



Locking tool		Not included
Standard		1A4170000.17.00

Compulsory accessories


Luminaires



COLIBRÌ 18 - 15°
 2W - 0,07A
 48V DC
 2700K - 81lm / 3000K - 84lm
 CRI >90
 Beam 15°
 Driver integrated
 DALI
 CE IP20 E

Matt Black - 2700K - DALI
 Matt Black - 3000K - DALI


1A4260400.27.01
 1A4260400.30.01



COLIBRÌ 18 - 25°
 2W - 0,07A
 48V DC
 2700K - 79lm / 3000K - 81lm
 CRI >90
 Beam 25°
 Driver integrated
 DALI
 CE IP20 E

Matt Black - 2700K - DALI
 Matt Black - 3000K - DALI


1A4270400.27.01
 1A4270400.30.01



COLIBRÌ 28 - 15°
 4W - 0,14A
 48V DC
 2700K - 147lm / 3000K - 151lm
 CRI >90
 Beam 15°
 Driver integrated
 DALI
 CE IP20 E

Matt Black - 2700K - DALI
 Matt Black - 3000K - DALI

1A4280400.27.01
 1A4280400.30.01



COLIBRÌ 28 - 25°
 5W - 0,14A
 48V DC
 2700K - 250lm / 3000K - 258lm
 CRI >90
 Beam 25°
 Driver integrated
 DALI
 CE IP20 E

Matt Black - 2700K - DALI
 Matt Black - 3000K - DALI

1A4290400.27.01
 1A4290400.30.01


FRAMELESS

/ 2016



Plasterboard track for recessed installation.
It is designed for use with state-of-the-art LED modules
to create a wide range of light beams.

Layout example

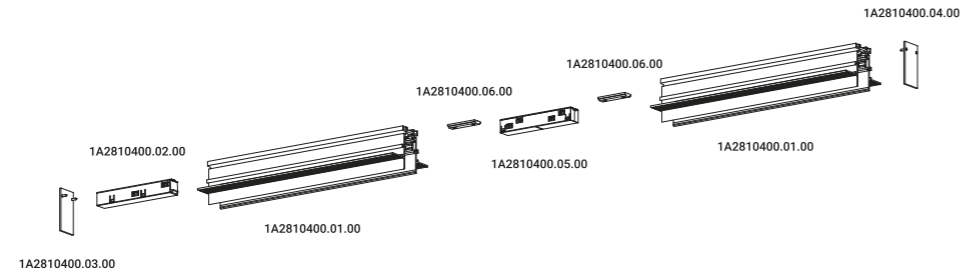

Systems / Direct / Indoor


Material Metal - Polycarbonate

Finish .03 Matt White .04 Matt Black

Note Recessed track system operating at 48V DC.

Compulsory accessories

Installation kits



Plasterboard track 12,5 mm		Not included
Matt Black	48V DC - Max 15A Length 2000 mm Cut-out 2000x26 mm	1A2810400.01.00



Power connector		Not included
Matt Black	Output 48V - Max 15A	1A2810400.02.00







End cap for power connector		Not included
Matt Black		1A2810400.03.00



End cap		Not included
Matt Black		1A2810400.04.00





Compulsory accessories

Drivers

	Driver	Not included
100-240V	48V/150W/IP67/1-10V	1Z1120250
	Driver	Not included
100-240V	48V/320W/IP67/1-10V	1Z1120380
	Driver	Not included
	Input 100-240V - 50/60Hz Output 48V - 150W - IP20 - DALI	1A2810000.11.00
	Driver	Not included
	Input 100-240V - 50/60Hz Output 48V - 320W - IP20 - DALI	1A2810000.12.00


Optional accessories

Installation kits

	Linear connector	Not included
Matt Black	Output 48V - Max 15A	1A2810400.05.00
	Reinforcing bracket	Not included
Matt Black		1A2810400.06.00
	Clamp with M6 grippe	Not included
		1A2810000.07.00
	Suspension set	Not included
		1A2810000.08.00
	Plaster installation guard	Not included
	Length 2000 mm	1A2810000.09.00
	Cutting tool	Not included
		1A2810000.10.00

Compulsory accessories

Luminaires



DOT FRAMELESS

13W
48V DC
2700K / 3000K
CRI >97
Driver integrated
DALI



Matt White - 2700K - DALI
Matt White - 3000K - DALI
Matt Black - 2700K - DALI
Matt Black - 3000K - DALI

1A0090300.27.01
1A0090300.30.01
1A0090400.27.01
1A0090400.30.01


Other accessories




Lens		Not included	
Beam - 14°	2700K - CRI >97 - 983lm	DOT FRAMELESS	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
Beam - 24°	2700K - CRI >97 - 943lm	DOT FRAMELESS	1A3100000.00.00
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 955lm	DOT FRAMELESS	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
Beam - 50°	2700K - CRI >97 - 965lm	DOT FRAMELESS	1A3120000.00.00
	3000K - CRI >97 - 1016lm		

Optional accessories


Other accessories




Accessory holder + Honeycomb louvre		Not included	
	DOT FRAMELESS		1X0080400.01.00




Elliptical filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.02.00




Blue filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.03.00



Red filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.04.00



Yellow filter		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.05.00

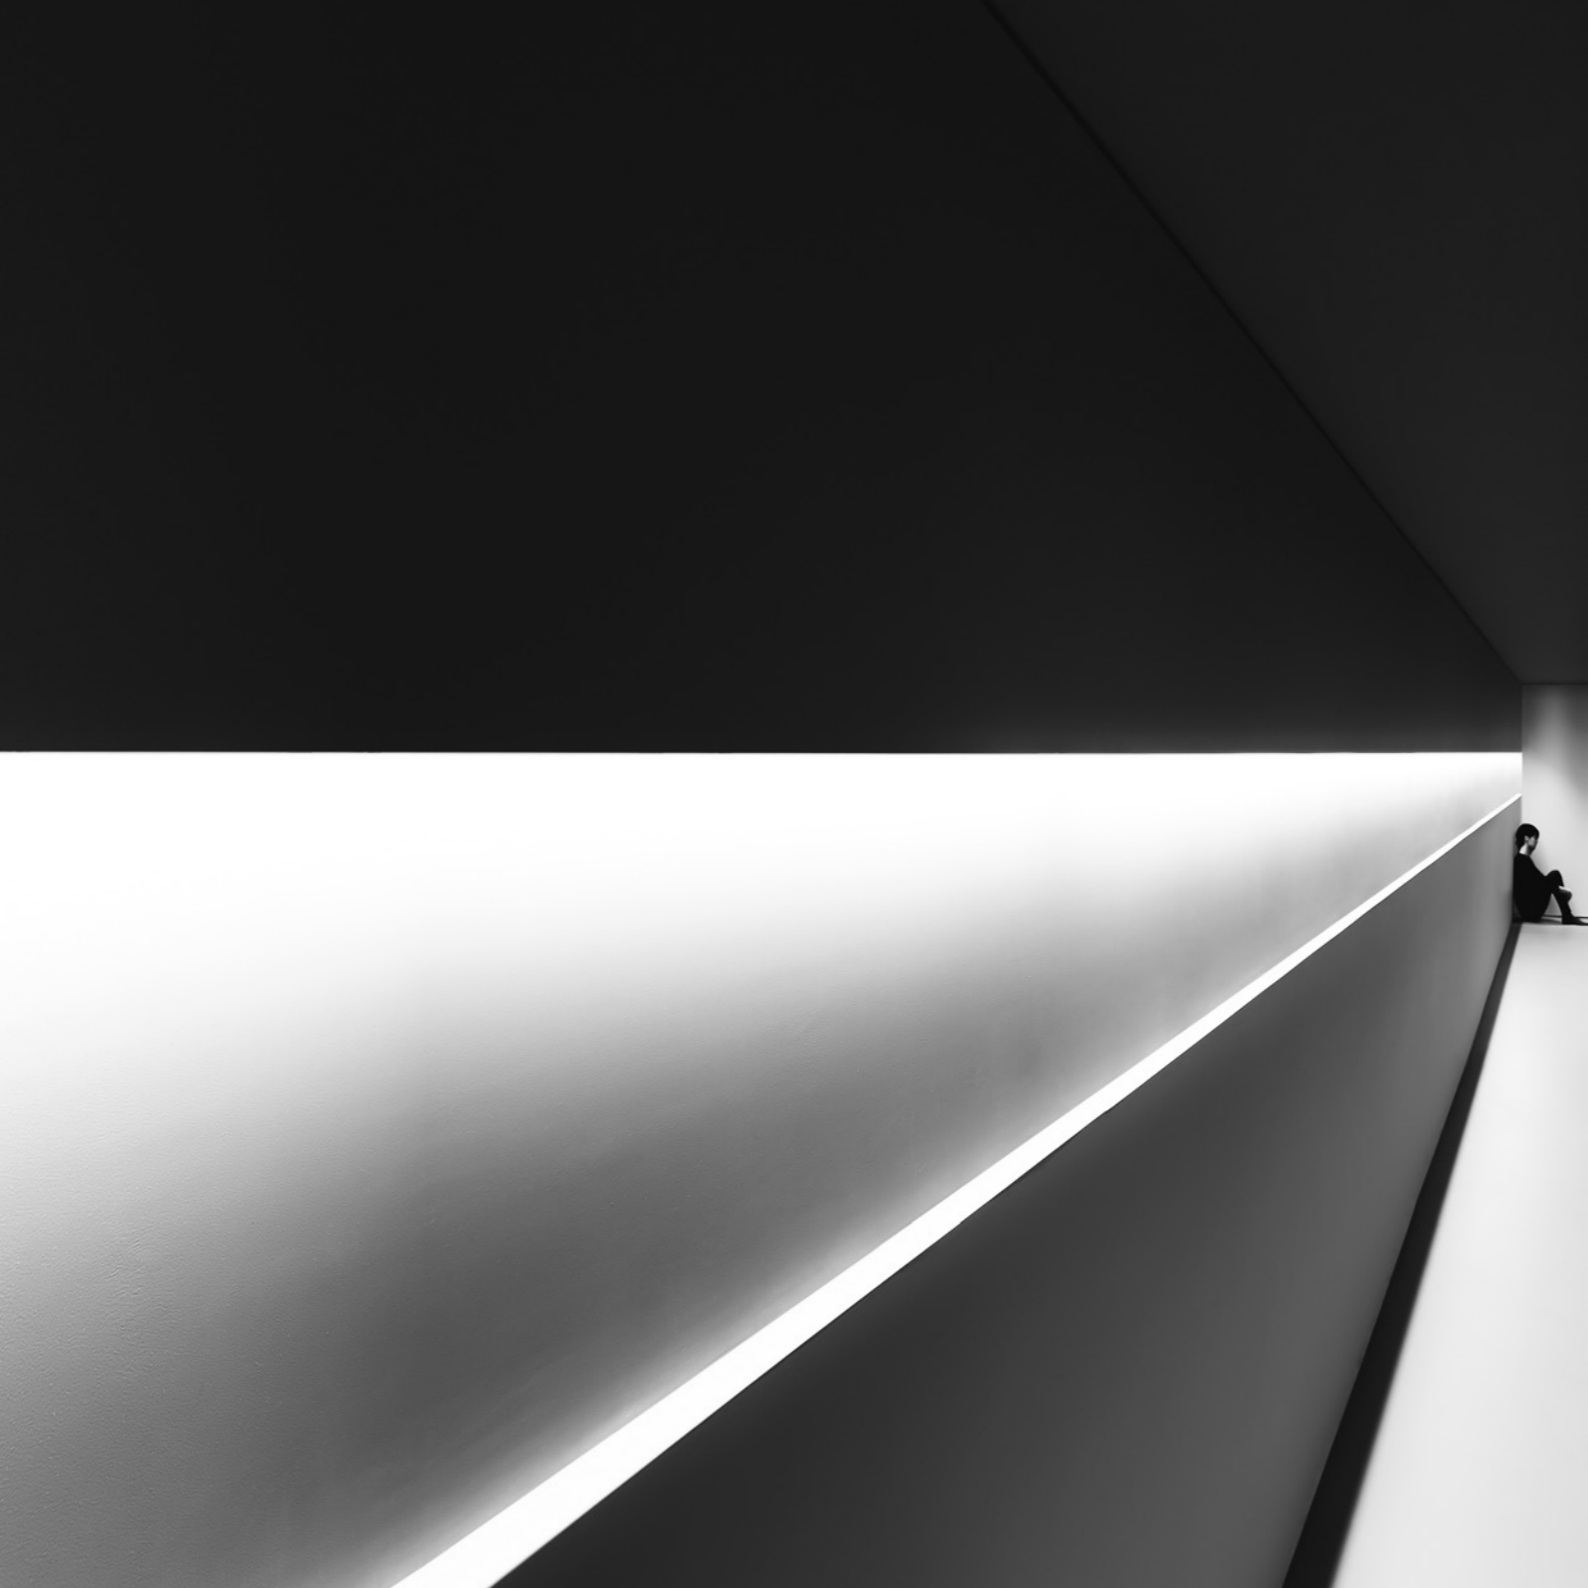

Profiles designed to create projects with continuous light.


Systems / Direct / Indoor

Material Metal
Finish .00 Standard

Note Recessed profile with continuous light.

Compulsory accessories

Installation kits



Aluminium profile 2 m		Not included
Standard	With opal cover	1A4970000.01.00



Cap		Not included
Standard		1A4970000.02.00



Fixing spring		Not included
Standard		1A4970000.03.00


Compulsory accessories

LED modules




Strip LED - 5 m - IP20		Not included
	Input 24V DC - 63W - IP20 2700K - 6200lm - CRI >94	1A5010000.27.20
	Input 24V DC - 63W - IP20 3000K - 6900lm - CRI >94	1A5010000.30.20


Drivers




Driver		Not included
100-240V	24V/80W/IP20/ON/OFF	1Z1120440



Driver		Not included
100-240V	24V/96W/IP67/1-10V	1Z1120540



Driver		Not included
100-240V	24V/150W/IP67/1-10V	1Z1120500



Controller		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010




Systems / Direct / Indoor

Material Metal
Finish .00 Standard

Note Profile with continuous light.

Compulsory accessories

Installation kits



Aluminium profile 2 m		Not included
Standard	With opal cover	1A4970000.04.00



Cap		Not included
Standard		1A4970000.05.00



Fixing spring		Not included
Standard		1A4970000.06.00


Compulsory accessories

LED modules




Strip LED - 5 m - IP20		Not included
	Input 24V DC - 63W - IP20 2700K - 6200lm - CRI >94	1A5010000.27.20
	Input 24V DC - 63W - IP20 3000K - 6900lm - CRI >94	1A5010000.30.20


Drivers




Driver		Not included
100-240V	24V/80W/IP20/ON/OFF	1Z1120440



Driver		Not included
100-240V	24V/96W/IP67/1-10V	1Z1120540



Driver		Not included
100-240V	24V/150W/IP67/1-10V	1Z1120500



Controller		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010




Systems / Direct / Indoor

Material Metal
 Finish .00 Standard


Note Recessed profile with continuous light.

Compulsory accessories


Installation kits




Aluminium profile 2 m	Not included
Standard	1A4970000.07.00




Opal cover 2 m	Not included
Standard	1A4970000.08.00




Transparent cover 2 m	Not included
Standard	1A4970000.09.00




Satin cover 2 m	Not included
Standard	1A4970000.10.00



Cap	Not included
Standard	1A4970000.11.00



Adhesive 1 m	Not included
Standard	1A4970000.12.00



Adhesive magnet 1 m	Not included
Standard	1A4970000.13.00

Compulsory accessories

LED modules



Strip LED - 5 m - IP20	Not included
Input 24V DC - 63W - IP20 2700K - 6200lm - CRI >94	1A5010000.27.20
Input 24V DC - 63W - IP20 3000K - 6900lm - CRI >94	1A5010000.30.20



Strip LED - 5 m - IP20	Not included
Input 24V DC - 72W - IP20 2700K - 7100lm - CRI >80	1A4980000.27.20
Input 24V DC - 72W - IP20 3000K - 7875lm - CRI >80	1A4980000.30.20




Strip LED - 5 m - IP20	Not included
Input 24V DC - 96W - IP20 2700K - 10500lm - CRI >80	1A4990000.27.20
Input 24V DC - 96W - IP20 3000K - 11700lm - CRI >80	1A4990000.30.20




Strip LED - 5 m - IP65	Not included
Input 24V DC - 72W - IP65 2700K - 7100lm - CRI >82	1A5000000.27.20
Input 24V DC - 72W - IP65 3000K - 7875lm - CRI >82	1A5000000.30.20


Drivers




Driver	Not included
100-240V 24V/80W/IP20/ON/OFF	1Z1120440



Driver	Not included
100-240V 24V/96W/IP67/1-10V	1Z1120540



Driver	Not included
100-240V 24V/150W/IP67/1-10V	1Z1120500



Controller	Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010




Systems / Direct / Indoor

Material Metal
 Finish .00 Standard


Note Recessed profile with continuous light.

Compulsory accessories


Installation kits



Aluminium profile 2 m	Not included
Standard	1A4970000.14.00



Opal cover 2 m	Not included
Standard	1A4970000.08.00



Transparent cover 2 m	Not included
Standard	1A4970000.09.00




Satin cover 2 m	Not included
Standard	1A4970000.10.00



Cap	Not included
Standard	1A4970000.15.00



Fixing spring	Not included
Standard	1A4970000.16.00



Formwork kit 2 m	Not included
Standard	1A4970000.17.00

Compulsory accessories

LED modules



Strip LED - 5 m - IP20	Not included
Input 24V DC - 63W - IP20 2700K - 6200lm - CRI >94	1A5010000.27.20
Input 24V DC - 63W - IP20 3000K - 6900lm - CRI >94	1A5010000.30.20



Strip LED - 5 m - IP20	Not included
Input 24V DC - 72W - IP20 2700K - 7100lm - CRI >80	1A4980000.27.20
Input 24V DC - 72W - IP20 3000K - 7875lm - CRI >80	1A4980000.30.20




Strip LED - 5 m - IP20	Not included
Input 24V DC - 96W - IP20 2700K - 10500lm - CRI >80	1A4990000.27.20
Input 24V DC - 96W - IP20 3000K - 11700lm - CRI >80	1A4990000.30.20




Strip LED - 5 m - IP65	Not included
Input 24V DC - 72W - IP65 2700K - 7100lm - CRI >82	1A5000000.27.20
Input 24V DC - 72W - IP65 3000K - 7875lm - CRI >82	1A5000000.30.20


Drivers




Driver	Not included
100-240V 24V/80W/IP20/ON/OFF	1Z1120440



Driver	Not included
100-240V 24V/96W/IP67/1-10V	1Z1120540



Driver	Not included
100-240V 24V/150W/IP67/1-10V	1Z1120500



Controller	Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010




Systems / Direct / Indoor

Material Metal
 Finish .00 Standard

Note Recessed profile with continuous light.

Compulsory accessories

Installation kits



Aluminium profile 2 m	Not included
Standard	1A4970000.18.00
Opal cover 2 m	Not included
Standard	1A4970000.19.00

Compulsory accessories

LED modules



Strip LED - 5 m - IP20	Not included
Input 24V DC - 63W - IP20 2700K - 6200lm - CRI >94	1A5010000.27.20
Input 24V DC - 63W - IP20 3000K - 6900lm - CRI >94	1A5010000.30.20



Strip LED - 5 m - IP20	Not included
Input 24V DC - 72W - IP20 2700K - 7100lm - CRI >80	1A4980000.27.20
Input 24V DC - 72W - IP20 3000K - 7875lm - CRI >80	1A4980000.30.20




Strip LED - 5 m - IP20	Not included
Input 24V DC - 96W - IP20 2700K - 10500lm - CRI >80	1A4990000.27.20
Input 24V DC - 96W - IP20 3000K - 11700lm - CRI >80	1A4990000.30.20




Strip LED - 5 m - IP65	Not included
Input 24V DC - 72W - IP65 2700K - 7100lm - CRI >82	1A5000000.27.20
Input 24V DC - 72W - IP65 3000K - 7875lm - CRI >82	1A5000000.30.20


Drivers




Driver	Not included
100-240V 24V/80W/IP20/ON/OFF	1Z1120440



Driver	Not included
100-240V 24V/96W/IP67/1-10V	1Z1120540



Driver	Not included
100-240V 24V/150W/IP67/1-10V	1Z1120500



Controller	Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010



OUTDOOR



BELLADINOTTE

Maurizio Mancini / 2012

The magic of the mirror brought into the garden.
A study of camouflage. The reflective surface is used as a tool
to camouflage and hide the machine to create light.
The reflection of the environment makes the luminaire invisible.


BELLADINOTTE

Maurizio Mancini / 2012

Floor-Outdoor / Indirect / Outdoor

Material Metal
Finish .00 Standard

Note Outdoor lamp with spike. Adjustable along the vertical axis. Plane with mirror finish. Matt green mirror finish rear plane. Black cable (5 m).



BELLADINOTTE


2x4,2W
 24V DC
 2700K - 262lm / 3000K - 282lm
 CRI >90
 Driver not included
 CE IP67

Standard - 2700K
 Standard - 3000K

1A3560000.27.20
 1A3560000.30.20

Compulsory accessories

Drivers



Driver		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories

Installation kits



Driver connector IP68		Included
	1 Piece	1A1660000.00.00





BUBKA


Daniele Sprega / 2014

A perfect tool to make outdoor light.
The light as a tool for guiding people along a path.

Outdoor-Floor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal
Finish .00 Standard

Note Outdoor floor luminaire. Adjustable along the vertical axis. AISI 316L stainless steel stem. Black cable (7 m).



BUBKA


8,4W
 Max 700mA DC
 2700K - 639lm / 3000K - 639lm
 CRI >90
 Driver not included
 CE IP65

Standard - 2700K
 Standard - 3000K

1A3600000.27.20
 1A3600000.30.20

Compulsory accessories

Drivers




Driver			Not included
220-240V(100-127V)	700mA/30W(15W)/IP68/ON/OFF	1Z0241110	

Optional accessories

Installation kits




Driver connector IP68		Included
1 Piece	1A1660000.00.00	



Anchoring bolt		Not included
Cut-out Ø 250 mm Minimum space for mounting 350 mm	1A3620000.00.00	

Lighting modules



Additional LED head		Not included
Matt Black	Max 700mA DC - 8,4W 3000K - 639lm - CRI >90	1A3610400.30.20
	Max 700mA DC - 8,4W 2700K - 639lm - CRI >90	1A3610400.27.20



BUBKA BOLLARD

Daniele Sprega / 2021

A perfect tool to make outdoor light.
The light as a tool for guiding people along a path.


BUBKA BOLLARD

Daniele Sprega / 2021

Outdoor-Floor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal
Finish .00 Standard

Note Outdoor floor luminaire. Adjustable along the vertical axis. AISI 316L stainless steel stem. Black cable (9 m).



BUBKA BOLLARD


8,4W
 Max 700mA DC
 2700K - 350lm / 3000K - 350lm
 CRI >90
 Driver not included
 CE IP65

Standard - 2700K
 Standard - 3000K

1A1440000.27.20
 1A1440000.30.20

Compulsory accessories

Drivers



Driver

220-240V(100-127V) 350mA/17W(15W)/IP68/ON/OFF

1Z0240880

Not included

Daniele Sprega / 2021

BUBKA BOLLARD

Optional accessories

Installation kits




Driver connector IP68

1 Piece

1A1660000.00.00

Included




Anchoring bolt

Cut-out Ø 250 mm
 Minimum space for mounting 350 mm

1A3620000.00.00

Not included

Lighting modules



Additional LED head

Matt Black

Max 700mA DC - 8,4W
 2700K - 639lm - CRI >90

1A3610400.27.20

Not included

Max 700mA DC - 8,4W
 3000K - 639lm - CRI >90

1A3610400.30.20



BUIO

Maurici Ginés / 2023

A small black dot reveals its function only when necessary.
For us the secret of light lies not in its shape, or in some technical virtuosity,
but in the choice and assumption of a method,
the method of amazement and memory.

BUIO - TRIMLESS


Maurici Ginés / 2023

Recessed / Direct / Outdoor

Material

Finish .04 Matt Black

Note Outdoor luminaire. Available with transparent or black glass. Black cable (1 m).




BUJO TRIMLESS - 13°

Black filter
6,2W
24V DC
2700K - 120lm / 3000K - 123lm
CRI >90
Beam 13°
UGR <19
Driver not included
CE IP67

Matt Black - 2700K
Matt Black - 3000K

1A5200400.27.20
1A5200400.30.20



BUJO TRIMLESS - 25°


Black filter
6,2W
24V DC
2700K - 150lm / 3000K - 155lm
CRI >90
Beam 25°
UGR <19
Driver not included
CE IP67

Matt Black - 2700K
Matt Black - 3000K

1A5220400.27.20
1A5220400.30.20

Maurici Ginés / 2023

BUIO - TRIMLESS




BUJO TRIMLESS - 32°

Black filter
6,2W
24V DC
2700K - 140lm / 3000K - 144lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP67

Matt Black - 2700K
Matt Black - 3000K

1A5210400.27.20
1A5210400.30.20




BUJO TRIMLESS ELLIPTICAL

Black filter
6,2W
24V DC
2700K - 132lm / 3000K - 136lm
CRI >90
UGR <19
Driver not included
CE IP67

Matt Black - 2700K
Matt Black - 3000K

1A5230400.27.20
1A5230400.30.20




BUIO TRIMLESS - 13°

Transparent filter
 6,2W
 24V DC
 2700K - 239lm / 3000K - 246lm
 CRI >90
 Beam 13°
 UGR <19
 Driver not included



Matt Black - 2700K
 Matt Black - 3000K

1A5240400.27.20
 1A5240400.30.20




BUIO TRIMLESS - 25°

Transparent filter
 6,2W
 24V DC
 2700K - 300lm / 3000K - 309lm
 CRI >90
 Beam 25°
 UGR <19
 Driver not included



Matt Black - 2700K
 Matt Black - 3000K

1A5260400.27.20
 1A5260400.30.20




BUIO TRIMLESS - 32°

Transparent filter
 6,2W
 24V DC
 2700K - 279lm / 3000K - 288lm
 CRI >90
 Beam 32°
 UGR <19
 Driver not included



Matt Black - 2700K
 Matt Black - 3000K

1A5250400.27.20
 1A5250400.30.20



BUIO TRIMLESS ELLIPTICAL

Transparent filter
 6,2W
 24V DC
 2700K - 263lm / 3000K - 271lm
 CRI >90
 UGR <19
 Driver not included




Matt Black - 2700K
 Matt Black - 3000K

1A5270400.27.20
 1A5270400.30.20

Compulsory accessories

Installation kits




Installation box

Standard

1A5280000.00.00

Not included

Drivers



Driver

110-240V

24V/25W/IP67/ON/OFF

1Z1120620

Not included

BUIO - TRIM


Maurici Ginés / 2023

Recessed / Direct / Outdoor

Material

Finish .04 Matt Black

Note Outdoor luminaire. Available with transparent or black glass. Black cable (1 m).




BUIO TRIM - 13°

Black filter
6,2W
24V DC
2700K - 120lm / 3000K - 123lm
CRI >90
Beam 13°
UGR <19
Driver not included
CE IP67

Matt Black - 2700K
Matt Black - 3000K

1A5120400.27.20
1A5120400.30.20



BUIO TRIM - 25°


Black filter
6,2W
24V DC
2700K - 300lm / 3000K - 155lm
CRI >90
Beam 25°
UGR <19
Driver not included
CE IP67

Matt Black - 2700K
Matt Black - 3000K

1A5140400.27.20
1A5140400.30.20

Maurici Ginés / 2023

BUIO - TRIM




BUIO TRIM - 32°

Black filter
6,2W
24V DC
2700K - 140lm / 3000K - 144lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP67

Matt Black - 2700K
Matt Black - 3000K

1A5130400.27.20
1A5130400.30.20




BUIO TRIM ELLIPTICAL

Black filter
6,2W
24V DC
2700K - 132lm / 3000K - 136lm
CRI >90
UGR <19
Driver not included
CE IP67

Matt Black - 2700K
Matt Black - 3000K

1A5150400.27.20
1A5150400.30.20




BUJO TRIM - 13°

Transparent filter
6,2W
24V DC
2700K - 239lm / 3000K - 246lm
CRI >90
Beam 13°
UGR <19
Driver not included



Matt Black - 2700K
Matt Black - 3000K

1A5160400.27.20
1A5160400.30.20




BUJO TRIM - 25°

Transparent filter
6,2W
24V DC
2700K - 300lm / 3000K - 309lm
CRI >90
Beam 25°
UGR <19
Driver not included



Matt Black - 2700K
Matt Black - 3000K

1A5180400.27.20
1A5180400.30.20




BUJO TRIM - 32°

Transparent filter
6,2W
24V DC
2700K - 279lm / 3000K - 288lm
CRI >90
Beam 32°
UGR <19
Driver not included



Matt Black - 2700K
Matt Black - 3000K

1A5170400.27.20
1A5170400.30.20



BUJO TRIM ELLIPTICAL

Transparent filter
6,2W
24V DC
2700K - 263lm / 3000K - 271lm
CRI >90
UGR <19
Driver not included




Matt Black - 2700K
Matt Black - 3000K

1A5190400.27.20
1A5190400.30.20

Compulsory accessories


Installation kits



Installation box

Standard	1A5280000.00.00	Not included
----------	-----------------	--------------

Drivers



Driver

110-240V	24V/25W/IP67/ON/OFF	1Z1120620	Not included
----------	---------------------	-----------	--------------

BUIO - SPOT

Maurici Ginés / 2023


Floor-Wall-Ceiling / Direct / Outdoor

Material

Finish .04 Matt Black

Note

Outdoor luminaire. Adjustable spike and wall versions. Available with transparent or black glass. AISI 316L stainless steel accessories for the spike and wall versions. Black cable (1 m).




BUIO - 13°

Black filter
6,2W
24V DC
2700K - 120lm / 3000K - 123lm
CRI >90
Beam 13°
UGR <19
Driver not included
CE IP67

Matt Black - 2700K
Matt Black - 3000K

1A5040400.27.20
1A5040400.30.20



BUIO - 25°


Black filter
6,2W
24V DC
2700K - 150lm / 3000K - 155lm
CRI >90
Beam 25°
UGR <19
Driver not included
CE IP67

Matt Black - 2700K
Matt Black - 3000K

1A5060400.27.20
1A5060400.30.20

Maurici Ginés / 2023

BUIO - SPOT




BUIO - 32°

Black filter
6,2W
24V DC
2700K - 140lm / 3000K - 144lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP67

Matt Black - 2700K
Matt Black - 3000K

1A5050400.27.20
1A5050400.30.20




BUIO ELLIPTICAL

Black filter
6,2W
24V DC
2700K - 132lm / 3000K - 136lm
CRI >90
UGR <19
Driver not included
CE IP67

Matt Black - 2700K
Matt Black - 3000K

1A5070400.27.20
1A5070400.30.20




BUIO - 13°

Transparent filter
 6,2W
 24V DC
 2700K - 239lm / 3000K - 246lm
 CRI >90
 Beam 13°
 UGR <19
 Driver not included



Matt Black - 2700K
 Matt Black - 3000K

1A5080400.27.20
 1A5080400.30.20




BUIO - 25°

Transparent filter
 6,2W
 24V DC
 2700K - 300lm / 3000K - 309lm
 CRI >90
 Beam 25°
 UGR <19
 Driver not included



Matt Black - 2700K
 Matt Black - 3000K

1A5100400.27.20
 1A5100400.30.20




BUIO - 32°

Transparent filter
 6,2W
 24V DC
 2700K - 279lm / 3000K - 288lm
 CRI >90
 Beam 32°
 UGR <19
 Driver not included



Matt Black - 2700K
 Matt Black - 3000K

1A5090400.27.20
 1A5090400.30.20



BUIO ELLIPTICAL

Transparent filter
 6,2W
 24V DC
 2700K - 263lm / 3000K - 271lm
 CRI >90
 UGR <19
 Driver not included




Matt Black - 2700K
 Matt Black - 3000K


1A5110400.27.20
 1A5110400.30.20

Compulsory accessories


Installation kits




Wall bracket		Not included
Stainless Steel	Brushed INOX	1A4431000.00.00



Ceiling rose		Not included
Matt Black	Brushed INOX	1A4441000.00.00




Earth spike		Not included
Stainless Steel	Brushed INOX	1A4451000.00.00



Tree strap		Not included
Standard	Length 1 m	1A4590000.00.00


Drivers



Driver		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620





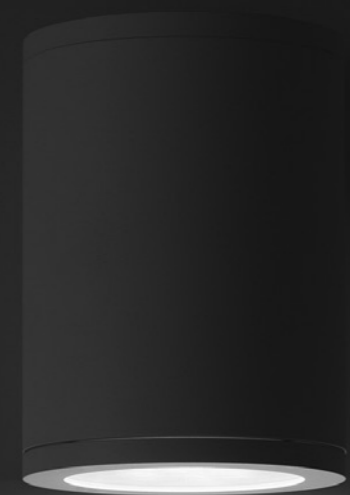

A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.


CHILLOUT

/ 2011

Outdoor-Wall / Direct / Outdoor

Material Glass - Metal
Finish .03 Matt White

Note Outdoor wall luminaire. Adjustable along the vertical axis.



CHILLOUT

Max 12W - E27
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
 C E IP65

Matt White - ON/OFF

1A3660300.00.00

Optional accessories

Installation kits



Driver connector IP68	Included
1 Piece	1A1660000.00.00

Bulbs



LED - E27 - PAR30s	Not included
220-240V - 9,5W - 25° 3000K - 760lm - CRI >80 Energy Efficiency F - Dimmable	1Y0330730



GRILLO

Daniele Sprega / 2012




A small luminous elf that you can install in your garden or inside a vase.
A thin stem stuck into the ground and a little adjustable LED projector.
For illuminating a flower, a plant or simply to accompany us along a path.
Lamp with spike.

Floor-Outdoor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal
Finish .04 Matt Black

Note Outdoor lamp with spike. Adjustable in all directions. AISI 316L stainless steel stem. Black cable (5 m).

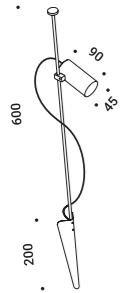

GRILLO


4,2W
 24V DC
 2700K - 262lm / 3000K - 282lm
 CRI >90
 Driver not included
 CE IP67

Matt Black - 2700K
 Matt Black - 3000K

1A3570400.27.20
 1A3570400.30.20

Compulsory accessories

Drivers



Driver			Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620	

Optional accessories

Installation kits



Driver connector IP68		Included
1 Piece	1A1660000.00.00	



Additional stem 1 m		Not included
Standard	AISI 316L stainless steel	1A3590000.00.00

Lighting modules



Additional LED head		Not included
Matt Black	24V DC - 4,2W 2700K - 262lm - CRI >90	1A3580400.27.20
	24V DC - 4,2W 3000K - 282lm - CRI >90	1A3580400.30.20



HAZARD

Davide Groppi / 2023

We have always been thrilled by bare, abandoned lamps.
On the walls of mountain huts, in the countryside of our plain.
Unfinished works, lamps still to be decided, ephemeral thoughts that become poetry.
Wall lamp with direct light for outdoor environments
with steel nail subject to natural oxidation over time.


HAZARD

Davide Groppi / 2023

Wall-Outdoor / Direct / Outdoor

Material Metal - Thermoplastic resin
Finish .00 Standard

Note Outdoor wall luminaire. Adjustable in all directions. One red and one black cable (1,5 m).

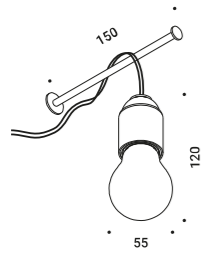

HAZARD


0,6W - E27
36V DC
2200K - 50lm
CRI 80
Driver not included
Bulb included
CE IP65

Standard - 2200K

1A4210000.22.20

Compulsory accessories

Drivers



Driver

110-240V

36V/36W/IP67/ON/OFF

1Z1120590

Not included








Light has found a home.
A lamp designed to welcome, illuminating the entrance.

Wall-Outdoor / Direct / Outdoor

Material Metal
 Finish .00 Standard

Note Outdoor wall luminaire. Matt black body and matt red top cover. Red hole light.




IMU
 5,5W
 Max 350mA DC
 3000K - 306lm
 CRI >80
 Driver not included
 CE IP65

Standard - 3000K

1A3550000.30.20

Compulsory accessories

Drivers



Driver		Not included
220-240V(100-127V)	350mA/17W(15W)/IP68/ON/OFF	1Z0240880


Optional accessories

Installation kits



Driver connector IP68		Included
	1 Piece	1A1660000.00.00



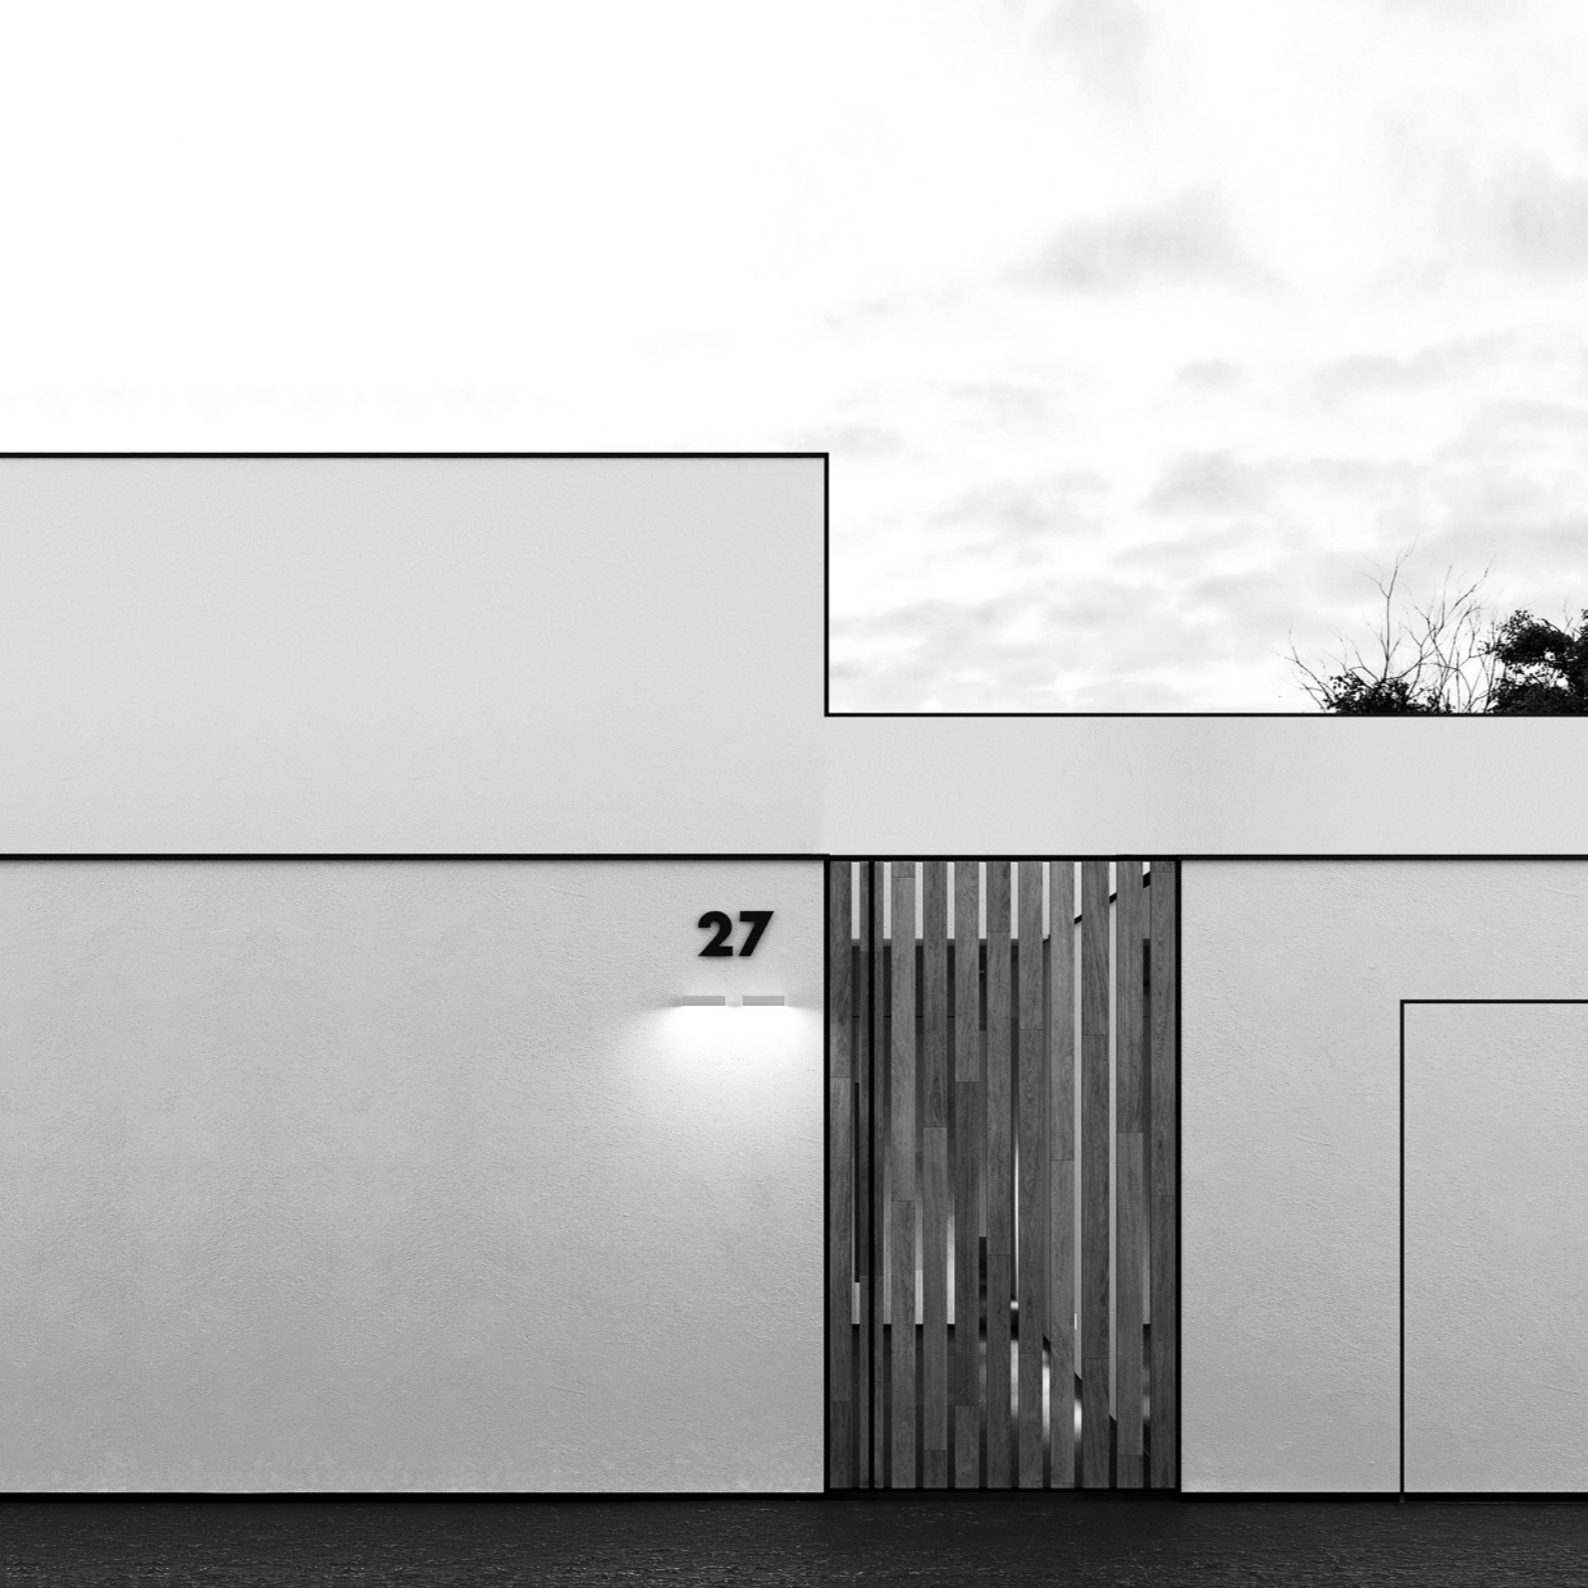

Light, waiting for Romeo.
An outdoor light, for walls or to illuminate the entrance.

JULIET


/ 2014

Wall-Outdoor / Diffuse / Outdoor

Material Glass - Metal

Finish .03 Matt White

Note Outdoor wall luminaire.



JULIET

18W

220-240V - 50/60Hz

2700K - 827lm / 3000K - 865lm

CRI >80

TRIAC/IGBT

CE IP65

Matt White - 2700K - TRIAC/IGBT

1A3670300.27.02

Matt White - 3000K - TRIAC/IGBT

1A3670300.30.02

Optional accessories

Installation kits



Driver connector IP68

Included

1 Piece

1A1660000.00.00



LENTA

Bestetti Associati - Davide Groppi / 2011



A lantern. Soft and diffuse light.
A Slow-Light project for outdoors.

LENTA


Bestetti Associati - Davide Groppi / 2011

Floor-Outdoor / Diffuse / Outdoor

Material Metal - Methacrylate - Polycarbonate

Finish .03 Matt White

Note Outdoor floor luminaire. Matt white diffuser. Black cable (5 m).



LENTA

Max 18W - E27

100-240V - 50/60Hz

ON/OFF

Bulb not included

CE IP65

Matt White - ON/OFF

1A3630300.00.00

Optional accessories

Installation kits



Driver connector IP68

Included

1 Piece

1A1660000.00.00

Bulbs



LED - E27 - A60

Not included


220-240V - 11,2W - 360°

2700K - 1521lm - CRI >90

Energy Efficiency D - Dimmable

1Y0330790

Other accessories



IP65 Schuko adapter

Not included

IP65

1A2950000.00.00





NEURO OUTDOOR

Davide Groppi - Beppe Merlano / 2022

The idea is to bring light wherever you like.
A simple project: a cable and a LED.
Indoor version also available.


NEURO OUTDOOR

Davide Groppi - Beppe Merlano / 2022

Suspension-Outdoor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal
Finish **.04** Matt Black **.32** Copper Oxide

Note Outdoor suspension luminaire. Black cable (10 m).



NEURO OUTDOOR


4,2W
 24V DC
 2700K - 262lm / 3000K - 282lm
 CRI >90
 Driver not included
 CE IP67

Matt Black - 2700K
 Matt Black - 3000K
 Copper Oxide - 2700K
 Copper Oxide - 3000K

1A4030400.27.20
 1A4030400.30.20
 1A4033200.27.20
 1A4033200.30.20

Compulsory accessories

Drivers



Driver			Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620	

Optional accessories

Installation kits



Driver connector IP68			Included
	1 Piece	1A1660000.00.00	





NUIT

Maurici Ginés / 2023

Night has always been a source of inspiration.
We walk, and we are not alone.
Nuit is a small travel companion that draws our night-time journeys.


NUIT

Maurici Ginés / 2023

Outdoor-Recessed / Diffuse / Indoor-Outdoor

Material	Metal		
Finish	.03 Matt White	.27 Gravity Black	.38 Blasted Inox

Note Outdoor recessed luminaire. Minimum space for recessed installation: 55 mm.



NUIT


1W
24V DC
2700K - 45lm / 3000K - 50lm
CRI >90
Driver not included
CE IP65

Matt White - 2700K
Matt White - 3000K
Gravity Black - 2700K
Gravity Black - 3000K
Blasted Inox - 2700K
Blasted Inox - 3000K

1A1320300.27.20
1A1320300.30.20
1A1322700.27.20
1A1322700.30.20
1A1323800.27.20
1A1323800.30.20


Compulsory accessories

Installation kits



Concrete box			Not included
Standard		1A4460000.00.00	

Drivers



Driver			Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620	

Maurici Ginés / 2023

NUIT

Optional accessories

Installation kits



Plasterboard frame 12,5 mm			Not included
Matt White	Cut-out 100x100 mm Minimum space for mounting 120 mm	1A4470300.00.00	



Adapter plasterboard 25 mm			Not included
Standard		1A5030000.00.00	



ORIGINE OUTDOOR

Davide Groppi - Giorgio Rava / 2020

From the Latin "origo", start, birth, source. It appears like a bud emerging from the ground and soaring upwards towards the sky, a stem that becomes increasingly thinner. Mysterious, enigmatic but comfortable, it combines the fascination of the unknown with the pleasure of a sophisticated and elegant ambient light. Origine sculpts and enhances every environment with its indirect light, which is intentionally non-invasive, graphic and fascinating.

Indoor version also available.

**AZ Award 2021 and People's Choice
Archiproducts Design Award 2020**


ORIGINE OUTDOOR

Davide Groppi - Giorgio Rava / 2020

Outdoor-Floor / Indirect / Outdoor

Material Glass fiber - Metal
Finish .04 Matt Black

Note Outdoor floor luminaire. Black cable (5 m).

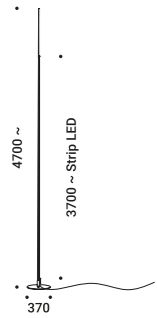

ORIGINE OUTDOOR


35W
 24V DC
 2700K - 2872lm / 3000K - 2930lm
 CRI >80
 Driver not included
 CE IP65

Matt Black - 2700K
 Matt Black - 3000K

1A2480400.27.20
 1A2480400.30.20

Compulsory accessories

Drivers



Driver		Not included
100-240V	24V/60W/IP67/1-10V	1Z1120260

Optional accessories

Installation kits



Driver connector IP68		Included
1 Piece		1A1660000.00.00





Q²


Alberto Zattin / 2006

A piece of architecture to be used in space.
A concrete cube that allows you to understand volumes and architecture
in an unusual and sometimes unprecedented way.
Indoor version also available.

Floor-Outdoor / Direct / Outdoor

Material Cement - Metal
Finish .00 Standard

Note Outdoor floor luminaire. Concrete body. Black cable (2,5 m).




Q²
 20W
 Max 500mA DC
 3000K - 2058lm
 CRI >90
 Driver not included
 CE IP67

Standard - 3000K

| 1A1150000.30.20 |

Compulsory accessories

Drivers




Driver		Not included
220-240V(110-127V)	500mA/24W(15W)/IP68/ON/OFF	1Z0241170

Optional accessories

Installation kits



Driver connector IP68		Included
	1 Piece	1A1660000.00.00

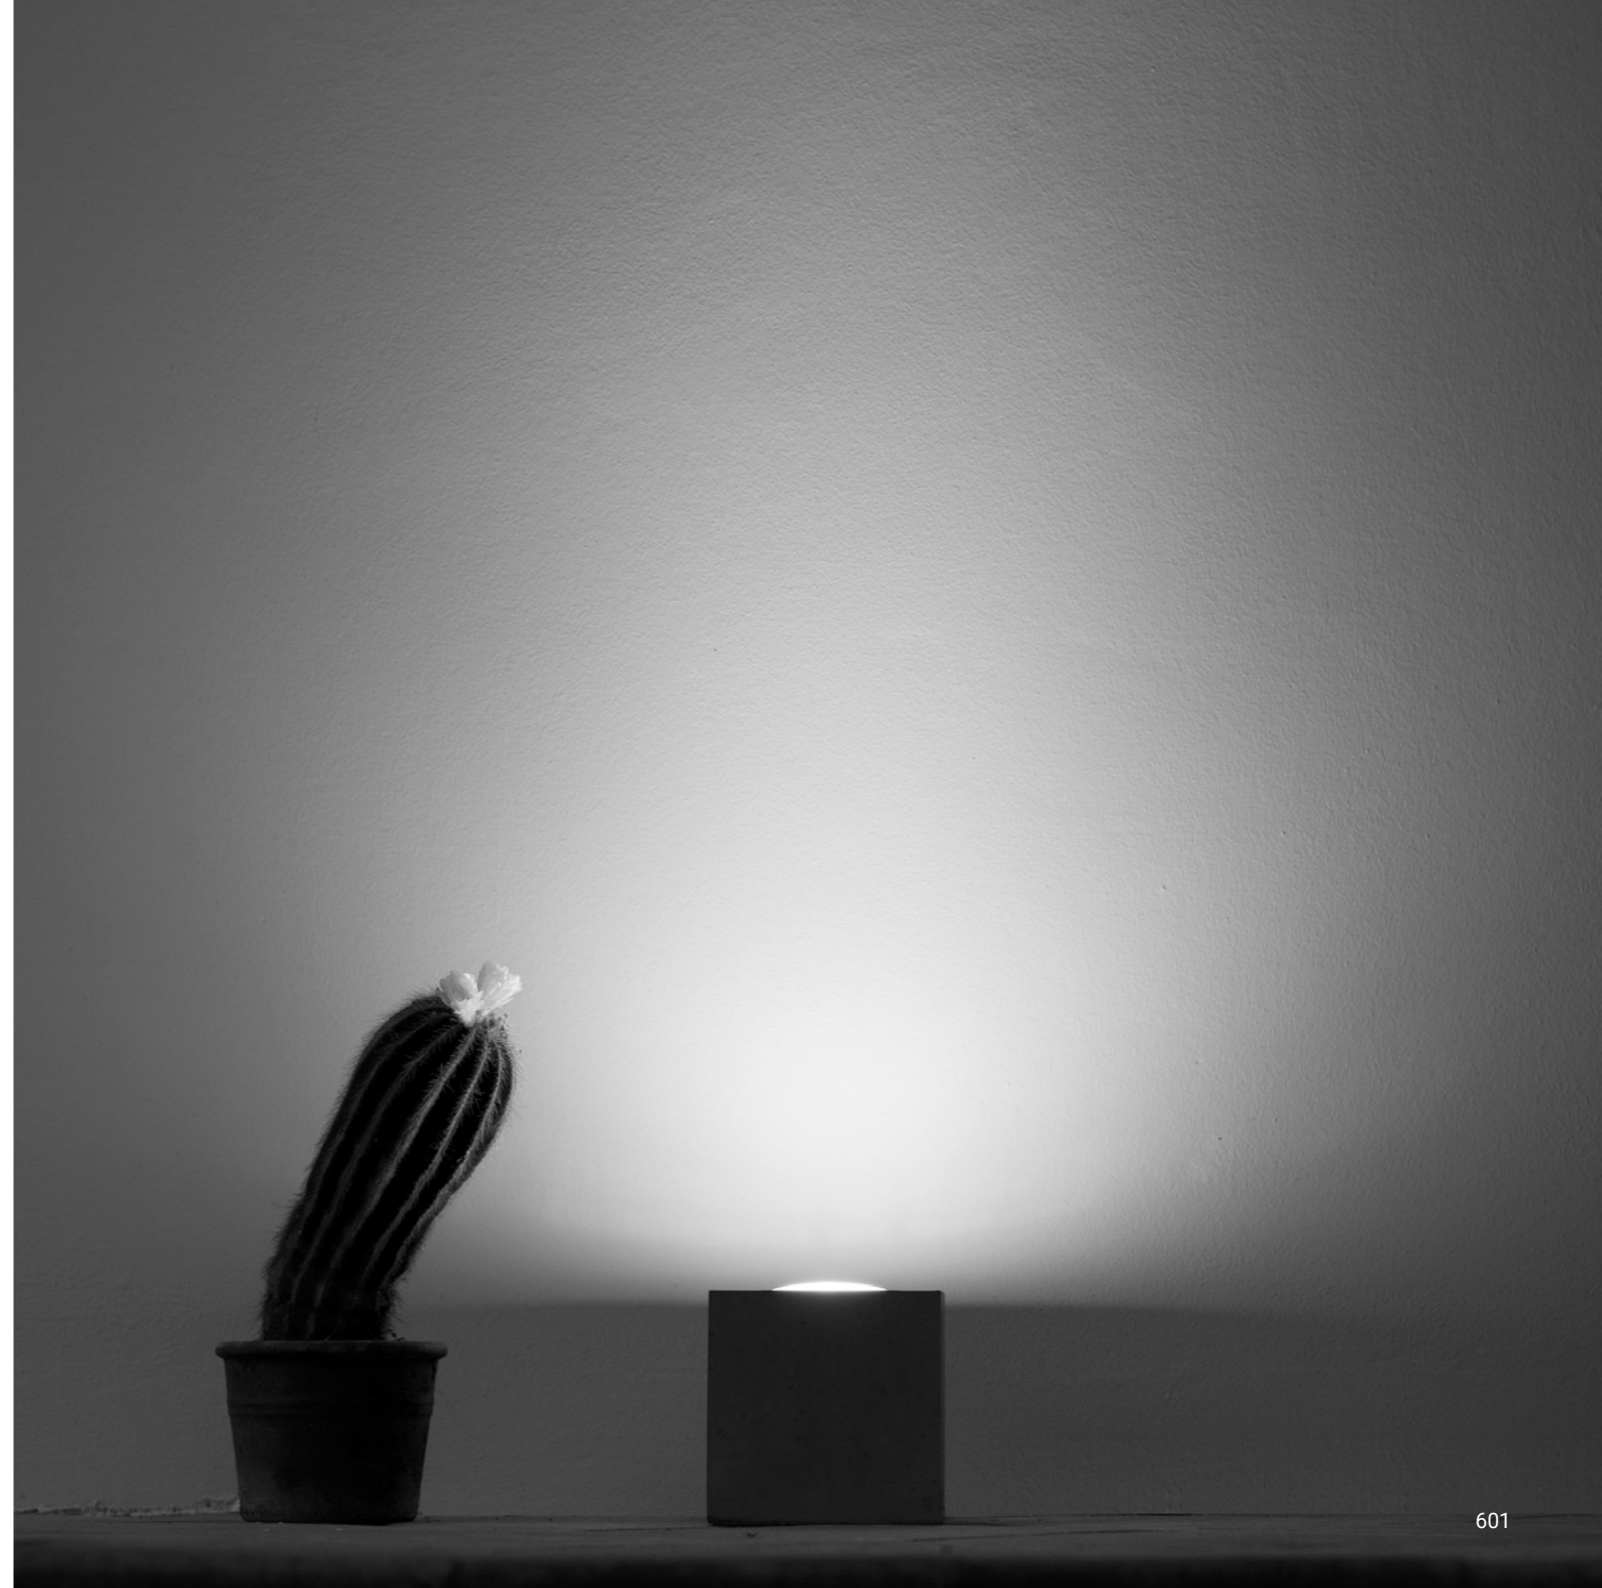

SAMPEI 440 OUTDOOR

Enzo Calabrese - Davide Groppi / 2011



A special project, an authentic ready-made.
Obtained from a fishing flexible rod, it is a delicate and elegant sign,
which brings to mind the subtle branches of a willow tree
or bamboo canes floating on a light breeze.
Sampei is an unexpected gift, it is the magic of looking up,
using light as a hook, and being amazed by so much weightlessness.
Indoor version also available.

Compasso d'Oro ADI
Award 2014




SAMPEI 440 OUTDOOR

Enzo Calabrese - Davide Groppi / 2011

Floor-Outdoor / Direct / Outdoor

Material Glass fiber - Metal
Finish .03 Matt White .04 Matt Black

Note Outdoor floor luminaire. Adjustable in all directions. Black cable (5 m).

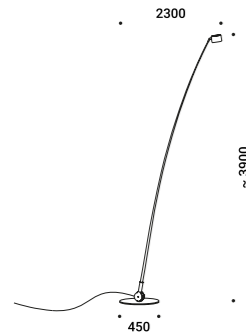

SAMPEI 440 OUTDOOR

8,4W
 Max 700mA DC
 2700K - 639lm / 3000K - 639lm
 CRI >90
 Driver not included


CE IP65

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K

1A3770300.27.20
 1A3770300.30.20
 1A3770400.27.20
 1A3770400.30.20

Compulsory accessories

Drivers



Driver	Not included
220-240V(100-127V) 700mA/30W(15W)/IP68/ON/OFF	1Z0241110

Optional accessories

Installation kits



Driver connector IP68	Included
1 Piece	1A1660000.00.00



SHOJI OUTDOOR

Davide Groppi - Paola Lenti / 2013



A nylon lampshade, strictly hand-stitched and hand-made.
Indoor version also available.


SHOJI OUTDOOR

Davide Groppi - Paola Lenti / 2013

Floor-Outdoor / Diffuse / Outdoor

Material Metal - PBT - Polycarbonate
Finish .00 Standard

Note Outdoor floor luminaire. Hand-stitched shade. Matt black stems. Black cable (5 m).



SHOJI

Max 18W - E27
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
 C E IP65

Standard - ON/OFF

| 1A3640000.00.00 |

Optional accessories

Installation kits




Driver connector IP68	Included
1 Piece	1A1660000.00.00

Bulbs



LED - E27 - A60	Not included
220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790

Other accessories



IP65 Schuko adapter	Not included
IP65	1A2950000.00.00



A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.


SPOT OUTDOOR

/ 2018

Wall-Outdoor / Direct / Outdoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Outdoor wall and ceiling luminaire. Adjustable in all directions.



SPOT OUTDOOR

8,4W
 Max 700mA DC
 2700K - 639lm / 3000K - 639lm
 CRI >90
 Driver not included


CE IP65

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K

1A3650300.27.20
 1A3650300.30.20
 1A3650400.27.20
 1A3650400.30.20

Compulsory accessories

Drivers



Driver	Not included
220-240V(100-127V) 700mA/30W(15W)/IP68/ON/OFF	1Z0241110





Optional accessories

Installation kits





Driver connector IP68	Included
1 Piece	1A1660000.00.00












BULBS / LAMPADINE

	Socket	Voltage	Power	Beam Angle	CCT	Lumens	CRI	Energy Efficiency	Dimmable	Code	Price
	E27	220-240V	7W	360°	2700K	806lm	>80	E	X	1Y2080010	
	E27	220-240V	11,2W	360°	2700K	1521lm	>90	D	X	1Y0330790	
	E27	220-240V	13W	200°	2700K	1521lm	>80	E	-	1Y0330650	
	E27	220-240V	20W	200°	2700K	2452lm	>80	E	X	1Y2160020	
	E27	220-240V	9,5W	25°	3000K	760lm	>80	F	X	1Y0330730	
	GU4	12V	4W	24°	2700K	200lm	>80	G	-	1Y0330450	
	GU10	220-240V	4,9W	120°	3000K	550lm	>80	E	-	1Y0330740	
	GU10	220-240V	5,5W	25°	3000K	375lm	>97	G	X	1Y0330500	
	GU10	230V	7,5W	10°	2700K	390lm	>95	G	X	1Y1580210	
	GU10	230V	7,5W	10°	3000K	410lm	>95	G	X	1Y1580010	
	R7s	220-240V	4W	330°	3000K	450lm	>80	E	-	1Y0000138	
	R7s	220-240V	8W	330°	3000K	1000lm	>80	E	-	1Y0000139	












DG111 LED MODULES / MODULI LED DG111

	Current	Power	Beam Angle	CCT	Lumens	CRI	Energy Efficiency	Dimmable	Code	Price
	350mA DC	11,7W	15°	2700K	1336lm	>90	F	X	1A4700000.27.20	
	350mA DC	11,7W	15°	3000K	1364lm	>90	F	X	1A4700000.30.20	
	350mA DC	11,7W	22°	2700K	1266lm	>90	F	X	1A3890000.27.20	
	350mA DC	11,7W	22°	3000K	1323lm	>90	F	X	1A3890000.30.20	
	350mA DC	11,7W	36°	2700K	1508lm	>90	F	X	1A3900000.27.20	
	350mA DC	11,7W	36°	3000K	1578lm	>90	F	X	1A3900000.30.20	
	500mA DC	16,7W	15°	2700K	1648lm	>90	F	X	1A4700000.27.20	
	500mA DC	16,7W	15°	3000K	1682lm	>90	F	X	1A4700000.30.20	
	500mA DC	16,7W	22°	2700K	1859lm	>90	F	X	1A3890000.27.20	
	500mA DC	16,7W	22°	3000K	1945lm	>90	F	X	1A3890000.30.20	
	500mA DC	16,7W	36°	2700K	1808lm	>90	F	X	1A3900000.27.20	
	500mA DC	16,7W	36°	3000K	1890lm	>90	F	X	1A3900000.30.20	



DRIVERS

	Power	Input	Output	Dimming	Protection	Code	Price
	60W(40W)	220-240V(100-127V)	1000mA	DALI	IP20	1Z0241140.1000	
	50W	100-240V	24V	ON/OFF	IP20	1Z1120490	
	80W	100-240V	24V	ON/OFF	IP20	1Z1120440	
	20W	220-240V	24V	TRIAC/IGBT	IP20	1Z0240850.24	
	16W(15W)	220-240V(100-127V)	24V	DALI	IP20	1Z0241180.24	
	20W(15W)	220-240V(100-127V)	24V	PUSH	IP20	1Z0240870.24	
	12,5W	220-240V	250mA	TRIAC/IGBT	IP20	1Z0241280	
	4,2W	220-240V	250mA	TRIAC/IGBT	IP20	1Z2320010	
	13,5W(13,5W)	220-240V(110-127V)	250mA	DALI - PUSH - 1-10V	IP20	1Z0241270.250	
	17W	220-240V	350mA	TRIAC/IGBT	IP20	1Z0240850.350	
	17W(15W)	220-240V(100-127V)	350mA	DALI	IP20	1Z0241180.350	

DRIVERS


	Power	Input	Output	Dimming	Protection	Code	Price
	18W(15W)	220-240V(100-127V)	350mA	PUSH - 1-10V	IP20	1Z0240870.350	
	18W(18W)	220-240V(100-127V)	350mA	DALI - PUSH - 1-10V	IP20	1Z0240530.350	
	60W	220-240V	48V	DALI	IP20	1Z0830820	
	20W	220-240V	500mA	TRIAC/IGBT	IP20	1Z0240850.500	
	20W(15W)	220-240V(100-127V)	500mA	DALI	IP20	1Z0241180.500	
	20W(15W)	220-240V(100-127V)	500mA	PUSH	IP20	1Z0240840.500	
	20W(15W)	220-240V(100-127V)	500mA	PUSH - 1-10V	IP20	1Z0240870.500	
	25W(13,5W)	220-240V(110-127V)	500mA	DALI - PUSH - 1-10V	IP20	1Z0241270.500	
	17,5W	100-240V	5V	ON/OFF	IP20	1Z1120180	
	150W	100-240V	24V	1-10V	IP67	1Z1120500	
	60W	100-240V	24V	1-10V	IP67	1Z1120260	

DRIVERS





	Power	Input	Output	Dimming	Protection	Code	Price
	96W	100-240V	24V	1-10V	IP67	1Z1120540	
	25W	110-240V	24V	ON/OFF	IP67	1Z1120620	
	36W	110-240V	36V	ON/OFF	IP67	1Z1120590	
	150W	100-240V	48V	1-10V	IP67	1Z1120250	
	240W	100-240V	48V	1-10V	IP67	1Z1120390	
	320W	100-240V	48V	1-10V	IP67	1Z1120380	
	60W	100-240V	48V	ON/OFF	IP67	1Z1120640	
	80W	100-240V	48V	1-10V	IP67	1Z1120400	
	17W(15W)	220-240V(100-127V)	350mA	ON/OFF	IP68	1Z0240880	
	24W(15W)	220-240V(110-127V)	500mA	ON/OFF	IP68	1Z0241170	
	30W(15W)	220-240V(100-127V)	700mA	ON/OFF	IP68	1Z0241110	

COMMON ACCESSORIES

Power	Input	Output	Dimming	Protection	Code	Price
Controller Casambi - Radio signal 2.4 - 2.486 GHz						
	220-240V - 50Hz		DALI	IP20	1Z0400740	215,00 €
	220-240V - 50Hz		1-10 V	IP20	1Z0400660	215,00 €
(75W) 150W	(110V) 240V - 50/60Hz		TRIAC	IP20	1Z0400670	215,00 €




COMMON ACCESSORIES

Size	Cut-out	Finish	Code	Price
Plasterboard trapdoors / Botole in cartongesso				
 200x200 mm	205x205 mm	Standard	1A3780000.00.00	145,00 €
 400x400 mm	415x415 mm	Standard	1A3790000.00.00	175,00 €
Clamp / Bloccacavo				
 Ø 50x20 mm		Matt White	1A3270300.00.00	50,00 €
		Matt Black	1A3270400.00.00	50,00 €
Driver connector IP68 / Connettore driver IP68				
		Standard	1A1660000.00.00	25,00 €

SUSPENSION KITS

Recessed suspension kit

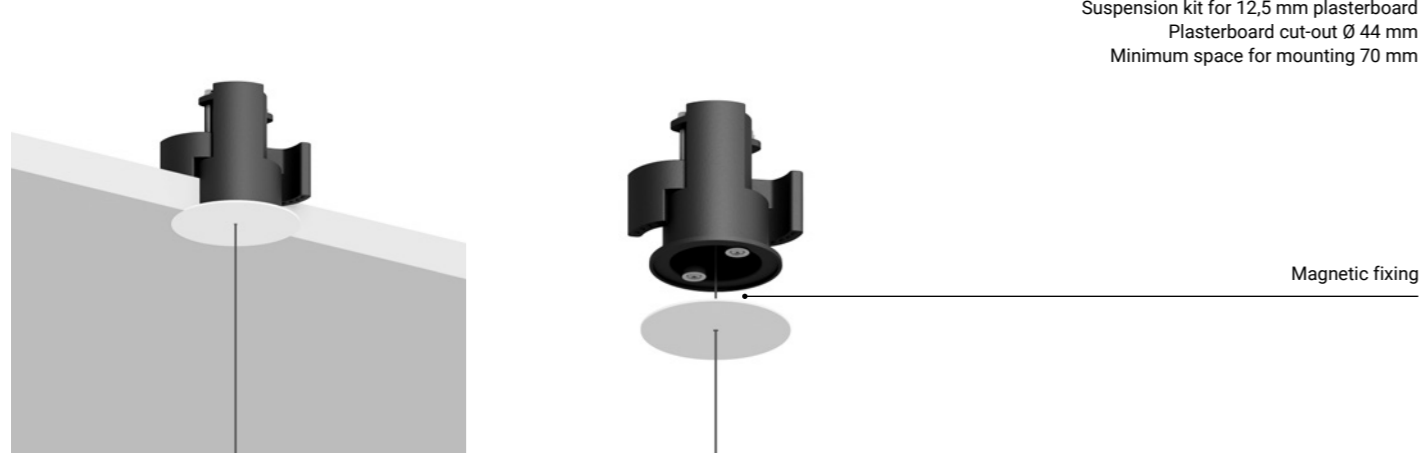


Version	Use	Product reference	Finish	Code	Price			
Recessed suspension kit.01	For suspension cables	REFLEX S 1	Matt White	1X0000300.01.00	140,00 €			
		REFLEX S 2						
		SHANGHAI 1						
		SHANGHAI 2						
		SOTTILE 1						
Recessed suspension kit.02	For electrical cables	SOTTILE 1 DE	Matt Black	1X0000400.01.00	140,00 €			
		SOTTILE 2						
		SOTTILE 2 DE						
		MAGIA				Matt White	1X0000300.02.00	140,00 €
		MAGIA				Matt Black	1X0000400.02.00	140,00 €
Recessed suspension kit.03	For suspension cables	MASAI 1	Matt White	1X0000300.03.00	140,00 €			
		MASAI 2						
		SPY DE				Matt Black	1X0000400.03.00	140,00 €
Recessed suspension kit.04	For electrical cables	ASINTOTO	Matt White	1X0000300.04.00	140,00 €			
		REFLEX S 2						
		SHANGHAI 2				Matt Black	1X0000400.04.00	140,00 €
SOTTILE 2								
Recessed suspension kit.05	For electrical cables	SOTTILE 2 DE	Matt White	1X0000300.05.00	140,00 €			
		LOUIS XIV 2				Matt Black	1X0000400.05.00	140,00 €




SUSPENSION KITS

Ceiling suspension kit

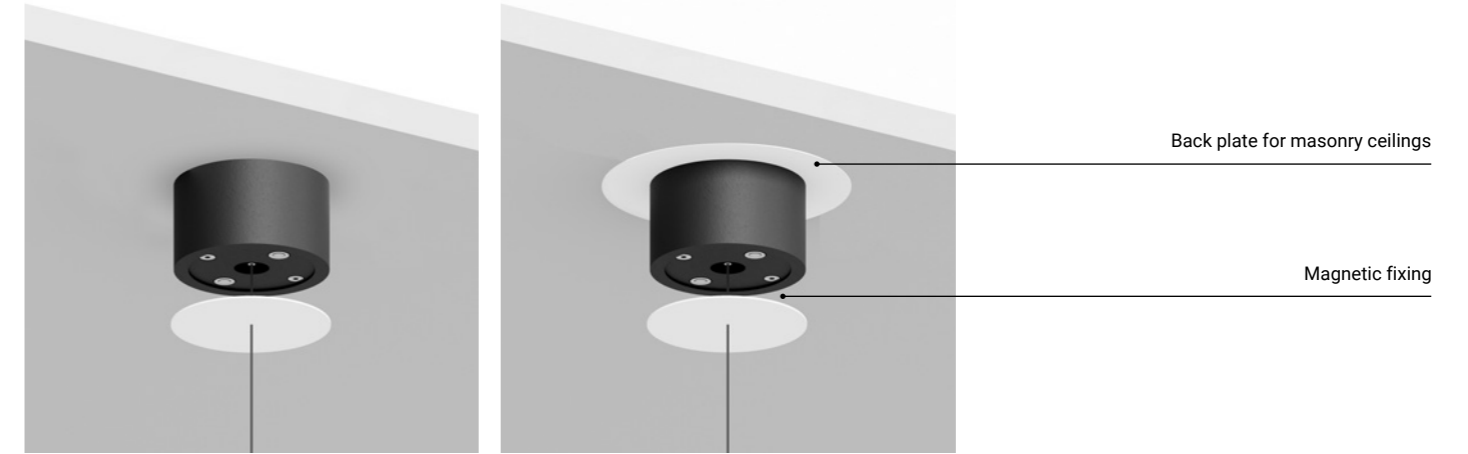

Version	Use	Product reference	Finish	Code	Price			
Ceiling suspension kit.01	For suspension cables	REFLEX S 1	Matt White	1X0010300.01.00	140,00 €			
		REFLEX S 2						
		SHANGHAI 1						
		SHANGHAI 2						
		SOTTILE 1						
Ceiling suspension kit.02	For electrical cables	SOTTILE 1 DE	Matt Black	1X0010400.01.00	140,00 €			
		SOTTILE 2						
		SOTTILE 2 DE						
		MAGIA				Matt White	1X0010300.02.00	140,00 €
		MAGIA				Matt Black	1X0010400.02.00	140,00 €
Ceiling suspension kit.03	For suspension cables	MASAI 1	Matt White	1X0010300.03.00	140,00 €			
		MASAI 2						
		SPY DE				Matt Black	1X0010400.03.00	140,00 €
Ceiling suspension kit.04	For electrical cables	ASINTOTO	Matt White	1X0010300.04.00	140,00 €			
		REFLEX S 2						
		SHANGHAI 2				Matt Black	1X0010400.04.00	140,00 €
SOTTILE 2								
Back plate	For masonry ceilings	SOTTILE 2 DE	Matt White	1X0050300.01.00	100,00 €			
		Back plate						



COMMERCIAL TERMS

General terms.

This price list replaces any other previous one.

Davide Groppi srl reserves the right to change its products without notice. In this case, the descriptions printed here are not binding.

The sizes are expressed in millimeters.

Prices are in Euro, excluding VAT.

Shipment.

Returned merchandise must be authorized in writing by Davide Groppi srl.

Any claim must be made in writing to Davide Groppi srl within 7 days of the delivery date. If not, will not be accepted.

Warranty.

All products are guaranteed for 24 months from the date of delivery.

The warranty is not valid for damage caused by third parties.

Any damage resulting from improper installation or changes to products cannot be considered the responsibility of Davide Groppi srl.

Rights.

No part of this price list may be reproduced or transmitted in any form or by any means: electronic, mechanical or otherwise, without the written permission of Davide Groppi srl.

Jurisdiction.

For any dispute, Piacenza, Italy, will be the court of jurisdiction.

Privacy.

Davide Groppi srl protects the confidentiality of personal data as provided to articles 12, 13 and 14 of the European Regulation n. 679/2016 (GDPR).

davidegroppi.com

Daide Groppi s.r.l.
Via Belizzi 20 / 22
29122 Piacenza - Italia
+39.0523.571590
info@davidegroppi.com

Daide Groppi s.r.l. © 2024
Company with sole shareholder under the direction and coordination of Dexelance