davide groppi

INDEX

WIRELESS	13	SUSPENSION	129	CEILING	275	OUTDOOR	419
35MM	15	CARTESIO	131	ASINTOTO	277	BELLADINOTTE	421
BUGIA	19	CATHODE	135	DOT PL 51	283	BUBKA	425
PoPuP	23	FOSBURY	141	MINI PL 51	287	BUBKA BOLLARD	429
POST PRANDIUM	27	LED IS MORE	145	NULLA PL	291	GRILLO	433
ТеТаТеТ	33	LOUIS XIV	151	PUNTO PL	295	IMU	437
TeTaTeT Flûte	39	MAGIA	157	PUNTO 2 PL	299	LENTA	441
VIS À VIS	43	MISS	169	SANMARTINO	303	NEURO OUTDOOR	445
		MOON	175	TRICK TRACK	307	NUIT	449
		NEURO	183			ORIGINE OUTDOOR	453
TABLE	47	OVO	187			OUT 44	457
ABA 45	49	OVONELPIATTO	191	RECESSED	311	OUT 58	461
ANIMA	53	REFLEX S	194	BUCO 58	313	OUT 100	465
CALVINO	57	SHANGHAI	199	DOT R	317	SAMPEI 440 OUTDOOR	469
FM	61	SIMBIOSI	203	MIRA R	321	SHOJI OUTDOOR	473
MOON T	65	SOTTILE	209	NULLA	325		
MORSETTO	69	SOTTOSOPRA	215	QUAD	333		
PIGRECO	75						
		WALL	219	SYSTEMS	337	LED MODULES	477
FLOOR	79	DOT P	221	ENDLESS	339	DRIVERS	479
ABA 120	81	EDISON'S NIGHTMARE	225	FLASH	357	COMMON ACCESSORIES	483
BANNER	85	FILM	229	INFINITO	373	SUSPENSION FIXING KIT	484
HASHI	89	FOLDER	233	ОНМ	387	CERTIFICATIONS	487
MASAI	93	MIRA	237	UTOPIA	401		
MOON F	99	MIRA MAGNETIC	241				
MOVIE	103	MORSETTO P	245				
ORIGINE	107	OZEN	249	TRACKS - PROFILES	405		
PABLO	111	OZEN VETRO	253	BINARIO TRIFASE	407		
Q	115	PIÙ	257	FRAMELESS	413		
SAMPEI	119	RAIL	261				
SHOJI	125	SPOT	265				
		TOAST	269				

INDEX

CODE SYSTEM

7

Our codification system consists of a fifteen-digit structure defined as follows:

1	A	3	0	0	0	3	0	0		2	7		0	0
	PF	RODUCT FAMI	ILY		FIN	IISH	INTERNAL	USE ONLY	-	COLOUR TE	MPERATURE	-	ELECTRII	FICATION

Finish

0	0	Standard
0	1	Polished Chrome
0	3	Matt White
0	4	Matt Black
0	8	Brushed Brass
1	0	Stainless Steel
1	3	Black Brushed Stainless Steel
1	4	Brushed Chrome
1	5	Natural Brass
1	8	Matt Gold
1	9	Polished Gold
2	6	Total Black
2	7	Gravity Black
2	8	Polished Black Chrome
2	9	Brushed Bronze
3	2	Copper Oxide
3	4	Matt White - Black Bicolour
3	6	Brushed Black
3	8	Blasted Inox
4	1	Stainless Brushed Brass

Colour temperature


0	0	Light source not included
2	2	2200K
2	7	2700K
3	0	3000K
9	6	2700 / 6500K (Tunable White)
9	8	RGBW (Warm White)
9	9	RGB

Electrification

0	0	ON/OFF
0	1	DALI
0	2	TRIAC/IGBT
0	3	1-10V
0	4	PUSH
0	5	DIM (DALI - PUSH - 1-10V - TRIAC)
0	6	Dimmer on board
0	7	DALI - PUSH - 1-10V
2	0	CLASS III
4	0	ENDLESS
4	1	ENDLESS CASAMBI

GUIDELINE TO PROPERLY READ THE CATALOGUE

	_					
General data on the product		MOON				Davide Groppi / 2005
Mounting - Lighting - Use - Material - Finish - Note		Material Finish Note	Diffuse / Indoor Japanese Pap .00 Standard			
		Note		on paralume con texture in carta giapponesi		
		:	122.	MOON 60 Max 15W - E27 100-240V - 50/60Hz Bulb not included ON/OFF C € IP20	Standard - ON/OFF	1A2820000.00.00
Versions specifications Technical data - Certifications - Codes	•		120	MOON 60 DE Max 15W - E27 + Max 10W - GU10 10x - GU10 Max 15W - E27 + Max 10W - GU10 Mount 10x - GU10	Standard - ON/OFF	1A2830000.00.00
			120	MOON 80 Max 15W-E27 100-240V-50V/60Hz Bulls not included ON/OFF C € IP20	Standard - ON/OFF	1A2840000.00.00
		2	733			
		Davide Groppi	120	MOON 120	1	MOON
				Moon 120 Max 2x25W - E27 100-240V - 50/60Hz Rulb not included	Standard - ON/OFF	1A2850000.00.00

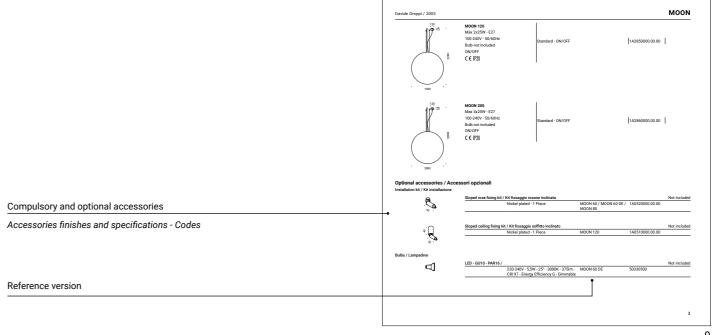

Reference version

PICTOGRAPHY

- Class II appliance: appliance whose protection against electric shock is not only relevant to the main insulation, but also includes additional safety measures, such as dual insulation or reinforced insulation. These measures do not include ground devices as protection and do not depend on the installation conditions.
 - Class III appliance: appliance whose safety against electric shock is based on safe extra low voltage power supply. Compliance with legislation is guaranteed only if the appliance is powered by a SELV safety transformer/driver in compliance with legislation in force. The appliance must not be connected to ground conductors.
 - Degree of protection against access of foreign bodies, dust and water.
 - Appliance with this symbol can only use low pressure bulbs or bulbs with safety glass.
- To prevent the risk of fire, maintain the minimum distance indicated from the bulb with lighting objects. This distance should be measured along
- Color Rendering Index: the degree of colour distortion under a given light source in comparison with a reference light source. The optimum colour rendition index is Ra = 100.

the optical axis of the appliance to the closest lighting object.

- The luminous flux, measured in lumen, indicates the quantity of light perceived by the human eye emitted by a light source. In Davide Groppi lights with an integrated module, the deliverd lumen flux is obtained from the photometric measurement. In lights with a lightbulb included, the luminous flux is indicated provided by the manufacturer of the lightbulb.
- Luminaire designed to be powered by ENDLESS system at 48 V DC.
 - Luminaire integrated with Casambi, the Bluetooth Low Energy (BLE) technology for lighting control.
 - Luminaire with Extradark comfort system. The Extradark system associates an optical TIR PMMA lens to an element that geometrically shields the light beam viewing angle to obtain highly uniform lighting and full beam control. The polished black light shield is used to control the mirror reflection of the light, perfectly controlling the unified glare rating (UGR* < 19).









Do not use cold light lamps.

11

WIRELESS



Those dear old slides. Nobody pays any attention to them anymore.

It's the smallest lamp in our collection.

It's an idea, a thought, a pendant, something you can wear.


The pulsating light and the images you choose to display on it make 35MM unique and exceptional.

Objects / Diffuse / Wireless

Material Metal - Polycarbonate

Finish .00 Standard

Note Slowly flashing light luminaire - White frame - Black back side - Customizable images not included.




35MM

0,3W

ON/OFF

Batteries 2 x CR2032 included

Standard - ON/OFF 1A2640000.00.00

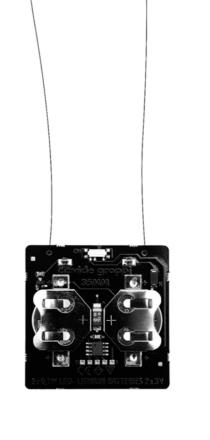



16 17



Davide Groppi / 2018

A lightweight and soft light. A lamp designed to enjoy wonderful diffuse light but without an electrical cable.

BUGIA Davide Groppi / 2018

Table / Diffuse / Wireless

Metal - Methacrylate Material Finish .18 Matt Gold

Matt white diffuser luminaire - Gold finish base - Battery life 9 hours. Note

BUGIA

2W

3000K - 120lm CRI >90

ON/OFF

Driver not included -USB cable included

Matt Gold - 3000K - ON/OFF

1A2351803.30.00

Optional accessories

Electrical power supply



Driver LED Not included Matt Black Input 110-240V - 50/60Hz -Output 5V DC - 2A - 10W - IP20 1Z0000088



USB to USB-C cable Included Matt Black Lenght 39.37" 1Z0000132





Davide Groppi / 2016


Light*Music*Wireless
Created to give you both light and music any place, at any time.
PoPuP accompanies you during your unforgettable moments.
The sounds it produces are dynamic and of excellent quality.
Light and sound can also be enjoyed separately.
Listen to the light.

PoPuP Davide Groppi / 2016

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .03 Matt White

Note Luminaire and acoustic diffuser with magnetic fixing base - Battery life: 12 hours for light only and 30 hours for audio only at medium volume.



PoPuP 2W 3000K - 183Im CRI >80 ON/OFF 5W Audio - 50-20000Hz -

Driver included

Matt White - 3000K - ON/OFF 1A2610303.30.00

Optional accessories

Chargers



Driver LED			Included
Matt Black	Input 110-240V - 50/60Hz - Output 10000mAh - 4,2-14V DC - 18W - IP20	1Z1530030	

Other accessories



Rechargeable battery		Included
Matt White	12V DC - NiMH 3700mAh	1A2620300.00.00





POST PRANDIUM

Davide Groppi / 2023

...During a meal with friends, a ladle is reused to scoop up the light and serve it onto the table.

A project from many years ago, today in a new wireless version.

Archiproducts Design Award 2023

POST PRANDIUM

Davide Groppi / 2023

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .01 Polished Chrome

Note Matt black base luminaire - Gold finish details - Battery life 9 hours.



POST PRANDIUM

2W 3000K - 171Im CRI >90 ON/OFF Driver not included -USB cable included

Polished Chrome - 3000K - ON/OFF 1A4550103.30.00

Optional accessories

Electrical power supply



 Driver LED
 Not included

 Matt Black
 Input 110-240V - 50/60Hz - Output 5V DC - 2A - 10W - IP20
 1Z0000088



 USB to USB-C cable
 Included

 Matt Black
 Lenght 39.37"
 1Z0000132



28 29





Davide Groppi / 2013

A timeless icon with an eye on the future.

Portable and rechargeable, the greatest expression of freedom.

With TeTaTeT, every table becomes a meeting place, a complete dining experience.

Its light caresses those it illuminates with pure emotion.

Equipped with Touch technology and a magnetic fixing base.

Mention of Honour XXIV Compasso d'Oro ADI Award, 2016

TeTaTeT Davide Groppi / 2013

Table / Direct / Wireless

Material ABS - Metal - Methacrylate

Finish .03 Matt White .04 Matt Black .18 Matt Gold

Note Magnetic fixing base luminaire - ON/OFF touch - Battery life 12 hours.



ТеТаТеТ	Matt White - 2700K - ON/OFF Matt White - 3000K - ON/OFF	1A0310303.27.00 1A0310303.30.00
2W 2700K - 165lm / 3000K - 178lm	Matt Black - 2700K - ON/OFF	1A0310403.27.00
CRI >90	Matt Black - 3000K - ON/OFF	1A0310403.30.00
ON/OFF	Matt Gold - 2700K - ON/OFF	1A0311803.27.00
Driver included	Matt Gold - 3000K - ON/OFF	1A0311803.30.00

Optional accessories

Chargers



Driver LED		Included
Matt Black	Input 110-240V - 50/60Hz - Output 6V DC - 1A - 6W - IP20	1Z0000073

Other accessories



Rechargeable ba	ttery	Not included
Matt White	4,8V DC - NiMH 4300mAh	1A0430300.00.00
Matt Black	4,8V DC - NiMH 4300mAh	1A0430400.00.00
Matt Gold	4,8V DC - NiMH 4300mAh	1A0431800.00.00



Table	Not included
Matt White	1A4020300.00.00
Matt Black	1A4020400.00.00







Davide Groppi / 2017

This is an evolution of our TeTaTeT lamp.
The lamp head is lightweight and appears to be floating in air. The transparent column brings to mind the glasses used in the classic "mise en place".

Magnetic fixing base.

TeTaTeT Flûte Davide Groppi / 2017

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .03 Matt White

Note Magnetic fixing base and stem luminaire - Transparent stem - Battery life 9 hours.

TeTaTeT Flûte

2W

2700K - 167lm / 3000K - 180lm

CRI >90 ON/OFF

Driver not included -USB cable included Matt White - 2700K - ON/OFF Matt White - 3000K - ON/OFF 1A2360303.27.00 1A2360303.30.00

Optional accessories

Electrical power supply



Driver LED		Not included
Matt Black	Input 110-240V - 50/60Hz - Output 5V DC - 2A - 10W - IP20	1Z0000088




	Included	
Matt Black Lenght 39.37" 1Z0000132		

Other accessories



Table	Not included
Matt White	1A4020300.00.00
Matt Black	1A4020400.00.00

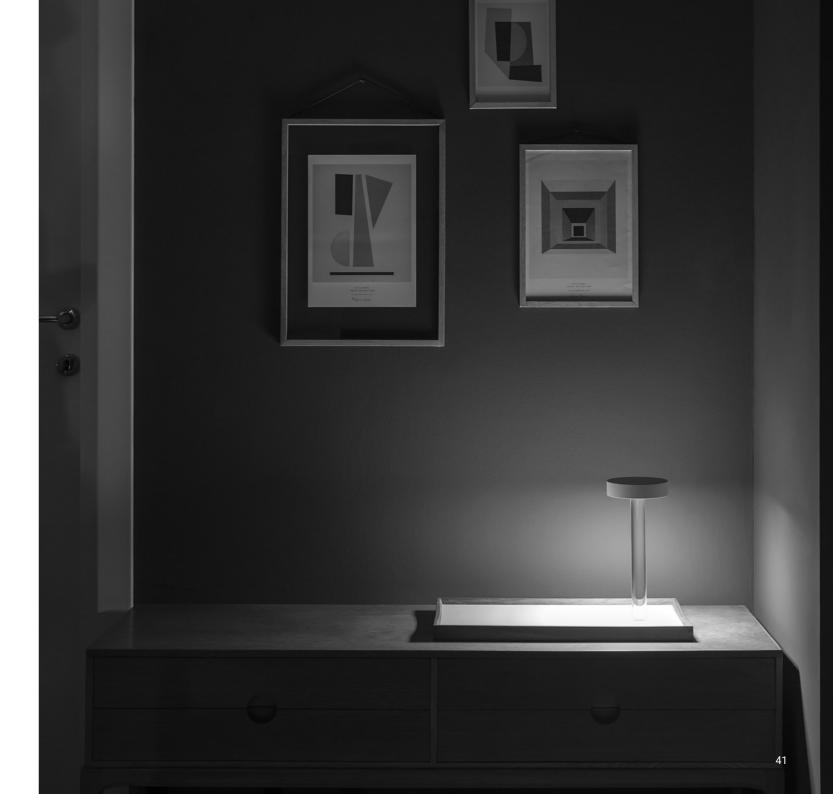



VIS À VIS

Michele Groppi / 2023

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .00 Standard

Note Magnetic fixing head luminaire - Transparent stem - Removable transparent disc with reflective effect - Battery life 9 hours - Indoor only -

Dry environment.



VIS A VIS

2W

2700K - 110lm / 3000K - 113lm

CRI >90

ON/OFF

Driver not included -USB cable included



Optional accessories

Electrical power supply



 Driver LED
 Not included

 Matt Black
 Input 110-240V - 50/60Hz - Output 5V DC - 2A - 10W - IP20
 1Z0000088

Standard - 2700K - ON/OFF

Standard - 3000K - ON/OFF

1A4530003.27.00

1A4530003.30.00




 USB to USB-C cable
 Included

 Matt Black
 Lenght 39.37"
 1Z0000132



TABLE




ABA 45 Omar Carraglia / 2007

Table / Diffuse / Indoor

Material Metal - Methacrylate
Finish .03 Matt White

Note White cable luminaire.



ABA 45

Max 10W - E26 120V - 60Hz Bulb not included Dimmer on board


Matt White - Dimmer on board

1A2700303.00.06





Davide Groppi - Giorgio Rava / 2021



ANIMA

Davide Groppi - Giorgio Rava / 2021

Table-Floor / Indirect / Indoor

Material ABS - Carbon Fiber - Metal

Finish .04 Matt Black

Note Luminaire with black cable (39.37") - ON/OFF and touch dimmable.



ANIMA

4W

5V DC

2700K - 575lm / 3000K - 589lm

CRI >80

Driver not included Driver on the wall

Dimmer on board

USB cable included

CUL US

Optional accessories

Electrical power supply



 Driver LED
 Not included

 Matt Black
 Input 110-240V - 50/60Hz - Output 5V DC - 2A - 10W - IP20
 1Z0000088

Matt Black - 2700K - Dimmer on board

Matt Black - 3000K - Dimmer on board

1A1090403.27.06

1A1090403.30.06



 USB to USB-C cable
 Included

 Matt Black
 Lenght 39.37"
 1Z0000132





Davide Groppi / 2018

Full and empty, shadow and light. A circular mirror to be positioned as you please, to both light and capture the surrounding space.

Born Series Award 2019


CALVINO Davide Groppi / 2018

Table / Indirect / Indoor

Material Brass - Metal - Methacrylate - Mirror

Finish .00 Standard

Note Adjustable luminaire - Blue back side mirror plate - Brass stem - Black base - Black cable.



CALVINO

18W

24V DC

CRI >90

2700K - 1275lm / 3000K - 1372lm

Standard - 2700K - Dimmer on board Standard - 3000K - Dimmer on board 1A2710003.27.06 1A2710003.30.06

Driver included Driver on the wall

Dimmer on board

Optional accessories

Electrical power supply



Driver LED		Not included
Matt Black	Input 110-240V - 50/60Hz - Output 24V DC - 18W - IP20	1Z0431020



An antenna of light.

Antennas are mysterious, absolute and intrinsically beautiful, because their essentialness expresses nothing more than their function.

A performing, adjustable and extremely comfortable light.

Selection for ADI Design Index 2023

Archiproducts Design Award 2022

FΜ Davide Groppi / 2022

Table / Direct / Indoor

Carbon Fiber - Metal Material .04 Matt Black Finish

Note Adjustable luminaire with black cable and Extradark comfort system.



FM

1,5W 5V DC

2700K - 154lm / 3000K - 179lm

CRI >90 UGR <19

Driver not included Driver on the wall Dimmer on board USB cable included

Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board

1A2440400.27.06 1A2440400.30.06

Optional accessories Electrical power supply



Driver LED Not included Input 110-240V - 50/60Hz -Output 5V DC - 2A - 10W - IP20 Matt Black 1Z0000088




USB to USB-C cable Included Matt Black Lenght 39.37" 1Z0000132



MOON T

Davide Groppi / 2019






MOON T Davide Groppi / 2019

Table / Diffuse / Indoor

Material Japanese Paper - Metal - PE

Finish .00 Standard

Note Shade with japanese paper texture luminaire - Gold finish base - White cable.



MOON T

Max 18W - E26 120V - 60Hz Bulb not included Dimmer on board


Standard - Dimmer on board

1A2690003.00.06





Davide Groppi / 2017




MORSETTO Davide Groppi / 2017

Table / Direct / Indoor

Material Metal

Finish .04 Matt Black

Note Adjustable luminaire with Extradark comfort system - Red lever clamp - Black cable.



MORSETTO

13W

24V DC

2700K - 765lm / 3000K - 823lm

CRI >90 UGR <19

Driver included

Dimmer on board

Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board 1A2520403.27.06 1A2520403.30.06

Optional accessories

Electrical power supply




Driver LED			
Matt Black	Input 110-240V - 50/60Hz - Output 24V DC - 18W - IP20	1Z0431020	







Omar Carraglia / 2019




PIGRECO Omar Carraglia / 2019

Table / Diffuse / Indoor

Material Glass - Oak wood
Finish .00 Standard

Note Frosted glass sphere luminaire - Oak wood base - Black cable.



PIGRECO 6,5W 24V DC 3000K - 450Im CRI >90

Driver included
Driver on the wall
Dimmer on board

Standard - 3000K - Dimmer on board 1A2

1A2600003.30.06

Optional accessories


Electrical power supply



Driver LED		Included
Matt Black	Input 110-240V - 50/60Hz -	1Z0431020
	Output 24V DC - 18W - IP20	



FLOOR



ABA 120 Omar Carraglia / 2007

Floor / Diffuse / Indoor

Material Metal - Methacrylate
Finish .03 Matt White

Note White cable luminaire.




ABA 120

Max 10W - E26 120V - 60Hz Bulb not included Dimmer on board

Matt White - Dimmer on board

1A2770303.00.06

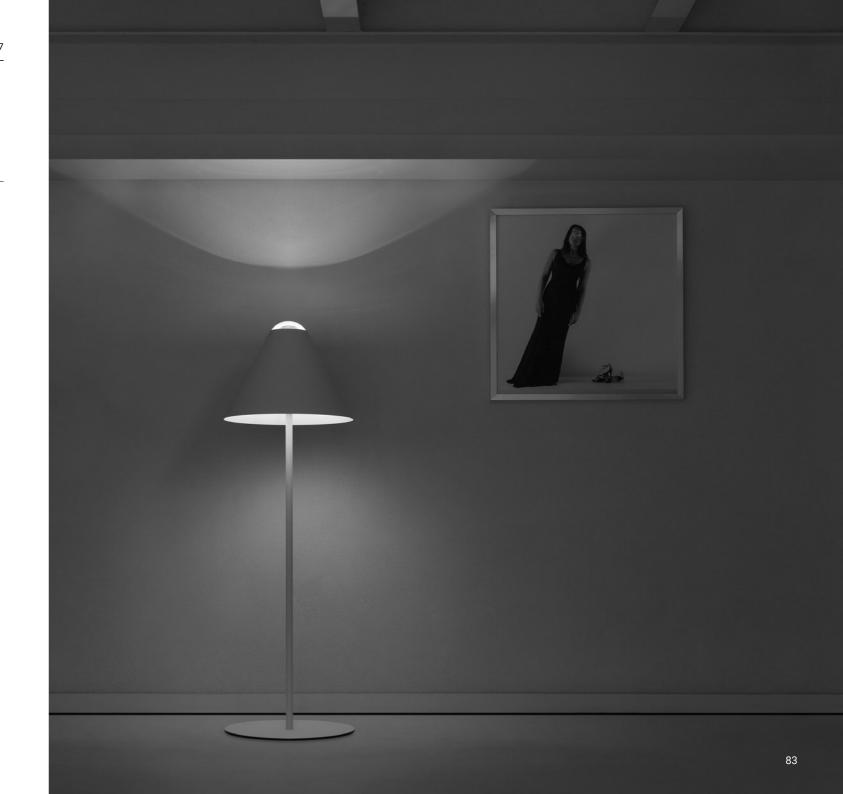



Mauro Ferrari / 2004


A solution that is part fixed and part mobile. The lamp is fixed to the wall, but is powered by a cable and normal electrical plug. Banner is one of our many solutions for bringing light where you need it, with the greatest freedom.

BANNER Mauro Ferrari / 2004

Floor / Indirect / Indoor

Metal - Polycarbonate Material

.03 Matt White Finish



BANNER

95W

120V - 60Hz

2700K - 11083lm / 3000K - 11918lm

CRI >80

Driver included Driver integrated

DALI

95W

CRI >80

Dimmer on board

BANNER

120V - 60Hz

2700K - 11083lm / 3000K - 11918lm

Driver included

Driver integrated

Matt White - 2700K - Dimmer on board Matt White - 3000K - Dimmer on board

Matt White - 2700K - DALI

Matt White - 3000K - DALI

1A1840303.27.06 1A1840303.30.06


1A1840303.27.01

1A1840303.30.01





Federico Delrosso / 2017




HASHI Federico Delrosso / 2017

Floor / Direct / Indoor

Material Metal - Methacrylate

Finish .04 Matt Black .18 Matt Gold

Note Adjustable luminaire with black cable and Extradark comfort system.



HASHI

15,5W 120V - 60Hz


2700K - 765lm / 3000K - 823lm

CRI >90 UGR <19 Driver included

Dimmer on board

Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board Matt Gold - 2700K - Dimmer on board Matt Gold - 3000K - Dimmer on board 1A2510403.27.06 1A2510403.30.06 1A2511803.27.06 1A2511803.30.06






MASAI Maurizio Mancini / 2015

Floor-Suspension / Indirect / Indoor

Material Brass - Methacrylate

Finish .03 Matt White .04 Matt Black .08 Brushed Brass

Note White celing rose luminaire - AISI 304 Stainless steel suspension cable - Transparent cable.



MASAI 1

Power kit with plug model
15,5W
120V - 60Hz
2700K - 600Im / 3000K - 619Im
CRI >90
Driver included
Dimmer on board

 Matt White - 2700K - Dimmer on board
 1A2720303.27.06


 Matt White - 3000K - Dimmer on board
 1A2720303.30.06

 Matt Black - 2700K - Dimmer on board
 1A2720403.27.06

 Matt Black - 3000K - Dimmer on board
 1A2720403.30.06

 Brushed Brass - 2700K - Dimmer on board
 1A2720803.27.06

 Brushed Brass - 3000K - Dimmer on board
 1A2720803.30.06



MASAI 2

Remote power supply model 13W 120V - 60Hz 2700K - 600Im / 3000K - 619Im CRI >90 Driver included

Dimmer on board

 Matt White - 2700K - Dimmer on board
 1A2720303.27.20

 Matt White - 3000K - Dimmer on board
 1A2720303.30.20

 Matt Black - 2700K - Dimmer on board
 1A2720403.27.20

 Matt Black - 3000K - Dimmer on board
 1A2720403.30.20

 Brushed Brass - 2700K - Dimmer on board
 1A2720803.27.20

 Brushed Brass - 3000K - Dimmer on board
 1A2720803.30.20

Maurizio Mancini / 2015

Compulsory accessories

Electrical power supply



Driver LED				Not included
220-240V(100-127V)	24V/22W(12W)/IP20/ON/OFF	MASAI 2	1Z0240410	

MASAI

Suspension fixing kit - See page 484



Dimmable controller				Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	MASAI 2	1Z0000034	

Optional accessories

Installation kit



Sloped ceiling fixing kit	Not included
Nickel plated - 1 Piece	1A0510000.00.00
·	



Recessed fixing kit for 0.49" plasterboard		Not included
Matt White	For suspension cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000300.03.00
Matt Black	For suspension cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000400.03.00



Ceiling fixing kit	
For suspension cables - 1 Piece	1X0010300.03.00
For suspension cables - 1 Piece	1X0010400.03.00
	<u>'</u>



Wall back plate			Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00	

Suspension kit



304 Stainless steel suspension cable	Not included
Lenght 393-70"	1A1680000.00.00

94 95





Davide Groppi / 2023

Moon was created from the dream of bringing the moon inside your own home.

The hand-made Japanese paper surface makes every lamp unique.

Suspension and floor versions available.

MOON F Davide Groppi / 2023

Floor / Diffuse / Indoor

Japanese Paper - PE Material

.00 Standard Finish

Shade with japanese paper texture luminaire. Note




MOON 80 F

Diameter 30.71" Max 25W - E26 120V - 60Hz Bulb not included Dimmer on board

Moisture barrier bag included

Standard - Dimmer on board

1A4880003.00.06



MOON 120 F

Diameter 47.24" Max 2x25W - E26 120V - 60Hz Bulb not included Dimmer on board Moisture barrier bag and

wooden crate included

Standard - Dimmer on board

1A4890003.00.06

Optional accessories

Other accessories

Moisture barrier ba	ag			Included
	Packaging for air and sea shipping	MOON 120 F	49860020	
Wooden crate				Included
	Packaging for air and sea shipping	MOON 120 F	49860010	





Omar Carraglia / 2005


To "play" with the light. A RGBW system lets you create all the light of the world. To feel the light and to live it in all its spectrum. MOVIE Omar Carraglia / 2005

Floor / Indirect / Indoor

Material Metal - Polycarbonate

Finish .03 Matt White .13 Black Brushed Stainless Steel

Note RGBW wireless control luminaire - Black cable.



MOVIE


80W 120V - 60Hz

2700K - 2832lm CRI >90

Driver included Driver integrated Dimmer on board

RGBW wireless control

Matt White - RGBW - Dimmer on board | 1A2740303.98.06 | Black Brushed Stainless Steel - RGBW - Dimmer on board | 1A2741303.98.06 |

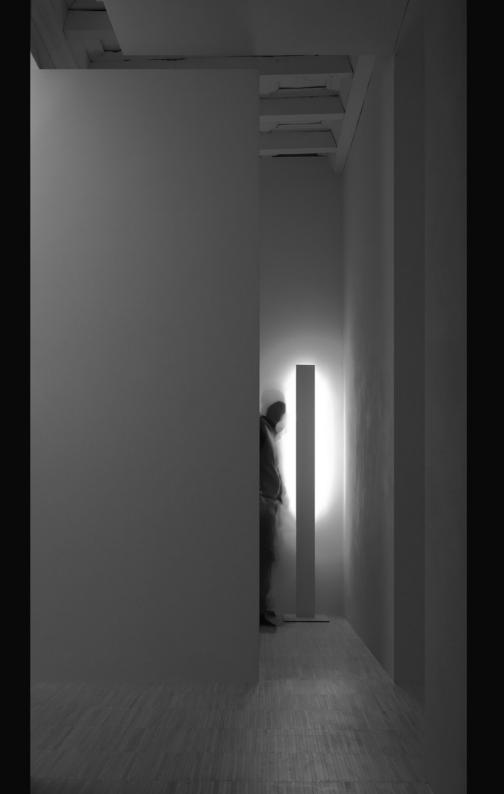



Davide Groppi - Giorgio Rava / 2020

From the Latin "origo", start, birth, source. It appears like a bud emerging from the ground and soaring upwards towards the sky, a stem that becomes increasingly thinner. Mysterious and enigmatic, it combines the fascination of the unknown with the pleasure of a sophisticated and elegant ambient light. Origine sculpts and enhances every environment with its indirect light, which is intentionally non-invasive, graphic and fascinating.

Available in 3 different heights and in an outdoor version.

AZ Award 2021 and People's Choice Archiproducts Design Award 2020 ORIGINE Davide Groppi - Giorgio Rava / 2020

Floor / Indirect / Indoor

Material Fiberglass - Metal
Finish .04 Matt Black

Note Black cable luminaire.



ORIGINE 290

Height 106.30" 25W

24V DC

2700K - 1926lm / 3000K - 2075lm

CRI >80

Driver included

Dimmer on board

CULUS

Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board 1A2300403.27.06 1A2300403.30.06



15.57"

ORIGINE 390

Height 145.67"

30W

24V DC

2700K - 2843lm / 3000K - 3063lm

CRI >80

Driver included
Dimmer on board

CUL)US

Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board 1A2310403.27.06 1A2310403.30.06



ORIGINE 490

Height 185.04" 35W

24V DC

4V DC

2700K - 3760lm / 3000K - 4051lm


CRI >80

Driver included Dimmer on board

C UL US

Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board 1A2320403.27.06 1A2320403.30.06






PABLO Davide Groppi / 2015

Floor / Diffuse / Indoor

Material Metal - Methacrylate
Finish .00 Standard

Note RGB wireless control luminaire - White panel - Transparent cable.



PABLO

70W

120V - 60Hz Driver included Dimmer on board

Dimmer on board RGB wireless control Standard - RGB - Dimmer on board

1A2730003.99.06





Alberto Zattin / 2000

A piece of architecture to be used in space.

A concrete cube that allows you to understand volumes and architecture in an unusual and unprecedented way.

Outdoor version available.

Q Alberto Zattin / 2000

Floor / Direct / Indoor


Material Cement - Metal
Finish .00 Standard

Note Cement luminaire - Black cable.

3.83. 6.69...688 Max 10W - GU10 120V - 60Hz Bulb not included ON/OFF

Standard - ON/OFF

1A2760003.00.00

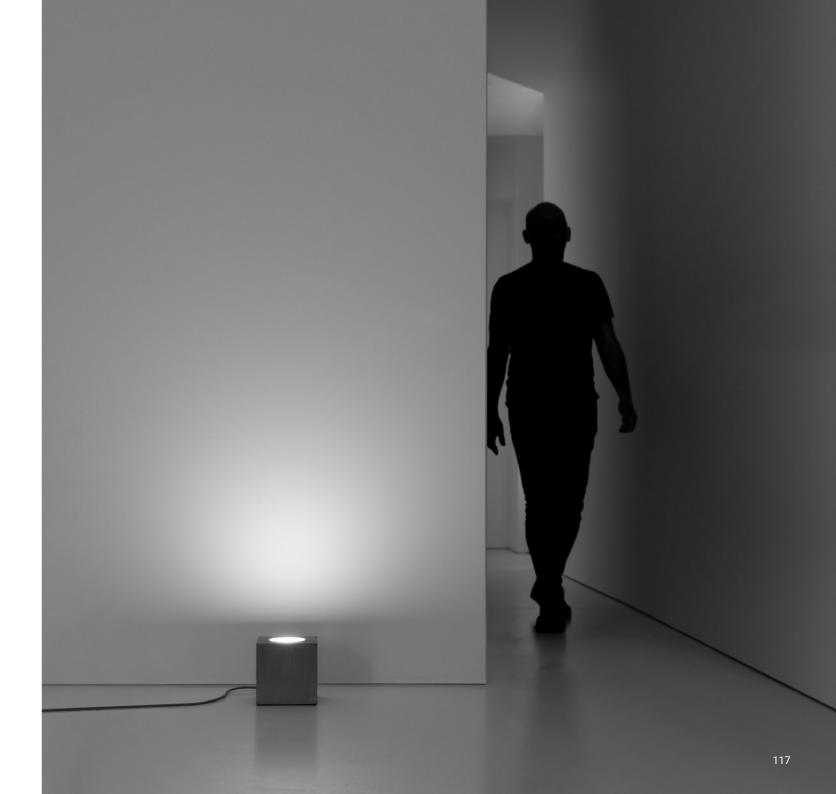



Enzo Calabrese - Davide Groppi / 2011

A special project, an authentic ready-made.



which brings to mind the subtle branches of a willow tree
or bamboo canes floating on a light breeze.

Sampei is an unexpected gift, it is the magic of looking up, using light as a hook,
and being amazed by so much weightlessness.

The light is the fisherman's line, catching faces, gazes, people.
Available in 4 different heights and in an outdoor version.

XXIII Compasso d'Oro ADI Award 2014

Elle Deco International Design Award 2011


Obtained from a flexible fishing rod, it is a delicate and elegant sign,

Floor / Direct / Indoor

Material Fiberglass - Metal

.03 Matt White Finish .04 Matt Black


Note Adjustable luminaire - White finish luminaire with white cable and black finish luminaire with black cable.



SAMPEI 230

Height 84.65" 17W 120V - 60Hz 2700K - 1370lm / 3000K - 1456lm CRI >90 Driver included Dimmer on board CULUS


1A3730303.27.06 Matt White - 2700K - Dimmer on board Matt White - 3000K - Dimmer on board 1A3730303.30.06 Matt Black - 2700K - Dimmer on board 1A3730403.27.06 1A3730403.30.06 Matt Black - 3000K - Dimmer on board



SAMPEI 260

Height 92.52" 17W 120V - 60Hz 2700K - 1370lm / 3000K - 1456lm CRI >90 Driver included Dimmer on board

Matt White - 2700K - Dimmer on board 1A3740303.27.06 1A3740303.30.06 Matt White - 3000K - Dimmer on board Matt Black - 2700K - Dimmer on board 1A3740403.27.06 Matt Black - 3000K - Dimmer on board 1A3740403.30.06




SAMPEI 290

CUL) US

Height 102.36" 17W 120V - 60Hz 2700K - 1370lm / 3000K - 1456lm CRI >90 Driver included Dimmer on board

1A3750303.27.06 Matt White - 2700K - Dimmer on board Matt White - 3000K - Dimmer on board 1A3750303.30.06 Matt Black - 2700K - Dimmer on board 1A3750403.27.06 Matt Black - 3000K - Dimmer on board 1A3750403.30.06



SAMPEI 440

Height 153.54" 17W 120V - 60Hz CRI >90 Driver included

2700K - 1491lm / 3000K - 1584lm Dimmer on board

Matt White - 2700K - Dimmer on board 1A3760303.27.06 Matt White - 3000K - Dimmer on board 1A3760303.30.06 Matt Black - 2700K - Dimmer on board 1A3760403.27.06 Matt Black - 3000K - Dimmer on board 1A3760403.30.06

Optional accessories

Other accessories



Accessory holder + Soft filter + Honeycomb louvre	Hot molacca
Matt Black 1X0070400.04.00	



Accessory holder + Elliptical filter Not included Matt Black 1X0070400.05.00



Blue filter Not included Standard 1X0070000.06.00



Red filter Not included 1X0070000.07.00 Standard



Yellow filter Not included Standard 1X0070000.08.00





Exploiting the technique used by Paola Lenti for her beautiful works, we designed a nylon lampshade, strictly hand-stitched and hand-made.

Outdoor version available.


SHOJI Davide Groppi - Paola Lenti / 2013

Floor / Diffuse / Indoor

Material Metal - PBT - Polycarbonate

Finish .00 Standard

Note White shade luminaire - Black leg base - Black cable.



SHOJI

Max 18W - E26 120V - 60Hz Bulb not included Dimmer on board

Standard - Dimmer on board

1A2780003.00.06



SUSPENSION



Davide Groppi / 2018

A thin, circular mirror is suspended to provide light, combining both direct and indirect lighting.

A sophisticated clamping system is used to position the disc wherever you want, without the need for wall or ceiling wires.

131

CARTESIO Davide Groppi / 2018

Suspension / Indirect-Direct / Indoor


Material Metal - Methacrylate Finish .00 Standard

Note

Dual emission luminaire - Stainless steel plate with mirror finish - Red back side - White ceiling rose - 304 Stainless steel suspensione cables -

Standard - 3000K - 1-10V

White cable.



CARTESIO

Diameter 23.62" - Dual emission 15,5W


120V - 60Hz

3000K - Down 300lm - CRI >80

3000K - Up 930lm - CRI >90

Driver included Driver integrated

1-10V



CARTESIO 90

Diameter 35.43" - Dual emission 15,5W

Driver integrated

120V - 60Hz

3000K - Down 300lm - CRI >80

3000K - Up 930lm - CRI >90

Driver included

1-10V

1A0070003.30.03 Standard - 3000K - 1-10V

1A3190003.30.03



132



Omar Carraglia / 2015

A scientific looking bulb made from mouth blown glass.
The shape brings to mind a light bulb that was never born. Think steampunk: situations in which instruments were inspired by the rudiments of electricity.

The classic light bulb that has no future becomes a wonderful device made of luminous diodes.

What would the past have looked like if the future had arrived first?

Luminaire designed to be powered by Endless system.

CATHODE

Omar Carraglia / 2015

Omar Carraglia / 2015

CATHODE

Suspension / Diffuse / Indoor

Material Blown glass - Metal

.03 Matt White Finish .08 Brushed Brass

Note

White finish luminaire with white ceiling rose and white cable - Brushed brass finish luminaire with black ceiling rose and black cable -CATHODE 2: installation on plasterboard with flat rose - Magnetic fixing - Single ceiling rose for multiple luminaires on request.

5.31." 5.31."	
	118.11"
3.66"	

CATHODE 1

Ceiling rose model 5.6W

120V - 60Hz

2700K - 264lm / 3000K - 284lm

CRI >90

Driver included Driver integrated

ON/OFF

CULUS



CATHODE 1

Ceiling rose model

5.6W

120V - 60Hz

2700K - 264lm / 3000K - 284lm

CRI >90

Driver included Driver integrated

DALI



CATHODE 1

Ceiling rose model

5,6W

120V - 60Hz

2700K - 264lm / 3000K - 284lm

CRI >90

Driver included Driver integrated

1-10V

CUL US

1A2980303.27.00 Matt White - 2700K - ON/OFF Matt White - 3000K - ON/OFF 1A2980303.30.00 Brushed Brass - 2700K - ON/OFF 1A2980803.27.00 1A2980803.30.00 Brushed Brass - 3000K - ON/OFF

1A2980303.27.01 Matt White - 2700K - DALI Matt White - 3000K - DALI 1A2980303.30.01 1A2980803.27.01

Brushed Brass - 3000K - DALI

Brushed Brass - 2700K - DALI

1A2980303.27.03 Matt White - 2700K - 1-10V 1A2980303.30.03 Matt White - 3000K - 1-10V Brushed Brass - 2700K - 1-10V 1A2980803.27.03 1A2980803.30.03 Brushed Brass - 3000K - 1-10V

1A2980803.30.01

118.11"

5.77.

118.11"

5.31"

CATHODE 1

Ceiling rose model

5.6W

120V - 60Hz 2700K - 264lm / 3000K - 284lm

CRI >90 Driver included Driver integrated

PUSH

Brushed Brass - 2700K - PUSH Brushed Brass - 3000K - PUSH

Matt White - 2700K - PUSH

Matt White - 3000K - PUSH

1A2980303.27.04 1A2980303.30.04 1A2980803.27.04 1A2980803.30.04

c UL us

CATHODE 2

Remote power supply model 4W Max 350mA DC 2700K - 264lm / 3000K - 284lm CRI >90

Driver not included

Matt White - 2700K 1A2990303.27.20 Matt White - 3000K 1A2990303.30.20 Brushed Brass - 2700K 1A2990803.27.20 Brushed Brass - 3000K 1A2990803.30.20

Compulsory accessories

12.60"

Electrical power supply



Driver LED			Not included	
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	CATHODE 2	1Z0241180.350	



Driver LED Not included 220-240V(100-127V) 350mA/18W(15W)/IP20/PUSH - 1-10V CATHODE 2 1Z0240870.350

136





Davide Groppi / 2014

A lamp that interprets the classic theme of decentralization. An acrobatic and apparently precarious presence, bringing light where you prefer it, starting from a simple wall socket.

AZ Award 2016


FOSBURY Davide Groppi / 2014

Floor-Suspension / Direct / Indoor

Material Metal

.04 Matt Black Finish

Dual emission luminaire with Extradark comfort system - Indirect blue light (up) - 304 Stainless steel suspension cable - Black cable. Note



FOSBURY

Dual emission 15W 120V - 60Hz

2700K - Down 525lm - Up 59lm / 3000K - Down 560lm - Up 59lm

CRI >90 UGR <19

Driver included Driver integrated

ON/OFF



Optional accessories

Installation kit

Suspension fixing kit - See page 484

Matt Black - 2700K - ON/OFF

Matt Black - 3000K - ON/OFF



Sloped ceiling fixing kit	Not included
Nickel plated - 1 Piece	1A0510000.00.00

1A2590403.27.00 1A2590403.30.00



Recessed fixing kit for 0.49" plasterboard		Not included
Matt White	For suspension cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000300.03.00
Matt Black	For suspension cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000400.03.00



Ceiling fixing kit		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.03.00
Matt Black	For suspension cables - 1 Piece	1X0010400.03.00



Wall back plate		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00



A tribute to Mies van der Rohe and his Less is More.

The project represents a light icon in a LED key, with a peculiar attention to energy savings and the quality of light.

LED IS MORE Davide Groppi / 2011


Suspension / Diffuse / Indoor

Material Metal - Methacrylate
Finish .03 Matt White

Note White ceiling rose luminaire - White cable - Single ceiling rose for multiple luminaires on request.






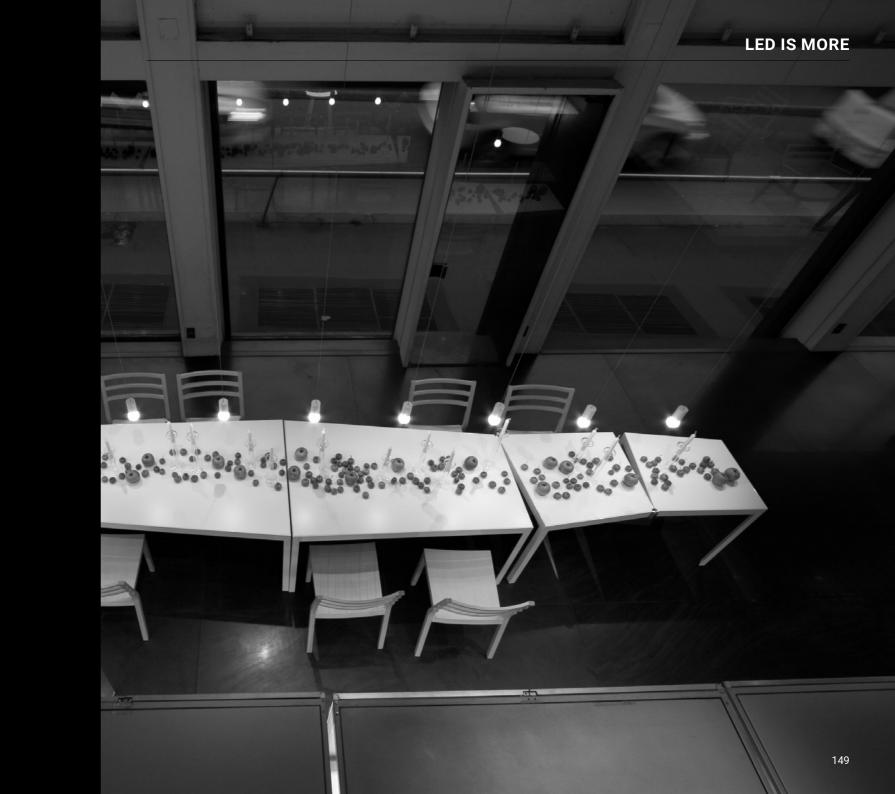

LOUIS XIV

Davide Groppi / 2023



LOUIS XIV

Davide Groppi / 2023


Suspension / Indirect-Direct / Indoor

Material

Glass - Metal

Finish .19 Polished Gold

Dual emission with separated switch luminaire.




LOUIS XIV 1

Ceiling rose model 30W 120V - 60Hz 2700K - Up 1650lm - Down 410lm / 3000K - Up 1650lm - Down 410lm

Polished Gold - 2700K - TRIAC/IGBT Polished Gold - 3000K - TRIAC/IGBT 1A4361903.27.02 1A4361903.30.02

Davide Groppi / 2023



LOUIS XIV 1


CRI >90 Driver included Driver integrated TRIAC/IGBT

Ceiling rose model 30W 120V - 60Hz

2700K - Up 1650lm - Down 410lm / 3000K - Up 1650lm - Down 410lm

CRI >90 Driver included Driver integrated 1-10V Polished Gold - 2700K - 1-10V Polished Gold - 3000K - 1-10V

)V)V



LOUIS XIV 2

Driver not included

Remote power supply model 30W Max 450mA DC 2700K - Up 1650lm - Down 410lm / 3000K - Up 1650lm - Down 410lm CRI >90

Polished Gold - 2700K Polished Gold - 3000K 1A4361903.27.20 1A4361903.30.20

1A4361903.27.03

1A4361903.30.03

Compulsory accessories

Electrical power supply



Driver LED				Not included
120-277V	500mA/30W/IP20/TRIAC - 1-10V	LOUIS XIV 2	1Z2020050.500	


LOUIS XIV

Optional accessories

Installation kit



			Suspension fixing kit - See page 484
Recessed fixing I	kit for 0.49" plasterboard	Not included	
Matt White	For elettrical cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	LOUIS XIV 2	1X0000300.05.00
Matt Black	For elettrical cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	LOUIS XIV 2	1X0000400.05.00

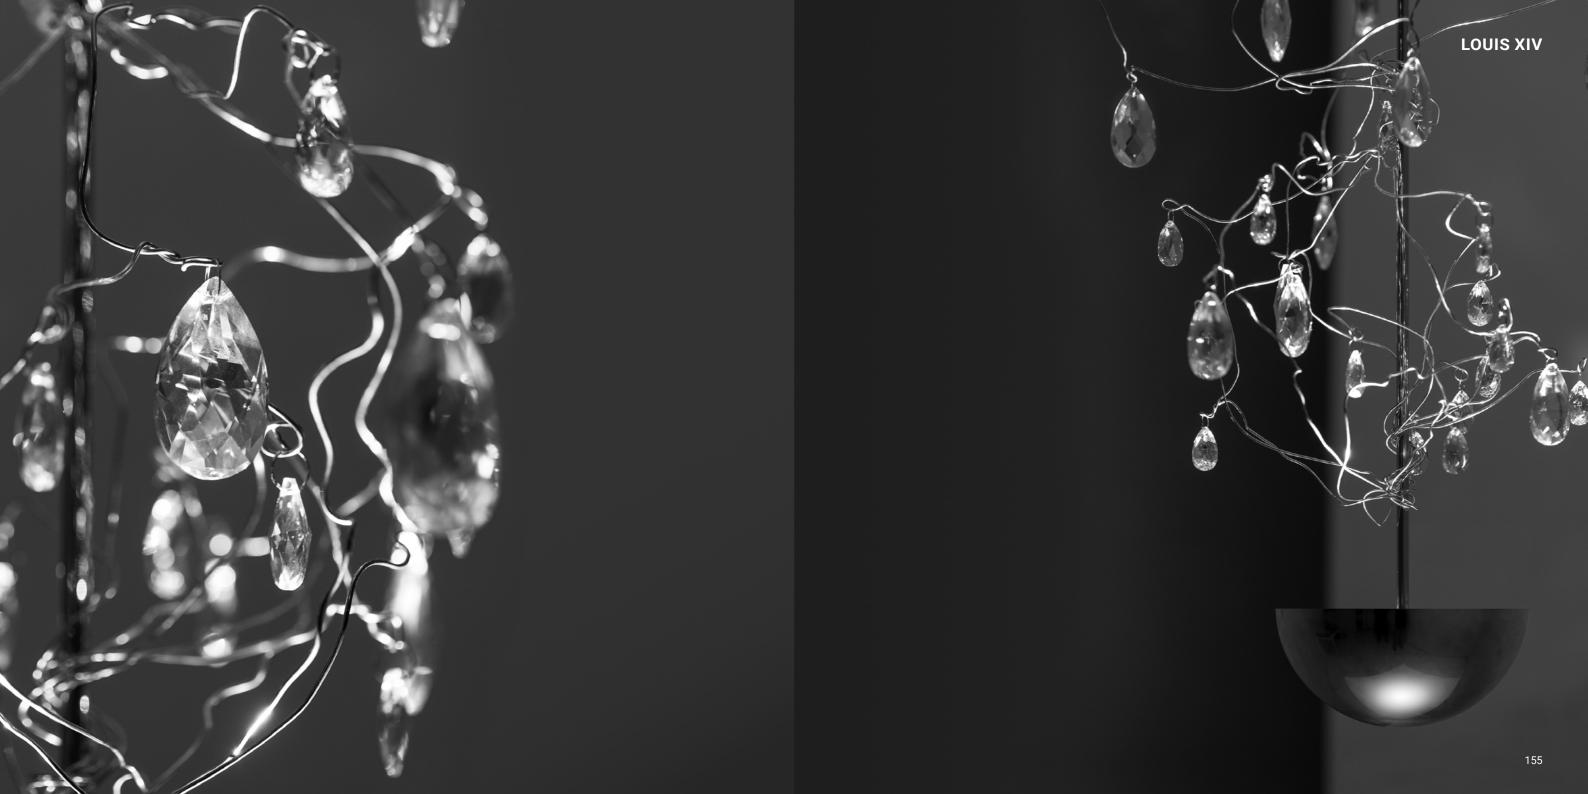



Michele Groppi / 2023

Archiproducts Design Award 2023

Light and transparency are the true stars of this project.


We have always liked to think heretically, evoking mystery, magic and seduction.

Magia is the new modular suspension lighting system that can be adapted to suit the different heights of the rooms and can generate direct and indirect light with the 360° adjustable module.

In this case, the lens is not used to focus, but to modify the vision and perception of the object.


The effect of the convex lens conceals the part of the light beam and produces the lightest effect of suspension and inconsistency.









Multiple installation with ceiling rose






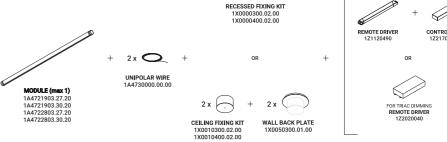

Multiple installation with recessed fixing kit or ceiling fixing kit

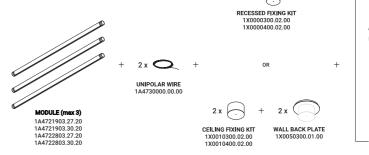




Material

Finish .19 Polished Gold .28 Polished Black Chrome

Note

Adjustable modular system.



MAGIA - MODULE

Driver not included

19W 24V DC 2700K - 1272lm / 3000K - 1312lm CRI >90

1 Piece - Max 60V DC

1A4721903.27.20 Polished Gold - 2700K 1A4721903.30.20 Polished Gold - 3000K 1A4722803.27.20 Polished Black Chrome - 2700K Polished Black Chrome - 3000K 1A4722803.30.20

Compulsory accessories

Installation kit



Max 3 modules

1A4730000.00.00



-		
Wire guide		Not included



wire guide		14
Matt Black	1 Piece	1A3040400.00.00



Recessed fixing k	it for 0.49" plasterboard	Not included
Matt White	For elettrical cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000300.02.00
Matt Black	For elettrical cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000400.02.00



Ceiling fixing kit		No	tincluded
Matt White	For elettrical cables - 1 Piece	1X0010300.02.00	
Matt Black	For elettrical cables - 1 Piece	1X0010400.02.00	




Wall back plate			Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00	


Compulsory accessories

Michele Groppi / 2023

Electrical power supply



Ceiling rose				Not included
Matt White	Input 120V - 60Hz - Output 24V - 21W - IP20 - DALI - PUSH - 1-10V	Max 1 module	1A4780303.00.07	



Ceiling rose				Not included
Matt White	Input 120V - 60Hz - Output 24V - 60W - IP20 - DALI - PUSH - 1-10V	Max 3 modules	1A4740303.00.07	



Driver LED				
100-240V	24V/50W/IP20/ON/OFF	Max 1 module	1Z1120490	



Driver LED				
100-240V	24V/80W/IP20/ON/OFF	Max 3 modules	1Z1120440	




Driver LED				
120-277V	24V/60W/IP20/TRIAC - 1-10V	Max 1 module	1Z2020040	




Driver LED				Not included
120-277V	24V/96W/IP20/TRIAC - 1-10V	Max 3 modules	1Z2020060	




Controller		Not included
Matt Black	DALI - PUSH - 0/1-10V - IP20	1Z2170020




Example of single installation with ceiling rose




Example of multiple installation with ceiling rose




Example of single installation with recessed fixing kit




Example of multiple installation with recessed fixing kit



Example of single installation with ceiling fixing kit



Example of multiple installation with ceiling fixing kit

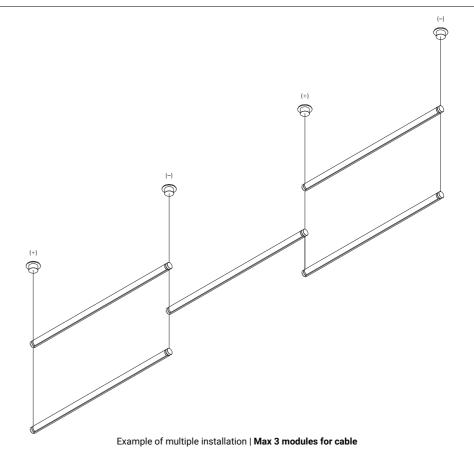

So slim and essential...
The fundamental concept of this project is minimalism.
A small tube that lights the table with wonder.
A real dual project: sign and light.
Luminaire designed to be powered by Endless system.

MISS

MISS Omar Carraglia / 2006

Suspension / Direct / Indoor

Material Metal

Finish .03 Matt White .04 Matt Black .08 Brushed Brass .26 Total Black

Note

White and black finish luminaire with white ceiling rose and white cable - Brushed brass and total black finish luminaire with black ceiling rose and black cable - MISS 2: flat rose - Magneting fixing - Installation on plasterboard - Single ceiling rose for multiple luminaires on request.

25.7	31."
	118.11"
29.53"	98"

MISS 1

Ceiling rose model 5.6W 120V - 60Hz 2700K - 290lm / 3000K - 310lm CRI >90 Driver included Driver integrated ON/OFF

Matt White - 2700K - ON/OFF Matt White - 3000K - ON/OFF Matt Black - 2700K - ON/OFF Matt Black - 3000K - ON/OFF Brushed Brass - 2700K - ON/OFF

Brushed Brass - 3000K - ON/OFF

Total Black - 2700K - ON/OFF

Total Black - 3000K - ON/OFF

1A2960303.27.00 1A2960303.30.00 1A2960403.27.00 1A2960403.30.00 1A2960803.27.00 1A2960803.30.00 1A2962603.27.00 1A2962603.30.00

Omar Carraglia / 2006

CUL US

MISS 1

Ceiling rose model 5.6W 120V - 60Hz 2700K - 290lm / 3000K - 310lm CRI >90 Driver included Driver integrated DALI

Matt White - 2700K - DALI Matt White - 3000K - DALI Matt Black - 2700K - DALI Matt Black - 3000K - DALI Brushed Brass - 2700K - DALI Brushed Brass - 3000K - DALI Total Black - 2700K - DALI

Total Black - 3000K - DALI

1A2960303.27.01 1A2960303.30.01 1A2960403.27.01 1A2960403.30.01 1A2960803.27.01 1A2960803.30.01 1A2962603.27.01 1A2962603.30.01



MISS 1

CUL US

Ceiling rose model 5,6W 120V - 60Hz 2700K - 290lm / 3000K - 310lm CRI >90 Driver included Driver integrated 1-10V CUL US

Matt White - 2700K - 1-10V Matt White - 3000K - 1-10V Matt Black - 2700K - 1-10V Matt Black - 3000K - 1-10V Brushed Brass - 2700K - 1-10V Brushed Brass - 3000K - 1-10V Total Black - 2700K - 1-10V Total Black - 3000K - 1-10V

1A2960303.27.03 1A2960303.30.03 1A2960403.27.03 1A2960403.30.03 1A2960803.27.03 1A2960803.30.03 1A2962603.27.03 1A2962603.30.03



MISS 1

Matt White - 2700K - PUSH 1A2960303.27.04 Ceiling rose model 1A2960303.30.04 Matt White - 3000K - PUSH 5.6W Matt Black - 2700K - PUSH 1A2960403.27.04 120V - 60Hz 1A2960403.30.04 Matt Black - 3000K - PUSH 2700K - 290lm / 3000K - 310lm Brushed Brass - 2700K - PUSH 1A2960803.27.04 CRI >90 Brushed Brass - 3000K - PUSH 1A2960803.30.04 Driver included 1A2962603.27.04 Total Black - 2700K - PUSH Driver integrated Total Black - 3000K - PUSH 1A2962603.30.04 **PUSH** c UL us



MISS 2

Remote power supply model 4W Max 350mA DC 2700K - 290lm / 3000K - 310lm CRI >90 Driver not included c UL) us

1A2970303.27.20 Matt White - 2700K Matt White - 3000K 1A2970303.30.20 Matt Black - 2700K 1A2970403.27.20 Matt Black - 3000K 1A2970403.30.20 Brushed Brass - 2700K 1A2970803.27.20 Brushed Brass - 3000K 1A2970803.30.20 Total Black - 2700K 1A2972603.27.20 Total Black - 3000K 1A2972603.30.00

Compulsory accessories

Electrical power supply



Driver LED				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	MISS 2	1Z0241180.350	




Driver LED				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	MISS 2	170240870 350	





Davide Groppi / 2005



1A2820003.00.00


1A2830003.00.00

1A2840003.00.00

Material Japanese Paper - PE .00 Standard Finish

Note Shade with japanese paper texture luminaire - 304 Stainless steel suspension cables - White cable -

MOON 60 DE: dual emission with separated switch - Black cable.



23.62"

MOON 60

Diameter 23.62" Max 25W - E26 120V - 60Hz Bulb not included ON/OFF

Moisture barrier bag included



MOON 60 DE

Diameter 23.62" - Dual emission

Max 25W - E26 120V - 60Hz

Bulb not included

ON/OFF

Moisture barrier bag included



MOON 80

Diameter 30.71" Max 25W - E26 120V - 60Hz Bulb not included ON/OFF Moisture barrier bag included CUL US

Standard - ON/OFF

Standard - ON/OFF

Standard - ON/OFF

Davide Groppi / 2005

47.24"

78.74"

CULUS

MOON 120

Diameter 47.24"

Bulb not included

Moisture barrier bag and

Max 2x25W - E26 120V - 60Hz

ON/OFF

wooden crate included



MOON 200

Diameter 78.74" Max 4x25W - E26

120V - 60Hz

Bulb not included

ON/OFF

Moisture barrier bag and wooden crate included



Standard - ON/OFF

1A2850003.00.00

Standard - ON/OFF

1A2860003.00.00

MOON Davide Groppi / 2005

Optional accessories

Installation kit







 Sloped ceiling fixing kit
 Not included


 Nickel plated - 1 Piece
 MOON 120
 1A0510000.00.00

Other accessories

Moisture barrier bag				Included
	Packaging for air and sea shipping	MOON 120	49860020	
Moisture barrier bag				Included
	Packaging for air and sea shipping	MOON 200	48780030	
Wooden crate				Included
	Packaging for air and sea shipping	MOON 120	49860010	
Wooden crate				Included
	Packaging for air and sea shipping	MOON 200	48780020	








NEURO Davide Groppi - Beppe Merlano / 2013

Suspension / Direct / Indoor

Material Metal

Finish .03 Matt White .04 Matt Black

Note White finish luminaire with white cable and black finish luminaire with black cable (393.70") - 5 Clamps included.



NEURO

Max 10W - GU10 120V - 60Hz Bulb not included ON/OFF CON_US LISTED

Matt White - ON/OFF Matt Black - ON/OFF 1A0160303.00.00 1A0160403.00.00

Optional accessories

Installation kit



Wall/ceiling rose	Not included
Matt White	1A3440303.00.00
Matt Black	1A3440403.00.00



Clamp		Included
Matt White	1 Piece	1A3270300.00.00
Matt Black	1 Piece	1A3270400.00.00



The light in the plate is the most beautiful light. Light as an ingredient, used courteously but at the same time decisively.

Suspension / Direct / Indoor

Material Metal

Finish .03 Matt White

Note White ceiling rose luminaire - White cable.



OVO Max 20W - 12V - GU4

120V - 60Hz Bulb not included ON/OFF

Matt White - ON/OFF 1A2890303.00.00



Massimiliano Alajmo - Raffaele Alajmo / 2010

The light in the plate is the most beautiful light. Light as an ingredient, used courteously but at the same time decisively.

Suspension / Direct / Indoor

Material Metal

Finish .03 Matt White

Note White ceiling rose luminaire - White cable.



OVONELPIATTO

Max 20W - 12V - GU4

120V - 60Hz Bulb not included


ON/OFF

Matt White - ON/OFF 1A2880303.00.00





Michele Groppi / 2023



REFLEX S

Michele Groppi / 2023

Michele Groppi / 2023


REFLEX S

Suspension / Indirect / Indoor

Material Metal - Mirror

Finish .04 Matt Black

REFLEX S 1: white ceiling rose luminaire.



REFLEX S 1

Ceiling rose model 36W

120V - 60Hz

2700K - 4196lm / 3000K - 4464lm

CRI >90

Driver included Driver integrated


DALI - PUSH - 1-10V

Matt Black - 2700K - DALI - PUSH - 1-10V Matt Black - 3000K - DALI - PUSH - 1-10V

1A4790403.27.07 1A4790403.30.07

1A4790403.27.20

1A4790403.30.20



REFLEX S 2

Remote power supply model

33W

Max 350mA DC - 60Hz

2700K - 4196lm / 3000K - 4464lm

CRI >90

Driver not included

Matt Black - 2700K Matt Black - 3000K

Electrical power supply



Compulsory accessories

Driver LED			Not included	
220-240V(100-127V)	700mA/50W(40W)/IP20/DALI	REFLEX S 2	1Z0241140.700	

Optional accessories

Installation kit



		Suspension fixing kit - See page 484	
Recessed fixing kit for 0.49" plasterboard		Not included	
Matt White	For suspension cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000300.01.00	
Matt Black	For suspension cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000400.01.00	
Matt White	For elettrical cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000300.04.00	
Matt Black	For elettrical cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000400.04.00	



Ceiling fixing kit		Not include	
Matt White	For suspension cables - 1 Piece	1X0010300.01.00	
Matt Black	For suspension cables - 1 Piece	1X0010400.01.00	
Matt White	For elettrical cables - 1 Piece	1X0010300.04.00	
Matt Black	For elettrical cables - 1 Piece	1X0010400.04.00	



Wall back plate		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00



Davide Groppi / 2013

The smallest possible shape.
A suspended luminous segment. Beautiful by itself or in composition.
Suitable for working area or kitchen.

SHANGHAI

Davide Groppi / 2013


SHANGHAI Davide Groppi / 2013

Suspension / Direct / Indoor

Material Metal - Methacrylate

.03 Matt White Finish .08 Brushed Brass

Note White ceiling rose luminaire - 304 Stainless steel suspension cables - Transparent coaxial cable.




SHANGHAI 1

Power kit with plug model 15,5W 120V - 60Hz

2700K - 592lm / 3000K - 619lm CRI >90

Driver included Driver integrated 1-10V

Matt White - 2700K - 1-10V	1A3260303.27.03
Natt White - 3000K - 1-10V	1A3260303.30.03
rushed Brass - 2700K - 1-10V	1A3260803.27.03
rushed Brass - 3000K - 1-10V	1A3260803.30.03



SHANGHAI 2

Remote power supply model 13W 24V DC 2700K - 592lm / 3000K - 619lm CRI >90

Driver not included

Matt White - 2700K 1A3260303.27.20 Matt White - 3000K 1A3260303.30.20 1A3260803.27.20 Brushed Brass - 2700K Brushed Brass - 3000K 1A3260803.30.20

Compulsory accessories

Electrical power supply



Driver LED				Not included
220-240V(100-127V)	24V/22W(12W)/IP20/ON/OFF	SHANGHAI 2	1Z0240410	



Dimmable controller				Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	SHANGHAI 2	1Z0000034	

Optional accessories

Installation kit




Recessed fixing kit for 0.49" plasterboard		Not included
Matt White	For suspension cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000300.01.00
Matt Black	For suspension cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000400.01.00

Suspension fixing kit - See page 484





Ceiling fixing kit		d
For suspension cables - 1 Piece	1X0010300.01.00	
For suspension cables - 1 Piece	1X0010400.01.00	
	<u>'</u>	· · · · · · · · · · · · · · · · · · ·



Suspension kit



Sloped ceiling fixing hook	Not included
1 Piece	1A0530000.00.00
	-



Davide Groppi / 2015

A de-structured chandelier that can be re-assembled as you like.

A conjuring trick that gives you the possibility of connecting the diodes in series using very weak electric currents with wires that are practically invisible.

The very thin wire that connects the light sources and brings them alive, one in relation to the other, is the principal component of this project.

SIMBIOSI


Suspension / Direct / Indoor

Material Metal

.03 Matt White Finish .26 Total Black

Note

White finish luminaire with white ceiling rose and red wires - Black finish luminaire with black ceiling rose and anthracite gray wires -304 Stainless steel suspension cables.



SIMBIOSI

15W

CUL US

120V - 60Hz	Matt
2700K - 931lm / 3000K - 960lm	
CRI >90	Matt
Driver included	Tota
Driver integrated	Tota
DALI	
-, ·-·	1

t White - 3000K - DALI al Black - 2700K - DALI al Black - 3000K - DALI


Matt White - 2700K - 1-10V

Matt White - 3000K - 1-10V

Total Black - 2700K - 1-10V

Total Black - 3000K - 1-10V

t White - 2700K - DALI 1A2870303.27.01 1A2870303.30.01 1A2872603.27.01 1A2872603.30.01



SIMBIOSI

15W 120V - 60Hz

2700K - 931lm / 3000K - 960lm

CRI >90

Driver included Driver integrated

CUL US

1-10V

Davide Groppi / 2015

Optional accessories

Installation kit

Davide Groppi / 2015

1A2870303.27.03

1A2870303.30.03

1A2872603.27.03

1A2872603.30.03



Recessed fixing I	rit for 0.49" plasterboard	Not inclu
Matt White	For suspension cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000300.01.00
Matt Black	For suspension cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000400.01.00

SIMBIOSI

Suspension fixing kit - See page 484





Ceiling fixing kit		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.01.00
Matt Black	For suspension cables - 1 Piece	1X0010400.01.00



Wall back plate			Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00	

Suspension kit



Sloped ceiling fixing hook	Not included
1 Piece	1A0530000.00.00





Davide Groppi / 2023

A blade of light just 7 millimetres thick, the expression of that purest and most essential part of our thought.

The surprise of an extremely thin, yet at the same time very bright, lamp.


SOTTILE Davide Groppi / 2023

Suspension / Direct / Indoor

Material Metal

Finish .29 Brushed Bronze .36 Brushed Black


Note SOTTILE 1 DE and SOTTILE 2 DE: dual emission luminaires with mono switch.



SOTTILE 1

Ceiling rose model 22W 120V - 60Hz 2700K - 1692lm / 3000K - 1855lm CRI >90 Driver included Driver integrated DALI - PUSH - 1-10V

1A4232903.27.07 Brushed Bronze - 2700K - DALI - PUSH - 1-10V Brushed Bronze - 3000K - DALI - PUSH - 1-10V 1A4232903.30.07 Brushed Black - 2700K - DALI - PUSH - 1-10V 1A4233603.27.07 Brushed Black - 3000K - DALI - PUSH - 1-10V 1A4233603.30.07



SOTTILE 1 DE

44W 120V - 60Hz 2700K - Up 1692lm - Down 1692lm / 3000K - Up 1855lm - Down 1855lm CRI >90 / 90 Driver included

Ceiling rose model - Dual emission

Brushed Bronze - 2700K - DALI - PUSH - 1-10V Brushed Bronze - 3000K - DALI - PUSH - 1-10V Brushed Black - 2700K - DALI - PUSH - 1-10V Brushed Black - 3000K - DALI - PUSH - 1-10V


1A4642903.27.07 1A4642903.30.07 1A4643603.27.07 1A4643603.30.07

1A4232903.27.20

1A4232903.30.20

1A4233603.27.20

1A4233603.30.20



SOTTILE 2

Driver integrated DALI - PUSH - 1-10V

Remote power supply model 19W 24V DC 2700K - 1692lm / 3000K - 1855lm CRI >90 Driver not included

Brushed Bronze - 2700K Brushed Bronze - 3000K Brushed Black - 2700K Brushed Black - 3000K

Davide Groppi / 2023

SOTTILE 2 DE

Remote power supply model -**Dual emission** 24V DC 3000K - Up 1855lm - Down 1855lm CRI >90 / 90 Driver not included

Brushed Bronze - 2700K Brushed Bronze - 3000K Brushed Black - 2700K 2700K - Up 1692lm - Down 1692lm / Brushed Black - 3000K

1A4642903.27.20 1A4642903.30.20 1A4643603.27.20 1A4643603.30.20

SOTTILE

Compulsory accessories

Electrical power supply



Driver LED			Not included
100-240V	24V/50W/IP20/ON/OFF	SOTTILE 2 / SOTTILE 2 DE 1Z1120490	



Driver LED			Not included
120-277V	24V/60W/IP20/TRIAC - 1-10V	SOTTILE 2 / SOTTILE 2 DE 1Z2020040	



Matt Black DALI - PUSH - 1-10V - IP20 SOTTILE 2 / SOTTILE 2 DE 1Z2170020	

SOTTILE

Davide Groppi / 2023

Suspension fixing kit - See page 484


Optional accessories

Installation kit




		-	
Recessed fixing k	cit for 0.49" plasterboard		Not included
Matt White	For suspension cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000300.01.00	
Matt Black	For suspension cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000400.01.00	
Matt White	For elettrical cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000300.04.00	
Matt Black	For elettrical cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000400.04.00	







Wall back plate		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

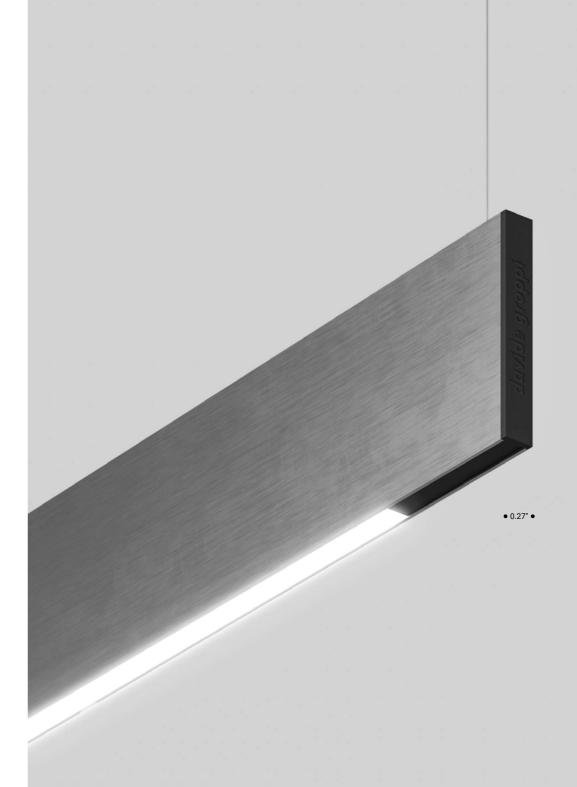



Davide Groppi / 2023

The purity of the suspended cone encases a small light machine that produces direct, indirect and diffused light at the same time.

Sottosopra: pure, elegant, wonderfully efficient.

SOTTOSOPRA

Davide Groppi / 2023


Davide Groppi / 2023

Suspension / Indirect-Direct / Indoor

Material Metal

Finish .03 Matt White

Note Dimmable suspension lamp with dual emission.




SOTTOSOPRA 1

Ceiling rose model 30W 100-240V - 50/60Hz 2700K - Down 228Im - Up 1827Im /

2700K - Down 228lm - Up 1827lm , 3000K - Down 245lm - Up 1876lm CRI Down >90 / Up >80

CRI Down >90 / Up >80 Driver included TRIAC/IGBT Matt White - 2700K - TRIAC/IGBT
Matt White - 3000K - TRIAC/IGBT


TRIAC/IGBT 1A4540303.27.02 TRIAC/IGBT 1A4540303.30.02



SOTTOSOPRA 1

Ceiling rose model 30W 100-240V - 50/60Hz 2700K - Down 228Im - Up 1827Im / 3000K - Down 245Im - Up 1876Im CRI Down >90 / Up >80

Matt White - 2700K - 1-10V Matt White - 3000K - 1-10V 1A4540303.27.03 1A4540303.30.03



SOTTOSOPRA 2

Driver included 1-10V

Remote power supply model 30W Max 500mA DC 2700K - Down 228Im - Up 1827Im /

3000K - Down 245lm - Up 1876lm CRI Down >90 / Up >80 Driver not included Matt White - 2700K Matt White - 3000K 1A4540303.27.20 1A4540303.30.20

Compulsory accessories

Electrical power supply



Driver LED				Not included
120-277V	500mA/30W/IP20/TRIAC - 1-10V	SOTTOSOPRA 2	1Z2020050.500	


Optional accessories

Installation kit



			Suspension fixing kit - See page 484	
Recessed fixing I	kit for 0.49" plasterboard	N	lot included	
Matt White	For elettrical cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	SOTTOSOPRA 2	1X0000300.05.00	
Matt Black	For elettrical cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	SOTTOSOPRA 2	1X0000400.05.00	

WALL



1A2340303.27.03

1A2340303.30.03

1A2340403.27.03

1A2340403.30.03

1A2490303.00.00

1A2490403.00.00

Wall / Direct / Indoor

Material Metal

Finish .03 Matt White .04 Matt Black

Note Adjustable luminaire - DOT P 51: white wall back plate.



DOT P

13W 120V - 60Hz

2700K / 3000K CRI 97

Driver included Driver integrated

1-10V



DOT P 51

CUL US

Max 10W - GU10 120V - 60Hz

Bulb not included ON/OFF

60Hz Matt White - 0

Matt Black - ON/OFF

Matt White - ON/OFF

Matt White - 2700K - 1-10V

Matt White - 3000K - 1-10V

Matt Black - 2700K - 1-10V

Matt Black - 3000K - 1-10V

ar carragila Davide Groppi / 2010

Compulsory accessories

Other accessories



Lens			Not included
Beam - 14°	2700K - CRI 97 - 983lm	DOT P	1A3090000.00.00
	3000K - CRI 97 - 1038lm		
Beam - 24°	2700K - CRI 97 - 943lm	DOT P	1A3100000.00.00
	3000K - CRI 97 - 996lm		
Beam - 36°	2700K - CRI 97 - 955lm	DOT P	1A3110000.00.00
	3000K - CRI 97 - 1005lm		
Beam - 50°	2700K - CRI 97 - 965lm	DOT P	1A3120000.00.00
	3000K - CRI 97 - 1016lm		

Optional accessories

Other accessories



Accessory holder + Honeycomb louvre			Not included
	DOT P	1X0080400.01.00	



Elliptical filter		N	lot include
Standard	DOT P	1X0080000.02.00	



Blue filter		1	Not included
Standard	DOT P	1X0080000.03.00	



Red filter			Not included
Standard	DOT P	1X0080000.04.00	



Yellow filter			Not included
Standard	DOT P	1X0080000.05.00	



Harry Thaler / 2014

A gestural project, full of irony and nostalgia.

Therefore, among a thousand stories, prohibitions, absurd technical rules, we have reached the end. The end of the incandescent bulb.

Edison's Nightmare is a salute to Edison's light bulb*, a dream that changed the way we live forever, stealing time to read and write from sleep.

It is a classic light bulb, nailed to the wall. Like a work of art.

* From 01 September 2012, incandescent bulbs cannot be sold in the EU.

EDISON'S NIGHTMARE

Harry Thaler / 2014

Wall / Diffuse / Indoor

MaterialBlown glass - MetalFinish.00Standard

Note Coaxial cable luminaire - Halogen bulb included.



EDISON'S NIGHTMARE

Max 10W - G4 12V 120V - 60Hz Bulb included Driver included Dimmer on board

Standard - Dimmer on board 1A3380003.00.06





Alessandra Dallagiovanna - Davide Groppi / 2010

A luminous short film.

Telling a story in light, a series of old 35MM slides are lit from behind,
pulsating and shown at random.

The photographs can be assembled and replaced as you like.
The choice of the message to be communicated is completely personal:
it can be an image, a logo, a sentence, anything you want to represent, at any time.
The light message is punctuated by a blinking LED, offering reading in movement.

1A3410003.00.00


Objects-Wall / Diffuse / Indoor

Material Metal - Polycarbonate

Finish .00 Standard

Note Slowly flashing lights luminaire - White luminous module - Black fixing structure - Customizable images not included - Modules connector included.

Standard - ON/OFF



FILM

3W

5V DC

Driver not included Driver on the wall

ON/OFF


Compulsory accessories

Electrical power supply



Driver LED		No	ot included
Matt Black	Input 110-240V - 50/60Hz - Output 5V DC - 15W - IP40	1Z1470180	





FOLDER 967 DESIGN / 2013

Wall / Indirect / Indoor

Material Metal

Finish .03 Matt White



FOLDER

20W

120V - 60Hz

2700K - 397lm / 3000K - 415lm

CRI >80 Driver included Driver integrated 1-10V

Matt White - 2700K - 1-10V Matt White - 3000K - 1-10V 1A3350303.27.03 1A3350303.30.03






Lamp with a simple and essential shape. For interiors and adjustable. MIRA Omar Carraglia / 2012

Wall / Direct / Indoor

Material Metal

.03 Matt White Finish .04 Matt Black

Note Adjustable luminaire.



MIRA SWITCH

7,5W 120V - 60Hz

2700K - 327lm / 3000K - 352lm

CRI >90

Driver included


Driver integrated

ON/OFF CUL US

Matt White - 2700K - ON/OFF Matt White - 3000K - ON/OFF Matt Black - 2700K - ON/OFF Matt Black - 3000K - ON/OFF

1A2280303.27.00 1A2280303.30.00 1A2280403.27.00

1A2280403.30.00



MIRA

7,5W

120V - 60Hz


2700K - 327lm / 3000K - 352lm CRI >90

Driver included Driver integrated

DALI

CUL US

Matt White - 2700K - DALI	1A2280303.27.01
Matt White - 3000K - DALI	1A2280303.30.01
Matt Black - 2700K - DALI	1A2280403.27.01
Matt Black - 3000K - DALI	1A2280403.30.01



MIRA

7,5W

120V - 60Hz

2700K - 327lm / 3000K - 352lm


CRI >90

Driver included Driver integrated 1-10V

CUL US

Matt White - 2700K - 1-10V Matt White - 3000K - 1-10V Matt Black - 2700K - 1-10V Matt Black - 3000K - 1-10V

1A2280303.27.03 1A2280303.30.03 1A2280403.27.03 1A2280403.30.03

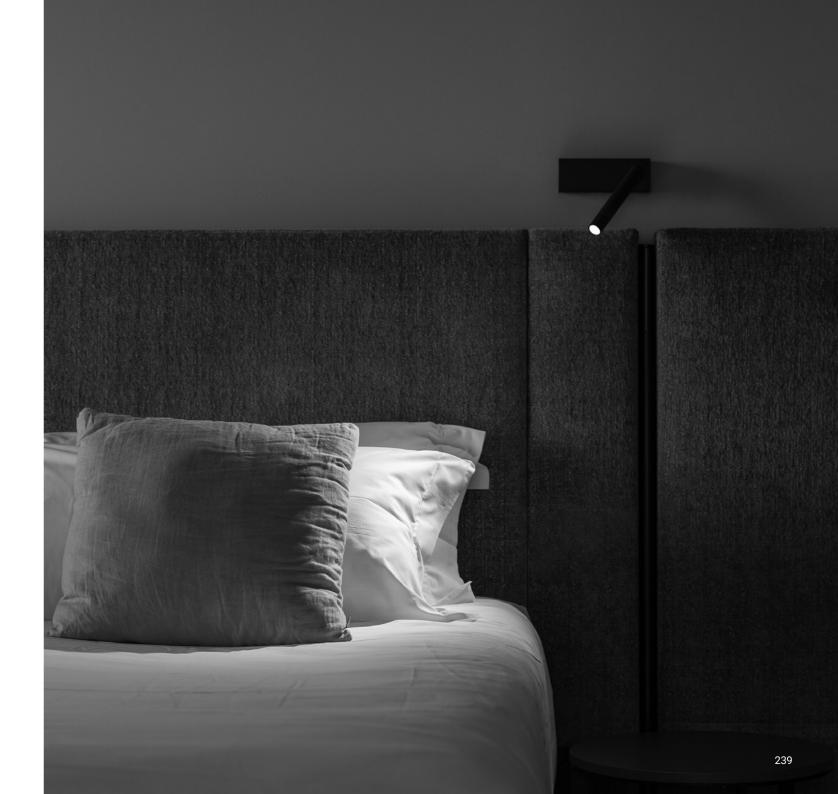

MIRA MAGNETIC Omar Carraglia / 2015



Lamp with a simple and essential shape. For interiors and adjustable, it is designed with a magnetic application system to be even more versatile and functional.


MIRA MAGNETIC Omar Carraglia / 2015

Wall / Direct / Indoor

Material Metal

Finish .03 Matt White .04 Matt Black

Note Adjustable luminaire with magnetic fixing base - White finish luminaire with white cable and black finish luminaire with black cable (118.11").



MIRA MAGNETIC Matt White - 2700K 1A3680303.27.20 5,6W Matt White - 2700K 1A3680303.27.20 Max 500mA DC Matt White - 3000K 1A3680303.30.20 2700K - 327lm / 3000K - 352lm Matt Black - 2700K 1A3680403.27.20 CRI >90 Matt Black - 3000K 1A3680403.30.20 Driver not included 1A3680403.30.20

Compulsory accessories

Electrical power supply



Driver LED		Not include	a
220-240V(100-127V) 500mA	/20W(15W)/IP20/PUSH - 1-10V	1Z0240870.500	_




Driver LED		Not included
Matt White	Input 100-240V - 50/60Hz - Output 350mA - 15W - IP20 - Dimmer on board	1A3180303.00.06
Matt Black	Input 100-240V - 50/60Hz - Output 350mA - 15W - IP20 - Dimmer on board	1A3180403.00.06





Davide Groppi / 2019




MORSETTO P Davide Groppi / 2019

Wall / Direct / Indoor

Material Metal

Finish .04 Matt Black

Note Adjustable luminaire with Extradark comfort system - Black cable.



MORSETTO P

13W

24V DC


2700K - 700lm / 3000K - 753lm

CRI >90 UGR <19 Driver included Dimmer on board Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board 1A2570403.27.06 1A2570403.30.06



Optional accessories

Electrical power supply



Driver LED		Inclu	ıded
Matt Black	Input 110-240V - 50/60Hz - Output 24V DC - 18W - IP20	1Z0431020	





Davide Groppi / 1999

A tool to light. The luminaire is pure form, a simple container for the light source.

OZEN Davide Groppi / 1999

Wall / Diffuse / Indoor

Material Metal

.01 Polished Chrome Finish .14 Brushed Chrome .03 Matt White

White wall back plate luminaire. Note



OZEN

Max 60W - G9 120V - 60Hz Bulb not included ON/OFF CULUS

Polished Chrome - ON/OFF Matt White - ON/OFF

1A3960103.00.00 1A3960303.00.00 Brushed Chrome - ON/OFF 1A3961403.00.00



Davide Groppi / 1999

A tool to light. The luminaire is pure form, a simple container for the light source.

Wall / Diffuse / Indoor

MaterialGlass - MetalFinish.00Standard

Note White wall back plate luminaire.



OZEN VETRO

CULUS

Max 48W - G9 120V - 60Hz Bulb not included ON/OFF

Standard - ON/OFF

1A3970003.00.00



Davide Groppi / 2007



A tool to light.

Pure form, a simple container for the light source.

Light is incorporated into the space, becoming an architectural element.

Wall / Diffuse / Indoor

Material Metal

.03 Matt White Finish




PIÙ


Max 120W - R7s 120V - 60Hz Bulb not included

ON/OFF

Matt White - ON/OFF

1A3370303.00.00

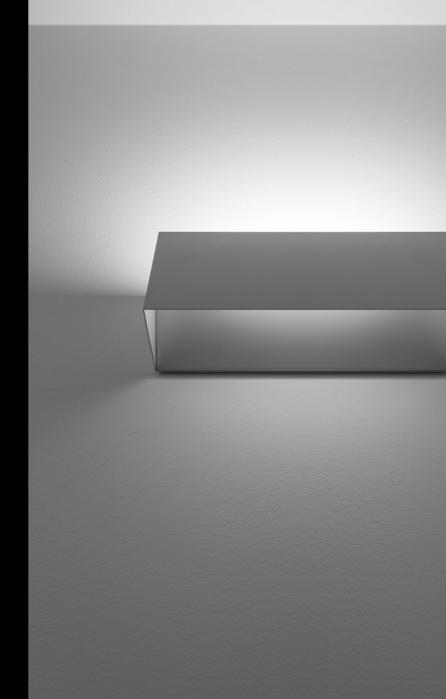

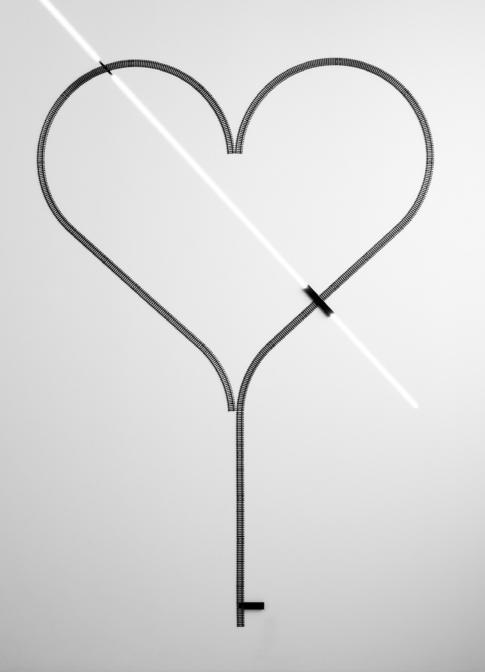

A ready-made project to design the space with a sense of irony and weightlessness.

The tracks of an electric train can be used to draw a heart,
but also to conduct electricity.


Rail is the boundary between usefulness and show, between art and design.

RAIL Davide Groppi / 2019

Wall / Direct / Indoor


ABS - Metal Material .00 Standard Finish

Black rails luminaire - Black cable. Note



RAIL 22W 24V DC 3000K - 2000lm CRI >90

Driver included Dimmer on board Standard - 3000K - Dimmer on board 1A3400003.30.06

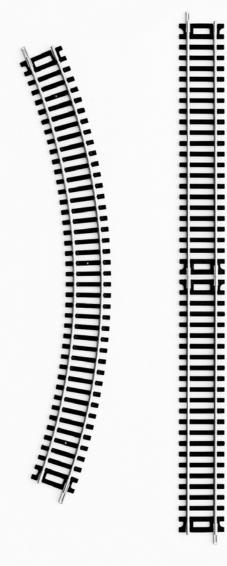



/ 2001



A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.

Luminaire designed to be powered by Endless system.

Wall-Ceiling / Direct / Indoor

Material Metal

Finish .03 Matt White .04 Matt Black

Note Adjustable luminaire.



SPOT

Max 17W 120V - 60Hz Driver included Driver integrated

Matt White - 1-10V Matt Black - 1-10V 1A1080303.00.03 1A1080403.00.03

1-10V LED Module not included

Compulsory accessories

LED modules



DG111 LED Module			Not included
	13,5W - 15° - 400mA DC -	1A4700003.27.20	
	2700K - 1318lm - CRI 90 -		
	Energy Efficiency F - Dimmable		
	13,5W - 15° - 400mA DC -	1A4700003.30.20	-
	3000K - 1345lm - CRI 90 -		
	Energy Efficiency F - Dimmable		



DG111 LED Module			Not included
	13,5W - 22° - 400mA DC - 2700K - 1487lm - CRI 90 - Energy Efficiency F - Dimmable	1A3890003.27.20	
	13,5W - 22° - 400mA DC - 3000K - 1556lm - CRI 90 - Energy Efficiency F - Dimmable	1A3890003.30.20	




OG111 LED Module			Not included
	13,5W - 36° - 400mA DC - 2700K - 1446lm - CRI 90 - Energy Efficiency F - Dimmable	1A3900003.27.20	
	13,5W - 36° - 400mA DC - 3000K - 1512lm - CRI 90 - Energy Efficiency F - Dimmable	1A3900003.30.20	_

Optional accessories

Other accessories

/ 2001



Horizontal directional fins	Not included
Matt Black	1X0070400.01.00



Cylindrical screen	Not included
Matt Black	1X0070400.02.00



Cone 45°	Not included
Matt Black	1X0070400.03.00



Accessory holder + Soft filter + Honeycomb louvre		Not included
Matt Black	1X0070400.04.00	



Accessory holder + Elliptical filter		ot included
Matt Black	1X0070400.05.00	




Blue filter		Not included
Standard	1X0070000.06.00	



Red filter	Not included
Standard 1X007000	0.07.00



Yellow filter		Not included
Standard	1X0070000.08.00	·

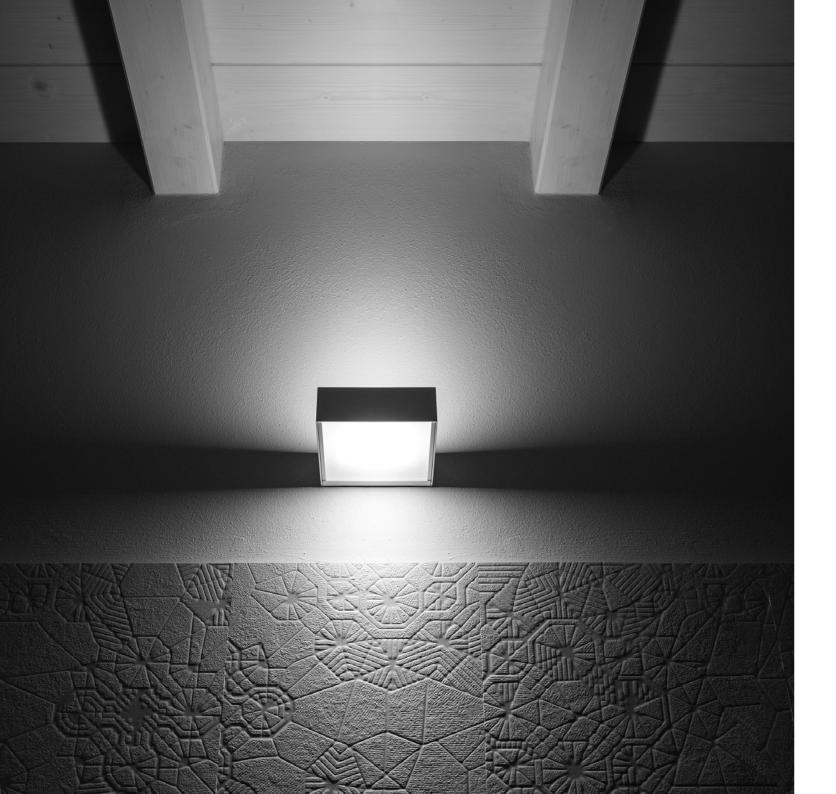

The luminaire is pure form, a simple container for the light source. Light is incorporated into the space, becoming an architectural element.

TOAST

Davide Groppi - Alberto Zattin / 2001

Wall / Diffuse / Indoor

Material

Glass - Metal

Finish .01 Polished Chrome

.03 Matt White .04 Matt Black

.08 Brushed Brass

.14 Brushed Chrome

White wall back plate luminaire.



TOAST

12W

120V - 60Hz

2700K - 743lm / 3000K - 743lm

CRI >90

Driver included

Driver integrated

ON/OFF

1A3280103.27.00 Polished Chrome - 2700K - ON/OFF Polished Chrome - 3000K - ON/OFF 1A3280103.30.00 1A3280303.27.00 Matt White - 2700K - ON/OFF Matt White - 3000K - ON/OFF 1A3280303.30.00 Matt Black - 2700K - ON/OFF 1A3280403.27.00 1A3280403.30.00 Matt Black - 3000K - ON/OFF Brushed Brass - 2700K - ON/OFF 1A3280803.27.00 1A3280803.30.00 Brushed Brass - 3000K - ON/OFF 1A3281403.27.00 Brushed Chrome - 2700K - ON/OFF Brushed Chrome - 3000K - ON/OFF 1A3281403.30.00





CEILING



Davide Groppi / 2023


Abstraction, purity, graphic sign.
The projected reduction of Infinito.
The disc appears enigmatic, the symbolic presence of the absence of light.

ASINTOTO Davide Groppi / 2023

Ceiling / Indirect / Indoor

Material Metal - Methacrylate
Finish .27 Gravity Black

Note Luminaire with black cable (39.37").



ASINTOTO

CRI >80 Driver not included

18W Max 500mA DC 2700K - 1435lm / 3000K - 1478lm

Gravity BI

Gravity Black - 2700K 1A4072703.27.20 Gravity Black - 3000K 1A4072703.30.20 Davide Groppi / 2023

ASINTOTO

Compulsory accessories

Electrical power supply



Driver LED		
220-240V(100-127V)	500mA/26,5W(26,5W)/IP20/DALI - PUSH - 1-10V	1Z0240530.500

Optional accessories

Installation kit



Circular plasterboard panel 0.49"		
Standard	Cut-out 15.75" x 15.75" - Minimum space for mounting Ø 4.53"	1A4520000.00.00

Installation kit



		Suspension fixing kit - See page 482
Recessed fixing k	cit for 0.49" plasterboard	Not included
Matt White	For elettrical cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000300.04.00
Matt Black	For elettrical cables - 1 Piece - Plasterboard cut-out Ø 1.73" - Minimum space for mounting 2.76"	1X0000400.04.00










Wall back plate		Not included	
Matt White	For mounting on brick masonry walls	1X0050300.01.00	

Other accessories



gnetic weight	
For sloped installation	1A4710000.00.00
For sloped installation	TA4/10000.00.00

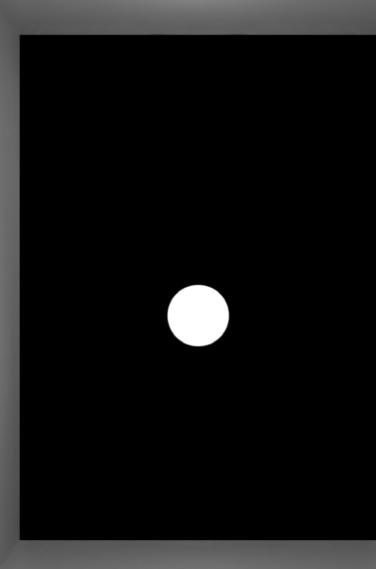



Omar Carraglia - Davide Groppi / 2015



A tool to light.

A luminaire designed for use with state-of-the-art LED bulbs to offer superior performance and a wide range of light beams.

DOT PL 51

Omar Carraglia - Davide Groppi / 2015

Ceiling / Direct / Indoor Metal

Material

.03 Matt White Finish



DOT PL 51

Max 10W - GU10 120V - 60Hz

Bulb not included

ON/OFF

Matt White - ON/OFF

1A3800303.00.00





/ 2016



The luminaire is pure form, a simple container for the light source. Light is incorporated into the space, becoming an architectural element. MINI PL 51 / 2016

Ceiling / Direct / Indoor

Material Metal

Finish .03 Matt White .34 Matt White/Black Bicolor

Note Adjustable luminaire.



MINI PL 51


CULUS

Max 10W - GU10 120V - 60Hz Bulb not included ON/OFF

Matt White - ON/OFF
Matt White/Black Bicolor - ON/OFF

1A3450303.00.00 1A3453403.00.00





NULLA PL Davide Groppi / 2014

Ceiling / Direct / Indoor Metal

Material

Finish .03 Matt White



NULLA PL

8,5W

120V - 60Hz

2700K - 460lm / 3000K - 495lm

CRI >90 Driver included Driver integrated

ON/OFF

Matt White - 2700K - ON/OFF Matt White - 3000K - ON/OFF 1A2500303.27.00 1A2500303.30.00



PUNTO PL

/ 200



A tool to light.

The luminaire is pure form, a simple container for the light source.

Light is incorporated into the space, becoming an architectural element.

PUNTO PL

/ 2004

PUNTO PL

Ceiling / Direct / Indoor

Material Metal

Finish .03 Matt White .34 Matt White/Black Bicolor

Note Adjustable luminaire.



PUNTO PL

Max 17W 120V - 60Hz Driver included Driver integrated

Matt White - 1-10V Matt White/Black Bicolor - 1-10V

1A1110303.00.03 1A1113403.00.03

1-10V

LED Module not included

Compulsory accessories

LED modules



DG111 LED Module			Not included
	13,5W - 15° - 400mA DC - 2700K - 1318lm - CRI 90 -	1A4700003.27.20	
	Energy Efficiency F - Dimmable		
	13,5W - 15° - 400mA DC -	1A4700003.30.20	_
	3000K - 1345lm - CRI 90 -		
	Fnergy Efficiency F - Dimmable		



DG111 LED Module			Not included
	13,5W - 22° - 400mA DC - 2700K - 1487lm - CRI 90 - Energy Efficiency F - Dimmable	1A3890003.27.20	
	13,5W - 22° - 400mA DC - 3000K - 1556lm - CRI 90 - Energy Efficiency F - Dimmable	1A3890003.30.20	



DG111 LED Module			Not included
	13,5W - 36° - 400mA DC - 2700K - 1446lm - CRI 90 - Energy Efficiency F - Dimmable	1A3900003.27.20	
	13,5W - 36° - 400mA DC - 3000K - 1512lm - CRI 90 - Energy Efficiency F - Dimmable	1A3900003.30.20	

Optional accessories

Other accessories

/ 2004



Accessory holder + Soft filter + Honeycomb louvre	Not included
Matt Black	1X0070400.04.00



Accessory holder + Elliptical filter	
Matt Black 1X00704	00.05.00



Blue filter	Not included
Standard	1X0070000.06.00



Red filter		Not included
Standard	1X0070000.07.00	



Yellow filter	Not included
Standard	1X0070000.08.00



/ 2004



A tool to light.

The luminaire is pure form, a simple container for the light source.

Light is incorporated into the space, becoming an architectural element.

PUNTO 2 PL

/ 2004

PUNTO 2 PL

Ceiling / Direct / Indoor

Material Metal

Finish .03 Matt White .34 Matt White/Black Bicolor

Note Adjustable luminaire.



PUNTO 2 PL

Max 2x17W 120V - 60Hz Driver included

Matt White - 1-10V

1A1120303.00.03 1A1123403.00.03

Driver integrated 1-10V

LED Modules not included

Compulsory accessories

LED modules



DG111 LED Module			Not included
	13,5W - 15° - 400mA DC -	1A4700003.27.20	
	2700K - 1318lm - CRI 90 -		
	Energy Efficiency F - Dimmable		
	13,5W - 15° - 400mA DC -	1A4700003.30.20	_
	3000K - 1345lm - CRI 90 -		
	Energy Efficiency F - Dimmable		

Matt White/Black Bicolor - 1-10V



DG111 LED Module			Not included
	13,5W - 22° - 400mA DC - 2700K - 1487Im - CRI 90 - Energy Efficiency F - Dimmable	1A3890003.27.20	
	13,5W - 22° - 400mA DC - 3000K - 1556lm - CRI 90 - Energy Efficiency F - Dimmable	1A3890003.30.20	



DG111 LED Module			Not included
	13,5W - 36° - 400mA DC - 2700K - 1446Im - CRI 90 - Energy Efficiency F - Dimmable	1A3900003.27.20	
	13,5W - 36° - 400mA DC - 3000K - 1512lm - CRI 90 -	1A3900003.30.20	-
	Energy Efficiency F - Dimmable		

Optional accessories

Other accessories

/ 2004



Accessory holder + Soft filter + Honeycomb louvre	Not included
Matt Black	1X0070400.04.00



Accessory holder + Elliptical filter		Not included
Matt Black	1X0070400.05.00	



Blue filter	Not included
Standard	1X0070000.06.00




Red filter		Not included
Standard	1X0070000.07.00	



Yellow filter	Not included
Standard	1X0070000.08.00



Omar Carraglia - Davide Groppi / 2014



SANMARTINO

Omar Carraglia - Davide Groppi / 2014

Ceiling / Direct / Indoor

Material Metal

Finish .03 Matt White .15 Natural Brass



SANMARTINO

8,5W

120V - 60Hz

3000K - 375lm

CRI >90

Driver included Driver integrated

ON/OFF

Matt White - 3000K - ON/OFF Natural Brass - 3000K - ON/OFF 1A3420303.30.00 1A3421503.30.00





/ 2016

A simple, graphic solution. Bringing accent lighting with an external wiring system.

TRICK TRACK /2016

Wall-Ceiling / Direct / Indoor

Material Metal

Finish .03 Matt White .04 Matt Black

Note Adjustable luminaire - White finish luminaire with white cable and black finish luminaire with black cable (78.74") - Maximum 20 connectable luminaires.



TRICK TRACK

Max 10W - GU10 120V - 60Hz Bulb not included ON/OFF

Matt White - ON/OFF Matt Black - ON/OFF 1A3430303.00.00 1A3430403.00.00

Optional accessories

Installation kit




Wall/ceiling rose	Not included
Matt White	1A3440303.00.00
Matt Black	1A3440403.00.00



RECESSED



/ 2021



BUCO 58 / 2021

Outdoor-Recessed / Direct / Indoor

Glass - Metal Material

Finish .03 Matt White .04 Matt Black

For installation: plasterboard cut-out Ø 1.96" - Minimum space for mounting 5.90". Note



BUCO 58 - 40°

7W

24V DC

2700K - 495lm / 3000K - 546lm

Matt White - 2700K Matt White - 3000K Matt Black - 2700K

1A1490303.30.20

Beam 40°

1A1490403.27.20

1A1490303.27.20

CRI >90

Matt Black - 3000K

1A1490403.30.20

Driver not included

Literack Certificated 7AO-VENUS Flexalighting Product

Compulsory accessories

Electrical power supply



Driver LED			Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620	

Optional accessories

Installation kit



Installation box			Not included
	Cut-out Ø 2.08" -	1A1500000.00.00	
	Minimum space for mounting 5.90"		





Omar Carraglia - Davide Groppi / 2015



A tool to light.

A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.

Recessed / Direct / Indoor

Material Metal

Finish .03 Matt White .04 Matt Black

Note Adjustable luminaire - For installation: plasterboard cut-out 1.57" x 1.57" - Minimum space for mounting 3.35".



DOT R		
13W	Matt White - 2700K	1A4770303.27.20
Max 350mA DC	Matt White - 2700K	1A4770303.30.20
2700K / 3000K	Matt Black - 2700K	1A4770403.27.20
CRI 97	Matt Black - 3000K	1A4770403.30.20
Driver not included		

Compulsory accessories

Other accessories



Lens			Not included
Beam - 14°	2700K - CRI 97 - 983lm	DOT R	1A3090000.00.00
	3000K - CRI 97 - 1038lm		
Beam - 24°	2700K - CRI 97 - 943lm	DOT R	1A3100000.00.00
	3000K - CRI 97 - 996lm		
Beam - 36°	2700K - CRI 97 - 955lm	DOT R	1A3110000.00.00
	3000K - CRI 97 - 1005lm		
Beam - 50°	2700K - CRI 97 - 965lm	DOT R	1A3120000.00.00
	3000K - CRI 97 - 1016lm		

Electrical power supply



Driver LED				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	DOT R	1Z0240870.350	

Optional accessories

Other accessories



Accessory holder + Honeycomb louvre	Not included
DOT R 1X0080	00.01.00



Elliptical filter		Not included
Standard	DOT R 1X0080000.02.00	



Blue filter			Not included
Standard	DOT R	1X0080000.03.00	



Red filter			Not included
Standard	DOT R	1X0080000.04.00	



Ye	ellow filter			Not included
St	andard	DOT R	1X0080000.05.00	



Omar Carraglia / 2015

A tool to light.

The luminaire is pure form, a simple container for the light source.

Light is incorporated into the space, becoming an architectural element.

MIRA R Omar Carraglia / 2015

Recessed / Direct / Indoor

Material Metal

Finish .03 Matt White .04 Matt Black

Note Adjustable luminaire - For installation: plasterboard cut-out 1.57" x 1.57" - Minimum space for mounting 3.34".



MIRA R

5,6W Max 500mA D0

2700K - 327lm / 3000

CRI >90

Driver not included

CULUS

	Matt White - 2700K	1A3690303.27.20
	Matt White - 3000K	1A3690303.30.20
n / 3000K - 352lm	Matt Black - 2700K	1A3690403.27.20
	Matt Black - 3000K	1A3690403 30 20

Compulsory accessories

Electrical power supply



Driver LED			Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH - 1-10V	1Z0240870.500	



Driver LED			Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/DALI	1Z0241180.500	



NULLA

Davide Groppi / 2010

An extreme expression of subtraction, uniting optics and electronics as an answer to the ultimate challenge: the absence of structural support and the essence of light.

Nulla is a project that represents both the beginning and end of our work on light. It's the beginning, in the sense that we have always been looking for absolute light, one coming from a distance, almost without a source. It's the end in that every time we look at Nulla, we feel as though we can't get it better than that.

Nulla generates light and propagates mystery. Nulla is the most generous of our lamps. Its sole objective is to hide and give all the attention to whatever it is lighting. What we see is only a tiny black hole, as if it were drawn on the ceiling.

A circle in the ceiling hiding a very bright LED and lens to project the light.

XXIII Compasso d'Oro ADI Award, 2014

NULLA Davide Groppi / 2010

Standard - 2700K

Standard - 3000K

Standard - 2700K

Standard - 3000K

Standard - 2700K

Standard - 3000K

Recessed / Direct / Indoor

Material Metal

.00 Standard Finish

Note Luminaire with Extradark comfort system - NULLA and NULLA 18: visible hole Ø 0.71" - NULLA 25: visible hole Ø 0.98" -

NULLA 18 and NULLA 25: luminaire removable for maintenance.



NULLA - BEAM 23°

9W

24V DC

2700K - 304lm / 3000K - 327lm

Beam 23° CRI >90 UGR <19

Driver not included





NULLA - BEAM 32°

9W 24V DC

2700K - 384lm / 3000K - 413lm

Beam 32° CRI >90

UGR <19

Driver not included





NULLA 18 - BEAM 20°

3W

24V DC

2700K - 162lm / 3000K - 173lm

Beam 20° CRI >90 UGR <19

Driver not included





Davide Groppi / 2010



NULLA 25 - BEAM 23°

5W

24V DC

2700K - 228lm / 3000K - 245lm

Beam 23°

CRI >90

Driver not included



UGR <19

Standard - 2700K Standard - 3000K 1A4080003.27.20 1A4080003.30.20 NULLA





NULLA 25 - BEAM 32°

5W

24V DC

2700K - 288lm / 3000K - 310lm

Beam 32°

CRI >90

UGR <19

Driver not included



Standard - 2700K Standard - 3000K

Standard - 2700K

Standard - 3000K

1A2020003.27.20 1A2020003.30.20





Max 500mA DC

3000K - 357lm / 2700K - 357lm

CRI >90

Driver not included



1A1010003-27 1A1010003

327 326

1A4100003.27.20

1A4100003.30.20

1A2110003.27.20

1A2110003.30.20

1A2010003.27.20

1A2010003.30.20

NULLA

Davide Groppi / 2010

Davide Groppi / 2010 NULLA

Compulsory accessories

Installation kit







00.00
IU.



Plasterboard flange 0.49"			Not included	
Matt Black	Cut-out Ø 1.38" - Minimum space for mounting 7.48	NULLA 25 3"	1A2170400.00.00	



Plasterboard flange 0.49"			Not included	
Matt Black	Cut-out Ø 1.38" - Minimum space for mounting 7.48" - IP65	NULLA 25	1A3980400.00.00	



Plasterboard flange 0.49"			
Cut-out Ø 1.38" - Minimum space for mounting 6.30" - IP65	NULLA 25 T24	18250003	

Electrical power supply



Driver LED				Not included
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH	NULLA / NULLA 18 / NULLA 25	1Z0240870.24	



Driver LED				Not included
220-240V(100-127V)	24V/16W(15W)/IP20/DALI	NULLA / NULLA 18 / NULLA 25	1Z0241180.24	
-				



Driver LED				Not included
120-277V	24V/60W/IP20/TRIAC - 1-10V	NULLA / NULLA 18 / NULLA 25	1Z2020040	

Optional accessories

Installation kit



Trapdoor for plasterboard 0.49"				Not included
Standard	Cut-out 7.87" x 7.87"	NULLA	1A3780000.00.00	



Trapdoor for plasterboard 0.49"				Not included
Standard	Cut-out 15.75" x 15.75"	NULLA	1A3790000.00.00	



Masonry Box				Not included
	Dimensions 7.44" x 17.52"	NULLA 18	1A2390000.00.00	



Masonry Box				Not included
	Dimensions 7.44" x 17.52"	NULLA 25	1A2380000.00.00	





/ 2021

A tool to light.

The luminaire is pure form, a simple container for the light source.

Light is incorporated into the space, becoming an architectural element.

QUAD / 2021

Matt White - 2700K

Matt White - 3000K

Recessed / Diffuse / Indoor

Material

.03 Matt White Finish

Metal

For installation: plasterboard cut-out 1.57" x 2.36" - Minimum space for mounting 2.55". Note

QUAD

2W

Max 500mA DC

2700K - 128lm / 3000K - 133lm

CRI >90

Driver not included

Certificated 2A-DAGO2 Flexalighting Product

Compulsory accessories

Electrical power supply



Driver LED		Not	tincluded
220-240V(110-127V)	500mA/24W(15W)/IP68/ON/OFF	1Z0241170	

1A1510303.27.20

1A1510303.30.20

Optional accessories


Installation kit




Installation box			Not included
	Plasterboard cut-out 1.57" x 2.36" -	1A1520000.00.00	
	Minimum space for mounting 2.55"		




SYSTEMS

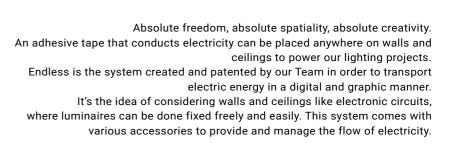

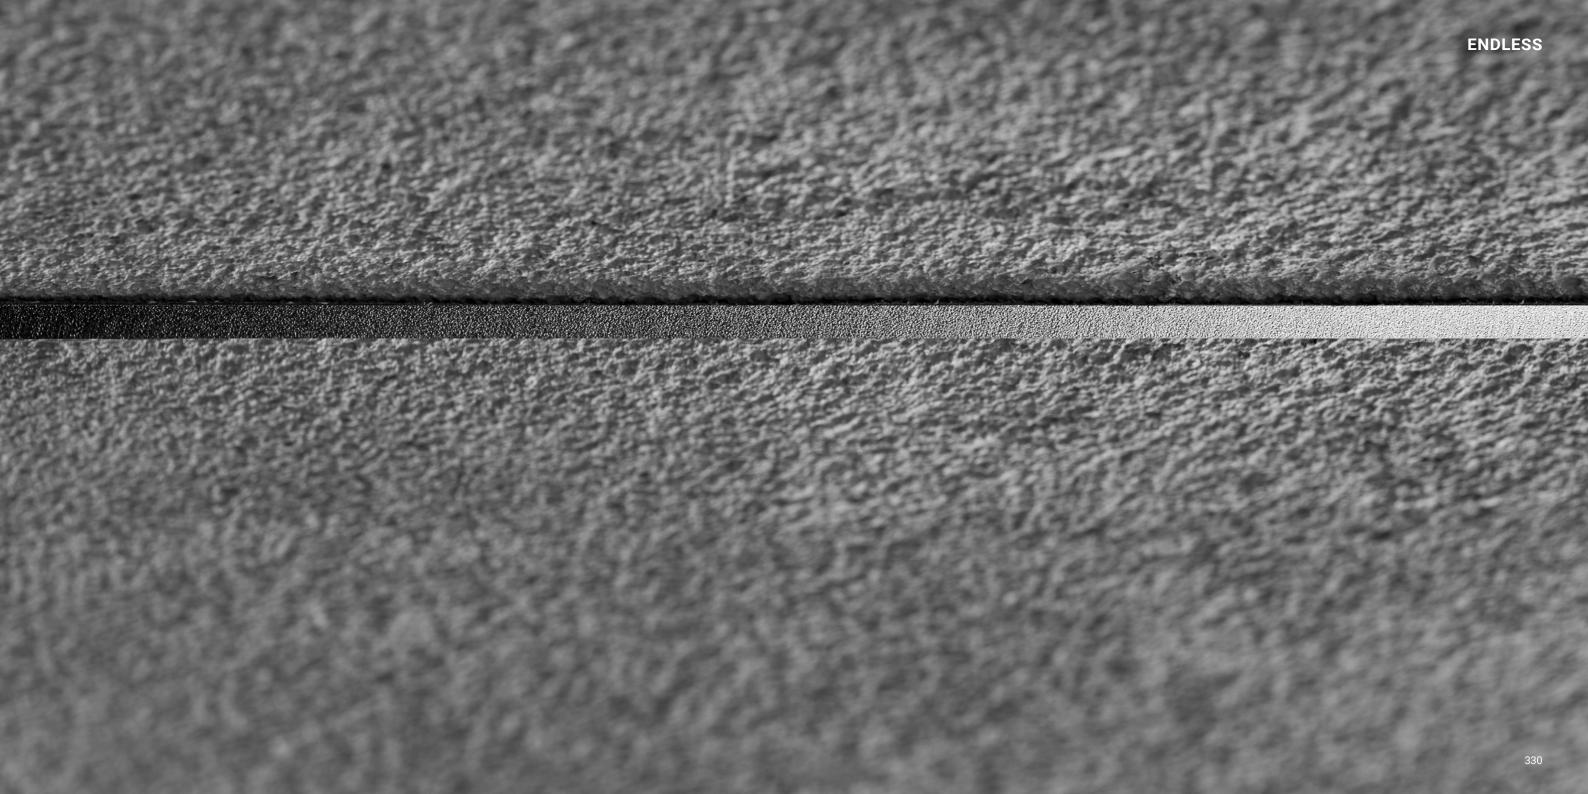

Davide Groppi / 2018

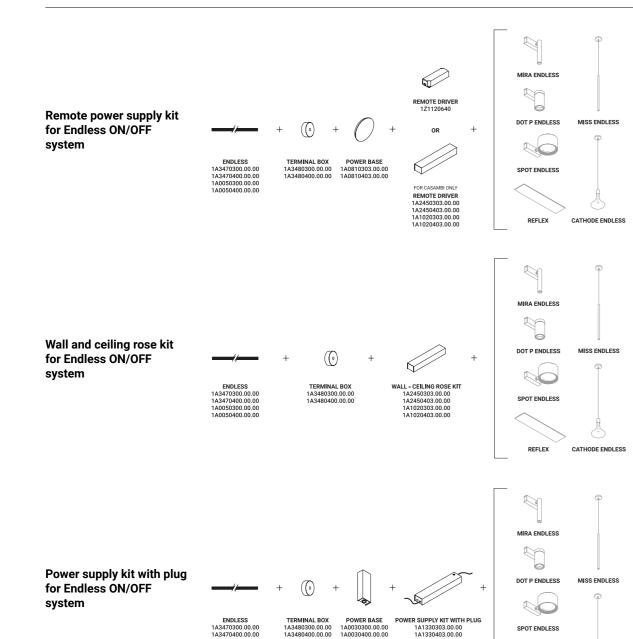


1A0260303 00 00

REFLEX

CATHODE ENDLESS

1A0050300 00 00

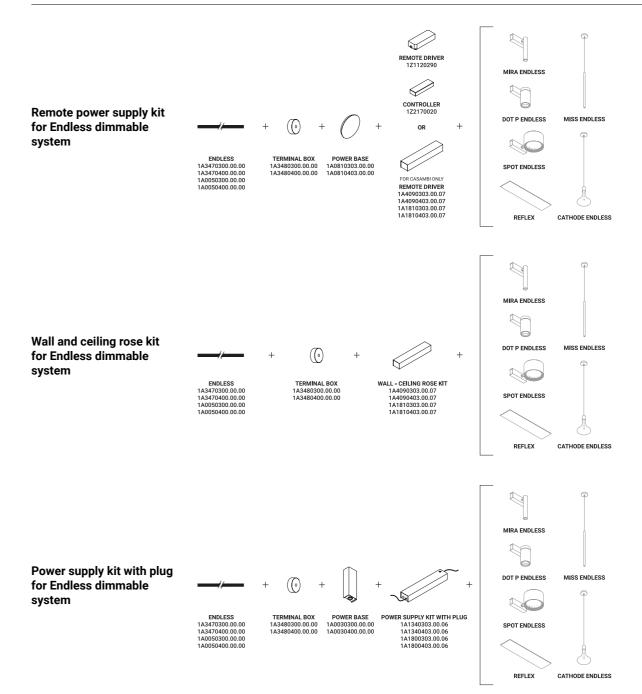

ENDLESS Davide Groppi / 2018

ENDLESS Davide Groppi / 2018

Systems / Diffuse-Direct-Indirect / Indoor

Material Metal

Finish .03 Matt White .04 Matt Black .08 Brushed Brass .26 Total Black

Note Conductive strip that can be applied to walls, ceilings and windows - Possibility of connecting multiple devices simultaneously -

Maximum absorption 4A.



MIRA ENDLESS

7,5W 48V DC

2700K - 327lm / 3000K - 352lm

CRI >90

Driver not included



8,5W 48V DC

2700K - 327lm / 3000K - 352lm

NDLESS CASAMBI	

CRI >90

Driver not included

CASAMBI

MIRA ENDLESS CASAMBI	
----------------------	--

DOT P ENDLESS	

13W 48V DC

2700K / 3000K Driver not included Matt White - 2700K - ENDLESS

Matt Black - 2700K - ENDLESS

Matt Black - 3000K - ENDLESS

Matt White - 2700K - ENDLESS

Matt White - 3000K - ENDLESS

Matt Black - 2700K - ENDLESS

Matt Black - 3000K - ENDLESS

Matt White - 3000K - ENDLESS

Matt White - 2700K - ENDLESS - CASAMBI

Matt White - 3000K - ENDLESS - CASAMBI

Matt Black - 2700K - ENDLESS - CASAMBI

Matt Black - 3000K - ENDLESS - CASAMBI

1A2340303.27.40 1A2340303.30.40 1A2340403.27.40

1A2340403.30.40

1A2280303.27.40

1A2280303.30.40

1A2280403.27.40

1A2280403.30.40

1A2280303.27.41

1A2280303.30.41

1A2280403.27.41

1A2280403.30.41



DOT P ENDLESS CASAMBI

15,5W 48V DC 2700K / 3000K Driver not included

CASAMBI

Matt White - 2700K - ENDLESS - CASAMBI 1A2340303.27.41 1A2340303.30.41 Matt White - 3000K - ENDLESS - CASAMBI 1A2340403.27.41 Matt Black - 2700K - ENDLESS - CASAMBI 1A2340403.30.41 Matt Black - 3000K - ENDLESS - CASAMBI




SPOT ENDLESS

Max 13W 48V DC Driver not included LED Module not included

Matt White - ENDLESS Matt Black - ENDLESS

1A1080303.00.40 1A1080403.00.40



SPOT ENDLESS CASAMBI

Max 15,5W 48V DC Driver not included CASAMBI LED Module not included

Matt White - ENDLESS - CASAMBI Matt Black - ENDLESS - CASAMBI 1A1080303.00.41 1A1080403.00.41



REFLEX

23W 48V DC

2700K - 2158lm / 3000K - 2320lm CRI >90

Driver not included


Matt Black - 2700K Matt Black - 3000K 1A0850403.27.20 1A0850403.30.20

ENDLESS Davide Groppi / 2018

1.57	31 <u>"</u>
	118.11"
29.53"	

MISS ENDLESS 6,3W 120V 2700K - 290lm / 3000K - 310lm CRI >90

Matt White - 2700K - ENDLESS 1A2960303.27.40 Matt White - 3000K - ENDLESS 1A2960303.30.40 Matt Black - 2700K - ENDLESS 1A2960403.27.40 1A2960403.30.40 Matt Black - 3000K - ENDLESS 1A2960803.27.40 Brushed Brass - 2700K - ENDLESS 1A2960803.30.40 Brushed Brass - 3000K - ENDLESS Total Black - 2700K - ENDLESS 1A2962603.27.40 Total Black - 3000K - ENDLESS 1A2962603.30.40



CATHODE ENDLESS

Driver not included

6,3W
48V DC
2700K - 264lm / 3000K - 284lm
CRI >90
Driver not included

latt White - 2700K - ENDLESS	1A2980303.27.40
latt White - 3000K - ENDLESS	1A2980303.30.40
	1A2980803.27.40
	1A2980803.30.40
doned Brado Goodk ENDEEGO	1712700000.00.10

Davide Groppi / 2018

Compulsory accessories

Installation kit



Strip Endless - 196.85"			Not included
Matt White	Output 48V - Max 150W - Max 4A	1A3470300.00.00	
Matt Black	Output 48V - Max 150W - Max 4A	1A3470400.00.00	

ENDLESS



3.70"	Not included
Output 48V - Max 150W - Max 4A	1A0050300.00.00
Output 48V - Max 150W - Max 4A	1A0050400.00.00
	Output 48V - Max 150W - Max 4A



Fixing rough walls kit	Not included
Lenght 98.42"	1A0370000.00.00



Terminal box			Not included
Matt White	2 Terminals included	1A3480300.00.00	
Matt Black	2 Terminals included	1A3480400.00.00	



Power base	Not included
Matt White	1A0030300.00.00
Matt Black	1A0030400.00.00



Power base for installation with remote kit	Not include
Matt White	1A0810303.00.00
Matt Black	1A0810403.00.00



Terminals	Not included
2 Pieces	1A3490000.00.00

ENDLESS

Davide Groppi / 2018

Davide Groppi / 2018 ENDLESS

Compulsory accessories

LED modules



G111 LED Module			Not include
	11,7W - 15° - 350mA DC - 2700K - 1068lm - CRI 90 - Energy Efficiency F - Dimmable	SPOT ENDLESS	1A4700003.27.20
	11,7W - 15° - 350mA DC - 3000K - 1091lm - CRI 90 - Energy Efficiency F - Dimmable		1A4700003.30.20



DG111 LED Module				Not included
	11,7W - 22° - 350mA DC - 2700K - 1508lm - CRI 90 - Energy Efficiency F - Dimmable	SPOT ENDLESS	1A3890003.27.20	
	11,7W - 22° - 350mA DC - 3000K - 1578lm - CRI 90 - Energy Efficiency F - Dimmable		1A3890003.30.20	



DG111 LED Module				Not included
	11,7W - 36° - 350mA DC - 2700K - 1266lm - CRI 90 - Energy Efficiency F - Dimmable	SPOT ENDLESS	1A3900003.27.20	
	11,7W - 36° - 350mA DC - 3000K - 1323lm - CRI 90 - Energy Efficiency F - Dimmable		1A3900003.30.20	

Other accessories



Lens				Not included
Beam - 14°	2700K - 983lm	DOT P ENDLESS	1A3090000.00.00	
	3000K - 1038lm			
Beam - 24°	2700K - 943lm	DOT P ENDLESS	1A3100000.00.00	
	3000K - 996lm			
Beam - 36°	2700K - 955lm	DOT P ENDLESS	1A3110000.00.00	
	3000K - 1005lm			
Beam - 50°	2700K - 965lm	DOT P ENDLESS	1A3120000.00.00	
	3000K - 1016lm			

Compulsory accessories


Electrical power supply for ENDLESS ON/OFF system and CASAMBI



Power supply kit with plug		Not included
Matt White	Input 120V - 60Hz - Output 48V - 60W - IP20 - ON/OFF	1A1330303.00.00
Matt Black	Input 120V - 60Hz - Output 48V - 60W - IP20 - ON/OFF	1A1330403.00.00



Wall/ceiling/remote power supply kit		Not included
Matt White	Input 120V - 60Hz - Output 48V - 60W - IP20 - ON/OFF	1A2450303.00.00
Matt Black	Input 120V - 60Hz -	1A2450403.00.00




Power supply kit with plug		Not included
Matt White	Input 120V - 60Hz - Output 48V - 90W - IP20 - ON/OFF	1A0260303.00.00
Matt Black	Input 120V - 60Hz - Output 48V - 90W - IP20 - ON/OFF	1A0260403.00.00



Wall/ceiling/remote power supply kit		Not included
Matt White	Input 120V - 60Hz - Output 48V - 90W - IP20 - ON/OFF	1A1020303.00.00
Matt Black	Input 120V - 60Hz - Output 48V - 90W - IP20 - ON/OFF	1A1020403.00.00

Electrical power supply for ENDLESS dimmable system



Power supply kit with plug		Not included
Matt White	Input 120V - 60Hz - Output 48V - 60W - IP20 - Dimmer on board	1A1340303.00.06
Matt Black	Input 120V - 60Hz - Output 48V - 60W - IP20 - Dimmer on board	1A1340403.00.06



all/ceiling/remote power supply kit		Not included
att White	Input 120V - 60Hz - Output 48V - 60W - IP20 - DALI - PUSH - 1-10V	1A4090303.00.07
att Black	Input 120V - 60Hz - Output 48V - 60W - IP20 - DALI - PUSH - 1-10V	1A4090403.00.07


ENDLESS

Davide Groppi / 2018

Davide Groppi / 2018

Compulsory accessories

Electrical power supply for ENDLESS dimmable system



Power supply kit with plug		Not inclu	
Matt White	Input 120V - 60Hz - Output 48V - 90W - IP20 - Dimmer on board	1A1800303.00.06	
Matt Black	Input 120V - 60Hz - Output 48V - 90W - IP20 - Dimmer on board	1A1800403.00.06	



Wall/ceiling power supply kit		Not included
Matt White	Input 120V - 50/60Hz - Output 48V - 90W - IP20 - DALI - PUSH - 1-10V	1A1810303.00.07
Matt Black	Input 120V - 50/60Hz - Output 48V - 90W - IP20 - DALI - PUSH - 1-10V	1A1810403.00.07

Electrical power supply for ENDLESS remote system



Driver LED		Not included
100-240V	48V/60W/IP67/ON/OFF	1Z1120640




Driver LED		Not included
100-240V	48V/90W/IP20/1-10V	1Z1120290



Controller		Not included
Matt Black	DALI - PUSH - 0/1-10V - IP20	1Z2170020

Optional accessories

Other accessories



Horizontal directional fins			Not included
Matt Black	SPOT ENDLESS	1X0070400.01.00	



Cylindrical screen		Not included
Matt Black	SPOT ENDLESS 1X0070400.02.00	



Cone 45°			Not included
Matt Black	SPOT ENDLESS	1X0070400.03.00	



	Not included
Matt Black SPOT ENDLESS 1X0070400.04.0	00



Accessory holder + Elliptical filter			Not included
Matt Black	SPOT ENDLESS	1X0070400.05.00	



Blue filter		Not i	ncluded
Standard	SPOT ENDLESS	1X0070000.06.00	



Red filter			Not included
Standard	SPOT ENDLESS	1X0070000.07.00	
		·	



Yellow filter			Not included
Standard	SPOT ENDLESS	1X0070000.08.00	

350


ENDLESS

ENDLESS Davide Groppi / 2018


Integrated products with END	DLESS system - Absorption Max 1,875 A	Wattage	Ampere (A)
Power Kit:			
1A133XX03.00.00	Power supply kit with plug - 48V - Not dimmable	60	Max 1,25
1A245XX03.00.00	Wall ceiling rose kit - remote - 48V - Not dimmable	60	Max 1,25
1A134XX03.00.06	Power supply kit with plug - 48V - Dimmable	60	Max 1,25
1A409XX03.00.07	Wall ceiling rose kit - 48V - DALI - PUSH - 1-10V Dimmable	60	Max 1,25
1Z1120640	Remote driver - 48V - Not dimmable	60	Max 1,25
1Z1120290	Remote driver - 48V - Not dimmable	90	Max 1,875
1A026XX03.00.00	Power supply kit with plug - 48V - Not dimmable	90	Max 1,875
1A102XX03.00.00	Wall ceiling rose kit - Remote - 48V - Not dimmable	90	Max 1,875
1A180XX03.00.06	Power supply kit with plug - 48V - Dimmable	90	Max 1,875
1A181XX03.00.07	Wall ceiling rose kit - 48V - DALI - PUSH - 1-10V Dimmable	90	Max 1,875
Elements:			
1A2980303.27.40	CATHODE - Matt White - 2700K - ENDLESS	5,5	0,14
1A2980303.30.40	CATHODE - Matt White - 3000K - ENDLESS	5,5	0,14
1A2980803.27.40	CATHODE - Brushed Brass - 2700K - ENDLESS	5,5	0,14
1A2980803.30.40	CATHODE - Brushed Brass - 3000K - ENDLESS	5,5	0,14
1A2340303.27.40	DOT P - Matt White - 2700K - ENDLESS	13	0,34
1A2340303.30.40	DOT P - Matt White - 3000K - ENDLESS	13	0,34
1A2340403.27.40	DOT P - Matt Black - 2700K - ENDLESS	13	0,34
1A2340403.30.40	DOT P - Matt Black - 3000K - ENDLESS	13	0,34
1A2340303.27.41	DOT P - Matt White - 2700K - ENDLESS - CASAMBI	15,5	0,4
1A2340303.30.41	DOT P - Matt White - 3000K - ENDLESS - CASAMBI	15,5	0,4
1A2340403.27.41	DOT P - Matt Black - 2700K - ENDLESS - CASAMBI	15,5	0,4
1A2340403.30.41	DOT P - Matt Black - 3000K - ENDLESS - CASAMBI	15,5	0,4
1A2280303.27.40	MIRA - Matt White - 2700K - ENDLESS	6	0,16
1A2280303.30.40	MIRA - Matt White - 3000K - ENDLESS	6	0,16
1A2280403.27.40	MIRA - Matt Black - 2700K - ENDLESS	6	0,16
1A2280403.30.40	MIRA - Matt Black - 3000K - ENDLESS	6	0,16
1A2280303.27.41	MIRA - Matt White - 2700K - ENDLESS - CASAMBI	8,5	0,22
1A2280303.30.41	MIRA - Matt White - 3000K - ENDLESS - CASAMBI	8,5	0,22
1A2280403.27.41	MIRA - Matt Black - 2700K - ENDLESS - CASAMBI	8,5	0,22
1A2280403.30.41	MIRA - Matt Black - 3000K - ENDLESS - CASAMBI	8,5	0,22
1A2960303.27.40	MISS - Matt White - 2700K - ENDLESS	5,5	0,14
1A2960303.30.40	MISS - Matt White - 3000K - ENDLESS	5,5	0,14
1A2960403.27.40	MISS - Matt Black - 2700K - ENDLESS	5,5	0,14
1A2960403.30.40	MISS - Matt Black - 3000K - ENDLESS	5,5	0,14
1A2960803.27.40	MISS - Brushed Brass - 2700K - ENDLESS	5,5	0,14
1A2960803.30.40	MISS - Brushed Brass - 3000K - ENDLESS	5,5	0,14
1A2962603.27.40	MISS - Matt Total Black - 2700K - ENDLESS	5,5	0,14
1A2962603.30.40	MISS - Matt Total Black - 3000K - ENDLESS	5,5	0,14

Davide Groppi / 2018 ENDLESS


Integrated products with ENDLESS system - Absorption Max 1,875 A Wattage		Wattage	Ampere (A)	
Elements:				
1A0850403.27.20	REFLEX - Matt Black - 2700K - ENDLESS	23	0,57	
1A0850403.30.20	REFLEX - Matt Black - 3000K - ENDLESS	23	0,57	
1A1080303.00.40	SPOT - Matt White - ENDLESS	13	0,34	
1A1080403.00.40	SPOT - Matt Black - ENDLESS	13	0,34	
1A1080303.00.41	SPOT - Matt White - ENDLESS - CASAMBI	15,5	0,4	
1A1080403.00.41	SPOT - Matt Black - ENDLESS - CASAMBI	15,5	0,4	

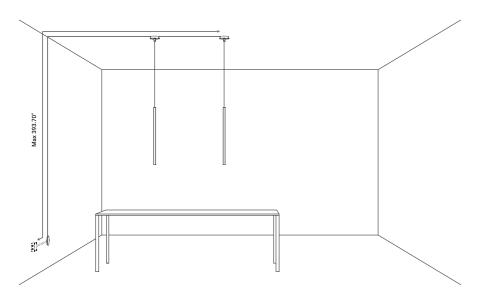


MISS ENDLESS - Installation with Endless and remote power supply kit

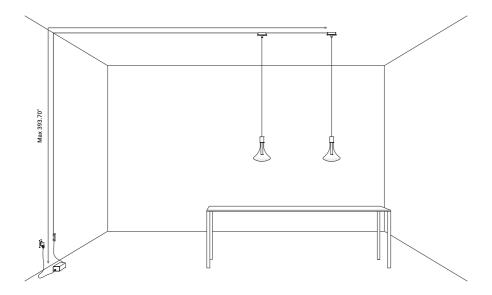


CATHODE ENDLESS - Installation with Endless and power supply kit with plug



REFLEX - Installation with Endless and power supply kit with plug








REFLEX - Installation with Endless and remote power supply kit

times the speed of light.



1A2130303.27.20 1A2130303.30.20 1A2130403.27.20

How to order -

FLASH 6



Davide Groppi / 2017

Material

.03 Matt White Finish

Metal

.04 Matt Black


Note

LED module 236.22" / 472.44" long available with dual emission - LED module 196.85" / 393.70" long with Tunable White technology available with dual emission - Harmonic steel strip 0.39" wide - Can be cut every 1.90".

Matt White - 2700K

Matt White - 3000K Matt Black - 2700K

Matt Black - 3000K



FLASH 6

Length 236.22" Max 45W 24V DC

2700K - 5592lm / 3000K - 5700lm CRI >90

Driver not included

1A2130303.27.20 1A2130303.30.20 1A2130403.27.20

1A2130403.30.20

FLASH 12

C UL US

Length 472.44" Max 90W

24V DC

2700K - 11184lm / 3000K - 11400lm CRI >90

Driver not included

CULUSTED

Matt White - 2700K Matt White - 3000K Matt Black - 2700K Matt Black - 3000K

Matt Black - 2700K

Matt Black - 3000K

1A2150303.27.20 1A2150303.30.20 1A2150403.27.20

1A2150403.30.20

FLASH 18

Length 708.66" Max 135W

24V DC 2700K - 16758lm / 3000K - 20124lm

CRI >90 Driver not included

1A2900303.27.20 Matt White - 2700K Matt White - 3000K 1A2900303.30.20

1A2900403.27.20

1A2900403.30.20


REMOTE DRIVER REMOTE DRIVER CONTROLLER SPACER 1A4930300.00.00 POWER SUPPLY KIT WITH PLUG 1X0060303.03.06 1X0060403.03.06 1A4930400.00.00 How to order -OR FLASH 12 FLASH 12 1A2150303.27.20 1A2150303.30.20 FOR TRIAC DIMMING REMOTE DRIVER 1A2150403.27.20 1A2150403.30.20 REMOTE DRIVER CONTROLLER 1Z1120540 REMOTE DRIVER CONTROLLER How to order -OR FLASH 18 FLASH 18 1A2900303.27.20 1A2900303.30.20 FOR TRIAC DIMMING REMOTE DRIVER 1Z2020060 1A2900403.30.20

SPACER 1A4930300.00.00 1A4930400.00.00


POWER SUPPLY KIT WITH PLUG 1X0060303.03.06 1X0060403.03.06


FOR TRIAC DIMMING

OR



Davide Groppi / 2017

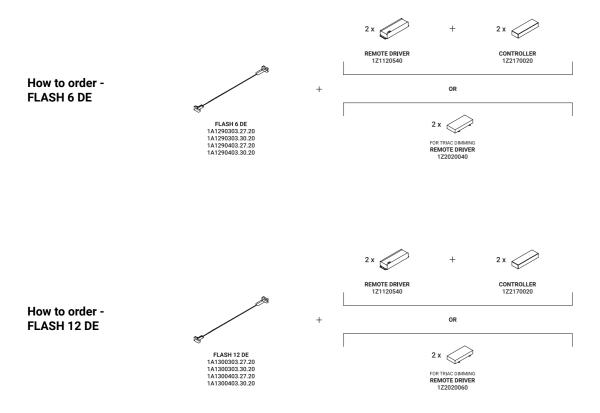



FLASH 6 DE
Length 236.22" Dual emission and double switch
Max 90W
24V DC
2700K - Up 5592lm - Down 5592lm /
3000K - Up 5700lm - Down 5700lm
CRI >90


Driver not included

 Matt White - 2700K
 1A1290303.27.20

 Matt White - 3000K
 1A1290303.30.20

 Matt Black - 2700K
 1A1290403.27.20

 Matt Black - 3000K
 1A1290403.30.20



FLASH 12 DE
Length 472.44" Dual emission and double switch
Max 180W
24V DC
2700K - Up 11184lm - Down 11184lm /
3000K - Up 11400lm - Down 11400lm
CRI >90
Driver not included

 Matt White - 2700K
 1A1300303.27.20

 Matt White - 3000K
 1A1300303.30.20

 Matt Black - 2700K
 1A1300403.27.20

 Matt Black - 3000K
 1A1300403.30.20

Note


Tunable White describes the variable colour temperature controls from warm white to cool white light.






How to order -

FLASH 5 TW





FLASH 5 TW Length 196.85" - Tunable White Max 50W

24V DC 2700/6500K - 7650lm CRI >90


Driver not included

Matt White - 2700/6500K Matt Black - 2700/6500K

Matt White - 2700/6500K

Matt Black - 2700/6500K

1A4820303.96.20 1A4820403.96.20



FLASH 10 TW

Length 393.70" - Tunable White Max 100W 24V DC 2700/6500K - 15300lm CRI >90


Driver not included

1A4830303.96.20 1A4830403.96.20

Note

Tunable White describes the variable colour temperature controls from warm white to cool white light.






How to order -

FLASH 5 DE TW





FLASH 5 DE TW

Length 196.85" - Dual emission -Tunable White


Max 100W 24V DC

2700/6500K - 15300lm

CRI >90

Driver not included

Matt White - 2700/6500K 1A4840303.96.20 Matt Black - 2700/6500K 1A4840403.96.20



FLASH 10 DE TW

Length 393.70" - Dual emission - Tunable White

Max 200W 24V DC

2700/6500K - 30600lm

CRI >90

Driver not included

Matt White - 2700/6500K Matt Black - 2700/6500K 1A4850303.96.20 1A4850403.96.20 **FLASH**

Davide Groppi / 2017

Davide Groppi / 2017

Compulsory accessories

Installation kit



Spacer				Not included
Matt White	For power supply kit with plug	FLASH 6 / FLASH 12	1A4930300.00.00	
Matt Black	For power supply kit with plug	FLASH 6 / FLASH 12	1A4930400.00.00	

Electrical power supply



	13:
3.2	1.60











Spacer				Not included
Matt White	For power supply kit with plug	FLASH 6 / FLASH 12	1A4930300.00.00	
Matt Black	For power supply kit with plug	FLASH 6 / FLASH 12	1A4930400.00.00	

Power supply kit with plug		Not included		
Matt White	Input 120V - 60Hz - Output 24V - Max 90W - IP20	FLASH 6 / FLASH 12	1X0060303.03.06	
Matt Black	Input 120V - 60Hz - Output 24V - Max 90W - IP20	FLASH 6 / FLASH 12	1X0060403.03.06	

Driver LED				Not included
120-277V	24V/60W/IP20/TRIAC - 1-10V	FLASH 6 / FLASH 6 DE	1Z2020040	

Driver LED				Not included
120-277V	24V/96W/IP20/TRIAC - 1-10V	FLASH 12 / FLASH 18 / FLASH 12 DE	1Z2020060	

Driver LED			Not included
100-240V	24V/96W/IP67/1-10V	FLASH 6 / FLASH 12 / 1Z1120540	
		FLASH 18 / FLASH 6 DE /	
		FLASH 12 DE /	
		FLASH 5 TW /	
		FLASH 10 TW /	
		FLASH 5 DE TW /	
		FLASH 10 DE TW	

Controller				Not included
Matt Black	DALI - PUSH - 0/1-10V - IP20	FLASH 6 / FLASH 12 / FLASH 18 / FLASH 6 DE / FLASH 12 DE	1Z2170020	

Controller Casambi - Tunable White			Not included
	FLASH 5 TW /	1Z0830880	
	FLASH 10 TW /		
	FLASH 5 DE TW /		
	FLASH 10 DE TW		

Optional accessories

Installation kit



Wall and ceiling rose	Not included
Matt White	1A3440303.00.00
Matt Black	1A3440403.00.00

FLASH



Ceiling connection kit	Not inc	cluded
Matt Black	1A0080400.00.00	














Kit wall connection vertical sloped 45°	Not included
Matt Black	1A0120400.00.00


Kit wall connection sloped right 75°	Not includ
Matt Black	1A0340400.00.00


Kit wall connection sloped left 75°	Not included
Matt Black	1A0350400.00.00


		Not included
FLASH 6 / FLASH 12 /	1X0090300.01.00	
FLASH 18 / FLASH 6 DE /	1X0090400.01.00	
FLASH 12 DE /		
FLASH 5 TW /		
FLASH 10 TW /		
FLASH 5 DE TW /		
FLASH 10 DE TW		
	FLASH 18 / FLASH 6 DE / FLASH 12 DE / FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW /	FLASH 18 / FLASH 6 DE / 1X0090400.01.00 FLASH 12 DE / FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW /

Swallows	Not inclu	Jded
Matt Black	1A0800400.00.00	













1A0080400.00.00 - Ceiling connection kit

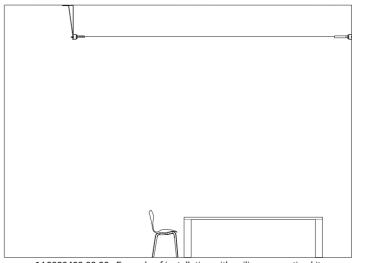


1A0080400.00.00 - Example of installation with ceiling connection kit

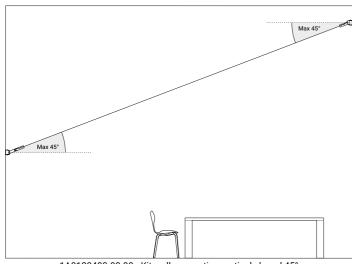



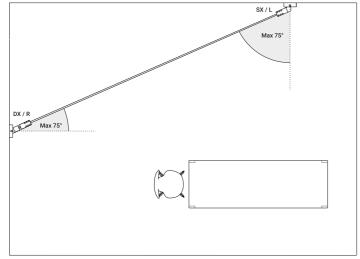

1A0340400.00.00 - 1A0350400.00.00 - Kit wall connection sloped 75°

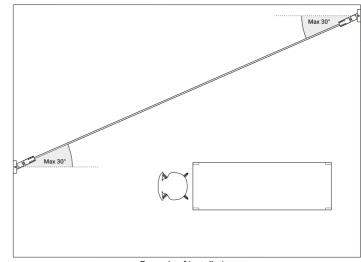

Example of installation

INFINITO

Davide Groppi / 2016

A spatial concept, it is continuous light.

An ultra-thin strip of special stainless steel just 18 mm wide "cuts" the space to produce indirect light. Infinito can be adapted to various situations, stretched from wall to wall or ceiling to floor. It comes in strips up to 36 metres in length (standard versions at 6 / 12 metres in length).

Infinito breaks down the luminaire, turning it into something else, leaving only a trace, a line and then not even that, just light. This project pays homage to the art of Lucio Fontana and his spatial concepts. The graphic force of this system is surprising. It can be integrated into space, but at the same time it becomes part of that space. Infinito: essence and absence.

Archiproducts Design Award 2017 People's Choice AZ Award 2017

INFINITO 6

1A2250303.27.20

1A2250303.30.20

1A2250403.27.20

INFINITO 12

1A2260303.27.20

1A2260303.30.20


1A2260403.27.20 1A2260403.30.20



Material

.03 Matt White Finish .04 Matt Black

Note LED module 236.22" / 472.44" / 708.66" long - LED module 196.85" / 393.70" long with Tunable White technology - Harmonic steel strip 0.75" wide -Can be cut every 1.90".



Wall-Systems / Indirect / Indoor

Metal

INFINITO 6 Length 236.22"

> Max 45W 24V DC 2700K - 5592lm / 3000K - 5700lm

CRI >90 Driver not included

Matt White - 2700K

Matt White - 3000K Matt Black - 2700K


Matt Black - 3000K

1A2250303.27.20

1A2250303.30.05 1A2250403.27.20

1A2250403.30.05

C UL US



INFINITO 12

Length 472.44" Matt White - 2700K Max 90W Matt White - 3000K 24V DC Matt Black - 2700K 2700K - 11184lm / 3000K - 11400lm CRI >90

Matt Black - 3000K

Matt White - 2700K

Matt White - 3000K

Matt Black - 2700K


Matt Black - 3000K

1A2260303.27.20 1A2260303.30.20 1A2260403.27.20

1A2260403.30.20

C UL US

Driver not included



INFINITO 18

Length 708.66" Max 135W 24V DC 2700K - 16758lm / 3000K - 20124lm CRI >90 Driver not included

1A2270303.27.20 1A2270303.30.20 1A2270403.27.20

1A2270403.30.20

How to order -**INFINITO 18**

How to order -


How to order -


INFINITO 12

INFINITO 6



1A2270403.30.20





SPACER 1A4930300.00.00 1A4930400.00.00

REMOTE DRIVER

SPACER 1A4930300.00.00

1A4930400.00.00

REMOTE DRIVER

1Z1120540

POWER SUPPLY KIT WITH PLUG 1X0060303.03.06 1X0060403.03.06

FOR TRIAC DIMMING REMOTE DRIVER

POWER SUPPLY KIT WITH PLUG 1X0060303.03.06 1X0060403.03.06

FOR TRIAC DIMMING REMOTE DRIVER

OR

CONTROLLER

OR

CONTROLLER

Note


Tunable White describes the variable colour temperature controls from warm white to cool white light.




How to order -INFINITO 10 TW

How to order -

INFINITO 5 TW





INFINITO 5 TW Length 196.85" - Tunable White Max 50W 24V DC

2700/6500K - 7650lm CRI >90

Driver not included

500K - 7650lm


Matt White - 2700/6500K

Matt Black - 2700/6500K

Matt White - 2700/6500K

Matt Black - 2700/6500K

1A4860303.96.20 1A4860403.96.20



INFINITO 10 TW

Length 393.70" - Tunable White Max 100W 24V DC 2700/6500K - 15300lm CRI >90

Driver not included

1A4870303.96.20 1A4870403.96.20

INFINITO

Davide Groppi / 2016

INFINITO Davide Groppi / 2016

Optional accessories Installation kit

Installation kit

Compulsory accessories



Spacer				Not included
Matt White	For power supply kit with plug	INFINITO 6 / INFINITO 12	1A4930300.00.00	
Matt Black	For power supply kit with plug	INFINITO 6 / INFINITO 12	1A4930400.00.00	

Electrical power supply















Spacer				Not included
Matt White	For power supply kit with plug	INFINITO 6 / INFINITO 12	1A4930300.00.00	
Matt Black	For power supply kit with plug	INFINITO 6 / INFINITO 12	1A4930400.00.00	

Power supply kit	with plug			Not included
Matt White	Input 120V - 60Hz - Output 24V - Max 90W - IP20	INFINITO 6 / INFINITO 12	1X0060303.03.06	
Matt Black	Input 120V - 60Hz - Output 24V - Max 90W - IP20	INFINITO 6 / INFINITO 12	1X0060403.03.06	

Driver LED				Not included
120-277V	24V/60W/IP20/TRIAC - 1-10V	INFINITO 6	1Z2020040	

Driver LED			Not included
120-277V	24V/96W/IP20/TRIAC - 1-10V	INFINITO 12 / INFINITO 18 1Z2020060	

Driver LED			Not included
100-240V	24V/96W/IP67/1-10V	INFINITO 6 / INFINITO 12 / 1Z1120540 INFINITO 18 / INFINITO 5 TW / INFINITO 10 TW	
Controller			Not included
Matt Black	DALI - PUSH - 0/1-10V - IP20	INFINITO 6 / INFINITO 12 / 1Z2170020 INFINITO 18	

Controller Casambi - Tunable White			Not included
	INFINITO 5 TW /	1Z0830880	
	INFINITO 10 TW		



Wall/ceiling rose	Not included
Matt White	1A3440303.00.00
Matt Black	1A3440403.00.00



Ceiling connection kit	Not includ
Matt Black	1A0080400.00.00



Kit wall connection vertical sloped 45°		Not included
Matt Black	1A0120400.00.00	



Kit wall connection sloped right 75°	Not included
Matt Black	1A0340400.00.00



Kit wall connection sloped left 75°	Not included
Matt Black	1A0350400.00.00





Wall back plate		Not include
Matt White	INFINITO 6 /	1X0090300.01.00
Matt Black	INFINITO 12 /	1X0090400.01.00
	INFINITO 18 /	17,0030 100.01.00
	INFINITO 5 TW /	
	INFINITO 10 TW	




Swallows		Not included
Matt Black	1A0290400.00.00	_


INFINITO **INFINITO** Davide Groppi / 2016 Davide Groppi / 2016






Power supply kit with plug








1A0080400.00.00 - Ceiling connection kit

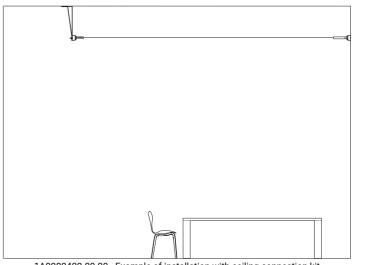


1A0080400.00.00 - Example of installation with ceiling connection kit





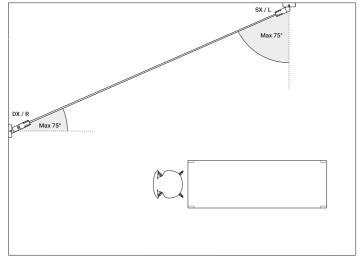

1A0340400.00.00 - 1A0350400.00.00 - Kit wall connection sloped 75°

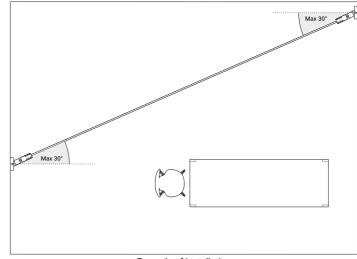

Example of installation





Davide Groppi / 2019

Light runs on a wire. An almost imperceptible wire, suspended in space.

Like a tightrope walker on a thin rope, the light reaches everywhere, weightless and wonderful. Ohm is an electro mechanic project that takes maximum advantage of the characteristics of luminous diodes.

Its secret is a special unipolar wire stretched from wall to wall.

Where the light comes from is discreetly hidden, giving all the attention to what it is illuminating.

It is possible to replace the light source even with the luminaire assembled.

Selection for ADI Design Index 2020

0

WIRE GUIDE

1A3040400.00.0



Material Metal - PA

Davide Groppi / 2019

Finish .04 Matt Black

Note Special single-pole cable running between two walls and ceiling - Max 4 OHM SPOT on unipolar wire.



OHM SPOT

Max 350mA DC 2700K / 3000K



Matt Black - 2700K

Matt Black - 3000K

1A3000403.27.20

1A3000403.30.20

CUL)US

Wall and ceiling rose version

Suspension version

Remote driver version



0 OHM SPOT 1A3000403.27.20 1A3000403.30.20

6

LENS 1A3090000.00.00 1A3100000.00.00

1A3110000.00.00 1A3120000.00.00

LENS 1A3090000.00.00 1A3100000.00.00 1A3110000.00.00 1A3120000.00.00



1A3010303.00.07

REMOTE DRIVER

1Z0240530.350

UNIPOLAR WIRE

1A3070000.00.00 1A3080000.00.00

TIE RODS

1A3020303.00.00

WIRE GUIDE

UNIPOLAR WIRE

1A3060000.00.00

1A3070000.00.00

1A3080000.00.00





OHM SPOT 1A3000403.27.20 1A3000403.30.20

WEIGHT KIT 1A3050000.00.00











OR











CRI 95

Driver not included

Compulsory accessories

Installation kit



Tie rods (positive/negative)		Not included
Matt White	2 Pieces	1A3020303.00.00



Unipolar wire - 472.44"	Not included
Max 60V DC	1A3060000.00.00
Unipolar wire - 944.88"	Not included
Max 60V DC	1A3070000.00
Unipolar wire - 1889.76"	Not included
Max 60V DC	1A3080000.00.00

OHM Davide Groppi / 2019

Compulsory accessories

Other accessories



Lens			Not included
Beam - 12°	2700K - CRI 95 - 272lm	OHM SPOT	1A3090000.00.00
	3000K - CRI 95 - 288lm		
Beam - 24°	2700K - CRI 95 - 271lm	OHM SPOT	1A3100000.00.00
	3000K - CRI 95 - 286lm		
Beam - 39°	2700K - CRI 95 - 257lm	OHM SPOT	1A3110000.00.00
	3000K - CRI 95 - 273lm		
Beam - 54°	2700K - CRI 95 - 254lm	OHM SPOT	1A3120000.00.00
	3000K - CRI 95 - 270lm		

Electrical power supply



Wall/ceiling rose power supply kit		Not included
Matt White	Input 120V - 60Hz Output 350mA DC - 18,5W - IP20 DALI - PUSH - 1-10V	1A3010303.00.07



Driver LED		Not included
220-240V(100-127V)	350mA/18W(18W)/IP20/DALI - PUSH - 1-10V	1Z0240530.350

Optional accessories

Installation kit



Wire guide		Not included
Matt Black	1 Piece	1A3040400.00.00




Weight kit for suspension version	Not included
4 Pieces	1A3050000.00.00













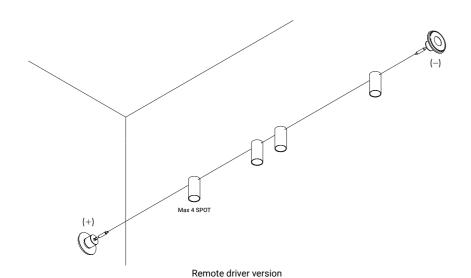


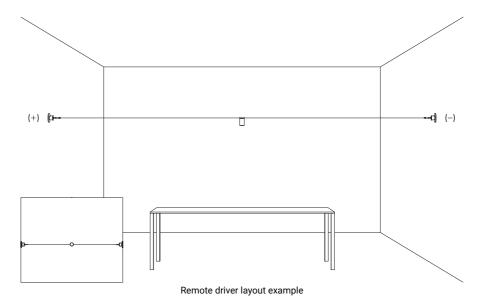


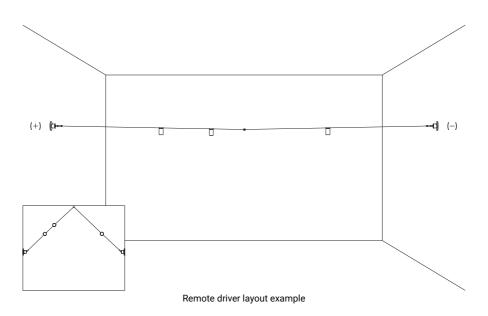


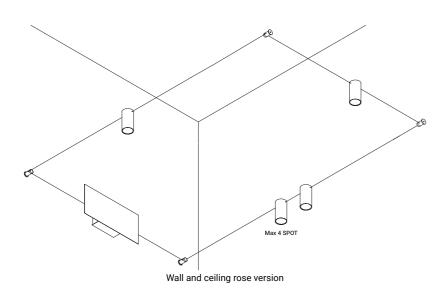


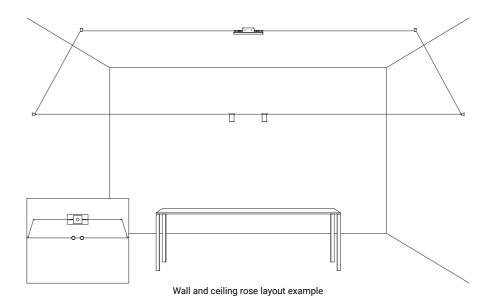

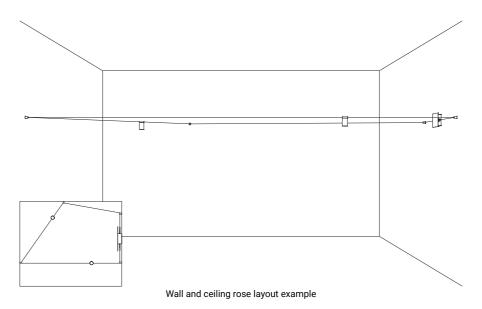

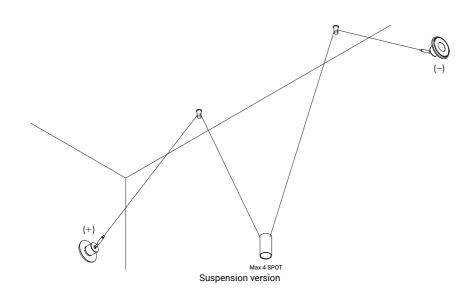

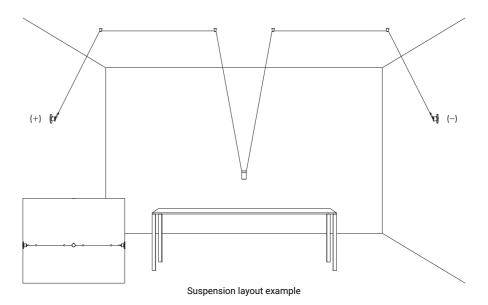

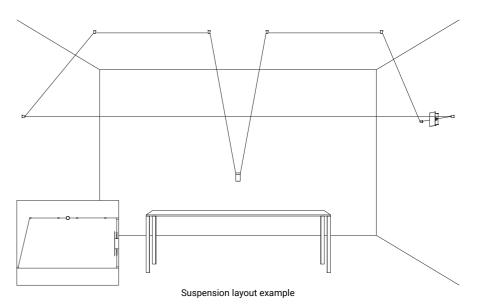



Davide Groppi / 2023

Utopia is a project on the limit state of light, the research for the minimum dimension necessary for pure and essential lighting.

It represents full flexibility, in both its design and its light control.

The light strip reaches into space, bending, breaking and drawing abstract, mysterious patterns.

UTOPIA Davide Groppi / 2023

Standard - 2700K

Standard - 3000K

Standard - 2700K


Standard - 3000K

Systems / Indirect / Indoor

Material Metal

.00 Standard Finish

Note



UTOPIA 6


Length 236.22" Max 79W

24V DC

2700K - 6079lm / 3000K - 6322lm

CRI >90

Driver not included



UTOPIA 12

Length 472.44" Max 125W

24V DC

2700K - 10133lm / 3000K - 10538lm

CRI >90

Driver not included

1A4250003.27.20

1A4250003.30.20

1A4600003.27.20

1A4600003.30.20

Compulsory accessories

Electrical power supply

Davide Groppi / 2023



Driver LED				Not included
120-277V	24V/60W/IP20/TRIAC - 1-10V	UTOPIA 6	1Z2020040	

UTOPIA

403



Driver LED				Not included
120-277V	24V/96W/IP20/TRIAC - 1-10V	UTOPIA 12	1Z2020060	



Driver LED				Not included
100-240V	24V/96W/IP67/1-10V	UTOPIA 6	1Z1120540	



Driver LED	Not			Not included	
100-240V	24V/150W/IP67/1-10V	UTOPIA 12	1Z1120500		



Controller				Not included
Matt Black	DALI - PUSH - 0/1-10V - IP20	UTOPIA 6 / UTOPIA 12	1Z2170020	

Optional accessories

Installation kit



Accessory 1		Not included
Polished Chrome	1A4480100.00.00	



Accessory 2		Not included
Polished Chrome	1A4490100.00.00	



Wall back plate		Not include	de
	Matt Black	1X0090400.02.00	

TRACKS - PROFILES



/ 2007

Pure line in space.
Our Sistema track holds the light solution Dot.

BINARIO TRIFASE / 2007

1A28003 1A28004 1A2800303.14.00 1A2800403.14.00 1A2800303.10.00 1A2800403.10.00 1A2800300.07.00 1A2800400.07.00 1A2800303.05.00 1A2800403.05.00 Power right connector 1A2800303.12.00 1A2800403.12.00 and power left connector 1A2800303.13.00 1A2800403.13.00 installation 1A2800303.09.00 1A2800403.09.00 1A2800303.08.00 1A2800303.11.00 1A2800403.11.00 1A2800303.09.00 1A2800403.09.00 1A2800303.08.00 1A2800403.08.00

BINARIO TRIFASE / 2007

Systems / Diffuse / Indoor

Material

Finish .03 Matt White .04 Matt Black

Note Wall and ceiling track with white and black finish.



Metal

DOT BINARIO

13W 120V 2700K / 3000K

CRI 97

Driver not included

1A2290303.27.01 Matt White - 2700K - DALI Matt White - 3000K - DALI 1A2290303.30.01 1A2290403.27.01 Matt Black - 2700K - DALI

DALI



DOT BINARIO 51

Max 10W 120V

Bulb not included

ON/OFF

Matt White - ON/OFF Matt Black - ON/OFF

Matt Black - 3000K - DALI

1A3710303.00.00 1A3710403.00.00

1A2290403.30.01

BINARIO TRIFASE

/ 2007 BINARIO TRIFASE

Compulsory accessories

Installation kit



Track 39.37"		Not included
Matt White	Input 120V	1A2800303.01.00
Matt Black	Input 120V	1A2800403.01.00



Track 78.74"		Not included
Matt White	Input 120V	1A2800303.02.00
Matt Black	Input 120V	1A2800403.02.00



End cap	Not included
Matt White	1A2800303.07.00
Matt Black	1A2800403.07.00

Other accessories



Lens				Not included
Beam - 14°	2700K - CRI 97 - 983lm	DOT BINARIO	1A3090000.00.00	
	3000K - CRI 97 - 1038lm			
Beam - 24°	2700K - CRI 97 - 943lm	DOT BINARIO	1A3100000.00.00	
	3000K - CRI 97 - 996lm			
Beam - 36°	2700K - CRI 97 - 955lm	DOT BINARIO	1A3110000.00.00	
	3000K - CRI 97 - 1005lm			
Beam - 50°	2700K - CRI 97 - 965lm	DOT BINARIO	1A3120000.00.00	
	3000K - CRI 97 - 1016lm			

Electrical power supply



Power right connector		Not included
Matt White	Input 120V	1A2800303.13.00
Matt Black	Input 120V	1A2800403.13.00



Power left connector		Not included
Matt White	Input 120V	1A2800303.12.00
Matt Black	Input 120V	1A2800403.12.00

Optional accessories

Installation kit

/ 2007

Stucchi cULus certification



Linear connector		Not included
Matt White	Input 120V	1A2800303.11.00
Matt Black	Input 120V	1A2800403.11.00



Internal L connector		Not included
Matt White	Input 120V	1A2800303.09.00
Matt Black	Input 120V	1A2800403.09.00



External L connector			Not included
Matt White	Input 120V	20V 1A2800303.08.00	
Matt Black	Input 120V	1A2800403.08.00	



Right T connecto	or	Not included
Matt White	Input 120V	1A2800303.14.00
Matt Black	Input 120V	1A2800403.14.00



Left T connector		Not included
Matt White	Input 120V	1A2800303.10.00
Matt Black	Input 120V	1A2800403.10.00



X connector		Not included
Matt White	Input 120V	1A2800303.15.00
Matt Black	Input 120V	1A2800403.15.00



Adjustable suspension cable	Not included
Lenght 59.05"	1A2800000.04.00
Adjustable suspension cable	Not included
Lenght 118.11"	1A2800000.05.00
Adjustable suspension cable	Not included
Lenght 196-85"	1A2800000.06.00



 Clamp for track
 Not included

 1A2800300.17.00



/ 2016



FRAMELESS

Layout example

1A2810403.03.00

/ 2016


FRAMELESS

Systems / Direct / Indoor

Material

/ 2016

Finish .03 Matt White .04 Matt Black

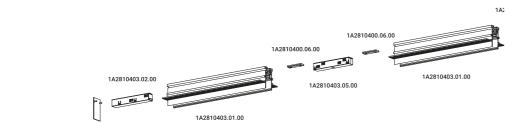



DOT FRAMELESS

13W 48V DC 2700K / 300

2700K / 3000K CRI 97

Driver not included

DALI

Matt White - 2700K - DALI Matt White - 3000K - DALI

Matt Black - 2700K - DALI

1A0090403.27.01

1A0090303.27.01

1A0090303.30.01

Matt Black - 3000K - DALI 1A0090403.30.01

FRAMELESS

/ 2016

/ 2016 FRAMELESS

Compulsory accessories

Installation kit



Plasterboard track 0.49"		Not included
Matt Black	48V DC - Max 15A - Lenght 78.74" - Cut-out 78.74" x 0.49"	1A2810403.01.00



Power connector			Not included
Matt Black	Output 48V - Max 15A	1A2810403.02.00	



End cap for power connector	Not included
Matt Black	1A2810403.03.00



End cap	Not included
Matt Black	1A2810400.04.00



Linear connector			Not included
Matt Black	Output 48V - Max 15A	1A2810403.05.00	







Clamp with M6 grippe

1A2810000.07.00



1A2810000.08.00	

Compulsory accessories

Installation kit



Plaster installation guard	Not included
Lenght 78.74"	1A2810000.09.00




Cutting tool		Not included
	1A2810000.10.00	

Other accessories




Lens				Not included
Beam - 14°	2700K - CRI 97 - 983lm	DOT FRAMELESS	1A3090000.00.00	
	3000K - CRI 97 - 1038lm			
Beam - 24°	2700K - CRI 97 - 943lm	DOT FRAMELESS	1A3100000.00.00	
	3000K - CRI 97 - 996lm			
Beam - 36°	2700K - CRI 97 - 955lm	DOT FRAMELESS	1A3110000.00.00	
	3000K - CRI 97 - 1005lm			
Beam - 50°	2700K - CRI 97 - 965lm	DOT FRAMELESS	1A3120000.00.00	
	3000K - CRI 97 - 1016lm			


Electrical power supply




Remote power supply kit - TRIAC	
Input 120V - 60Hz -	1A2810003.11.00
Output 48V - 150W - IP67 - DALI	



Remote power supply kit	Not included
Input 120V - 60Hz - Output 48V - 320W - IP67 - DALI	1A2810003.12.00



Driver LED		Not included
100-240V	48V/150W/IP67/1-10V	1Z1120250



Driver LED		Not included
100-240V	48V/320W/IP67/1-10V	1Z1120380


416 417

Not included

OUTDOOR



Maurizio Mancini / 2012





BELLADINOTTE Maurizio Mancini / 2012

Standard - 2700K


Standard - 3000K

Floor-Outdoor / Indirect / Outdoor

Material Metal

Finish .00 Standard

Note Adjustable luminaire with mirror top - Green back side - Black cable (196.85").



BELLADINOTTE

2x4,2W

24V DC

2700K - 262lm / 3000K - 282lm

CRI >90

Driver not included

CUL) US IP67

Compulsory accessories

Electrical power supply



Driver LED		Not included
110-240V	24V/25W/IP67/ON/OFF	171120620


1A3560003.27.20

1A3560003.30.20





Daniele Sprega / 2014



BUBKA Daniele Sprega / 2014

Outdoor-Floor / Direct / Outdoor

AISI 316L Stainless Steel - Metal Material

Finish .00 Standard

Adjustable luminaire with AISI 316L Stainless steel stem - Black cable (275,59"). Note

5.90"

BUBKA

8,4W

Max 700mA DC

2700K - 639lm / 3000K - 639lm

CRI >90

Driver not included

CULUS IP65

Standard - 2700K

Standard - 3000K

1A3600003.27.20 1A3600003.30.20

Compulsory accessories

Electrical power supply



Driver LED		Not include	
100-240V	700mA/21W/IP67/ON/OFF	1Z1120100	


Optional accessories

Installation kit



Not included
1A3620000.00.00

Lighting modules




Additional LED head		Not i	Not included
Matt Black	Max 700mA DC - 8,4W - 2700K - 350Im - CRI>90	1A3610403.27.20	
	Max 700mA DC - 8,4W - 3000K - 350Im - CRI>90	1A3610403.30.20	





Daniele Sprega / 2021



BUBKA BOLLARD

Daniele Sprega / 2021

Outdoor-Floor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal

Finish .00 Standard

Note Adjustable luminaire with AISI 316L Stainless steel stem - Black cable (354.33").

5.90"

BUBKA BOLLARD

8,4W

Max 700mA DC

2700K - 350lm / 3000K - 350lm

....

Standard - 2700K Standard - 3000K 1A1440003.27.20 1A1440003.30.20

CRI >90

Driver not included



Compulsory accessories

Electrical power supply



Driver LED		Not inclu	ıded
100-240V	350mA/16W/IP67/0N/0FF	1Z1120130	


Optional accessories

Installation kit




Not included
1A3620000.00.00

Lighting modules



Additional LED he	ad		Not included
Matt Black	Max 700mA DC - 8,4W - 2700K - 350lm - CRI>90	1A3610403.27.20	
	Max 700mA DC - 8,4W - 3000K - 350lm - CRI>90	1A3610403.30.20	






GRILLO Daniele Sprega / 2012

Floor-Outdoor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal

Finish .04 Matt Black

Note Adjustable luminaire with AISI 316L Stainless steel stem.



GRILLO

4,2W 24V DC 3000K - 282lm CRI >90

Driver not included

Matt Black - 3000K

1A3570403.30.20

CULUS IP67

Compulsory accessories

Electrical power supply



Driver LED		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories

Installation kit




Additional stem 39.37	n .		Not included
Standard	AISI 316L Stainless steel	1A3590000.00.00	

Lighting modules



Additional LED h	ead	Not inclu
Matt Black	24V DC - 4,2W - 2700K - 262lm - CRI>90	1A3580403.27.20
	24V DC - 4,2W - 3000K - 282lm - CRI>90	1A3580403.30.20





IMU Omar Carraglia / 2013

Standard - 3000K

Wall-Outdoor / Direct / Outdoor

Material Metal

Finish .00 Standard

Note Matt black luminaire with matt red top.



IMU

5,5W

Max 350mA DC

3000K - 306lm

CRI >80

Driver not included

IP65

Compulsory accessories


Electrical power supply



Driver LED			Not included
100-240V	350mA/16W/IP67/0N/0FF	1Z1120130	

1A3550003.30.20








Floor-Outdoor / Diffuse / Outdoor

Material Metal - Methacrylate - Polycarbonate

Finish .03 Matt White

Note Luminaire with black cable (196.85") - Plug not included.



LENTA

Max 18W - E26 120V - 60Hz Bulb not included ON/OFF IP65

Matt White - ON/OFF

1A3630303.00.00


Optional accessories

Other accessories



Power shell	Not included
IP65	1A2950000.00.00





Davide Groppi - Beppe Merlano / 2022

The idea is to bring light wherever you like.
A simple project: a cable and a LED.
Indoor version available.



NEURO OUTDOOR


Davide Groppi - Beppe Merlano / 2022

Suspension-Outdoor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal

Finish .04 Matt Black .32 Copper Oxide

Luminaire with black cable (393.70"). Note



NEURO OUTDOOR

4,2W 24V DC

CRI >90

Driver not included

CULUS IP65

1A4030403.27.20 Matt Black - 2700K Matt Black - 3000K 1A4030403.30.20 2700K - 262lm / 3000K - 282lm Copper Oxide - 2700K

1A4033203.27.20 Copper Oxide - 3000K 1A4033203.30.20


Compulsory accessories

Electrical power supply



Driver LED		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620





NUIT Maurici Ginés / 2023

Outdoor-Wall / Diffuse / Indoor-Outdoor

Material Metal

Finish .03 Matt White .27 Gravity Black .38 Blasted Inox

Note Semi-recessed luminaire - For installation: minimum space for mounting 2.16".



NUIT	Matt White - 2700K	1A1320303.27.20
1W	Matt White - 3000K	1A1320303.30.20
24V DC	Gravity Black - 2700K	1A1322703.27.20
2700K - 45lm / 3000K - 50lm	Gravity Black - 3000K	1A1322703.30.20
CRI 90	Blasted Inox - 2700K	1A1323803.27.20
Driver not included	Blasted Inox - 3000K	1A1323803.30.20

Compulsory accessories

Installation kit



Concrete box	Not included
	1A4460000.00.00



Plasterboard frame 0.49"		Not included	
Matt White	Cut-out 3.93" x 3.93" - Minimum space for mounting 4.72"	1A4470300.00.00	

Electrical power supply




Driver LED		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories

Installation kit



Standard 1A5030000 00 00	Adapter plasterboard frame 0.98"	Not included
	Standard	1A5030000.00.00

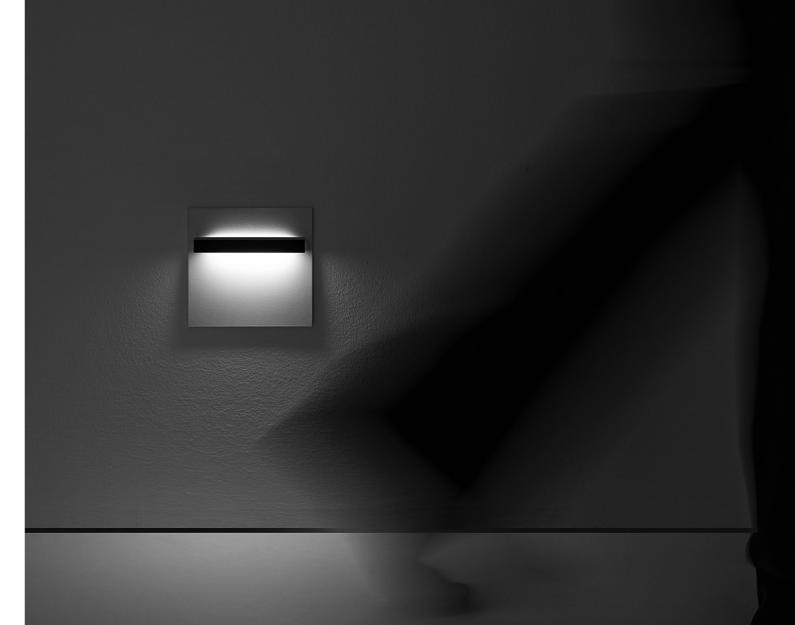



Davide Groppi - Giorgio Rava / 2020

From the Latin"origo", start, birth, source.
It appears like a bud emerging from the ground and soaring upwards towards the sky, a stem that becomes increasingly thinner.
Mysterious, enigmatic but comfortable, it combines the fascination of the unknown with the pleasure of a sophisticated and elegant ambient light.
Origine sculpts and enhances every environment with its indirect light,

sculpts and enhances every environment with its indirect light, which is intentionally non-invasive, graphic and fascinating. Indoor version available.

> AZ Award 2021 and People's Choice Archiproducts Design Award 2020

ORIGINE OUTDOOR

Davide Groppi - Giorgio Rava / 2020

Outdoor-Floor / Indirect / Outdoor

Fiberglass - Metal Material .04 Matt Black Finish

Luminaire with black cable (196.85"). Note



ORIGINE OUTDOOR

35W 24V DC

2700K - 2872lm / 3000K - 2930lm

CRI >80

Driver not included

CULUS IP65

1A2480403.27.20 Matt Black - 2700K Matt Black - 3000K 1A2480403.30.20

Compulsory accessories

Electrical power supply



Driver LED		Not included
100-240V	24V/60W/IP67/1-10V	171120260





OUT 44

/ 2021

A tool to light.

The luminaire is pure form, a simple container for the light source.

Light is incorporated into the space, becoming an architectural element.

OUT 44 / 2021

Matt Black - 3000K

Matt Black - 3000K

Recessed-Outdoor / Direct / Outdoor

Material Metal

.04 Matt Black Finish

Note Adjustable luminaire.



OUT 44 - 14°

2W

Max 500mA DC

3000K - 133lm

Beam 14° CRI >90

Driver not included

ontertek P65 Certificated 2EO-OLU 2 Flexalighting Product



OUT 44 - 23°

2W

Max 500mA DC

3000K - 133lm

Beam 23°

CRI >90

Driver not included



ontertek P65 Certificated 2EO-OLU 2 Flexalighting Product

Compulsory accessories

Electrical power supply



Driver LED			Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH - 1-10V	1Z0240870.500	

1A1600403.30.20

1A1610403.30.20

OUT 44 / 2021

Optional accessories


Installation kit



Wall back plate	Not include	ed
Matt Black	1A1630403.00.00	
Matt White	1A1630303.00.00	



Earth spike	Not included
Standard	1A1620000.00



A tool to light.

The luminaire is pure form, a simple container for the light source.

Light is incorporated into the space, becoming an architectural element.

OUT 58 / 2021

Stainless Steel - 3000K

Recessed-Outdoor / Direct / Outdoor

Material

Finish .10 Stainless Steel

Glass - Metal

1.45"

OUT 58 - 39°

7W

24V DC

3000K - 546lm

Beam 39°

CRI >90

Driver not included

contented of P67 Certificated 7AO-BREE Flexalighting Product

Compulsory accessories

Installation kit



Installation box Not included Cut-out 2.16" -Minimum space for mounting 4.33" 1A1560000.00.00

1A1551003.30.20

Electrical power supply




Driver LED		Not	included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620	





/ 2021

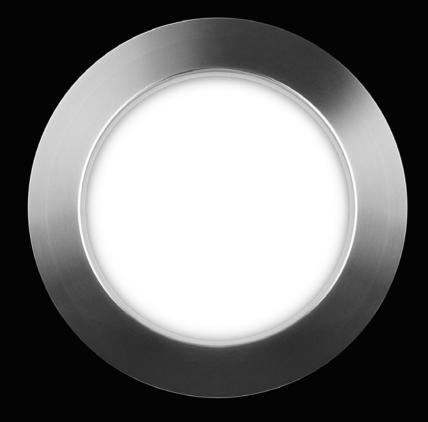

A tool to light.

The luminaire is pure form, a simple container for the light source.

Light is incorporated into the space, becoming an architectural element.

OUT 100 / 2021

Stainless Steel - 3000K

Stainless Steel - 3000K

Recessed-Outdoor / Direct / Outdoor

Material

Finish .10 Stainless Steel

Glass - Metal

OUT 100 - 15°

20W

Max 500mA DC

3000K - 2058lm

Beam 15°

CRI >90

Driver not included



Certificated 20AO-DESERT 20 P67

Flexalighting Product



OUT 100 - 23°

20W

Max 500mA DC

3000K - 2058lm

Beam 23°

CRI >90

Driver not included



Certificated 20AO-DESERT 20 **IP67**Flexalighting Product

Compulsory accessories

Installation kit



Installation box	Not included
Cut-out Ø 3.70" -	1A1590000.00
Minimum space for mounting 6.30"	

1A1571003.30.20

1A1581003.30.20

OUT 100

Compulsory accessories

Electrical power supply

/ 2021



Driver LED			Not included
220-240V(110-127V)	500mA/24W(15W)/IP68/ON/OFF	170241170	



Enzo Calabrese - Davide Groppi / 2011

A special project, an authentic ready-made.

Obtained from a fishing flexible rod, it is a delicate and elegant sign, which brings to mind the subtle branches of a willow tree or bamboo canes floating on a light breeze.

Sampei is an unexpected gift, it is the magic of looking up, using light as a hook, and being amazed by so much weightlessness.

Indoor version available.

SAMPEI 440 OUTDOOR


Enzo Calabrese - Davide Groppi / 2011

Floor-Outdoor / Direct / Outdoor

Material Fiberglass - Metal

.03 Matt White Finish .04 Matt Black

Adjustable luminaire with black cable (216.53"). Note



SAMPEI 440 OUTDOOR

CULUS IP65

8,4W Max 700mA DC 2700K - 639lm / 3000K - 639lm CRI >90

Driver not included

1A3770303.27.20 Matt White - 2700K Matt White - 3000K 1A3770303.30.20 Matt Black - 2700K 1A3770403.27.20 Matt Black - 3000K 1A3770403.30.20

Compulsory accessories

Electrical power supply




Driver LED		Not included	
100-240V	700mA/21W/IP67/0N/0FF	171120100	



SHOJI OUTDOOR

Davide Groppi - Paola Lenti / 2013






SHOJI OUTDOOR Davide Groppi - Paola Lenti / 2013

Floor-Outdoor / Diffuse / Outdoor

Material Metal - PBT - Polycarbonate

Finish .00 Standard

Note Luminaire with black cable (196.85") - Plug not included.



SHOJI

Max 18W - E26 120V - 60Hz Bulb not included ON/OFF IP65

Standard - ON/OFF

1A3640003.00.00

Optional accessories

Other accessories



Power shell	Not included
IP65	1A2950000.00.00



DG111 LED MODULES / MODULI LED DG111

	Current	Power	Beam Angle	CCT	Lumens	CRI	Energy Efficiency	Dimmable	Code
	350mA DC	11,7W	15°	2700K	1068lm	90	F	Х	1A4700003.27.20
	350mA DC	11,7W	15°	3000K	1091lm	90	F	Χ	1A4700003.30.20
	350mA DC	11,7W	22°	2700K	1508lm	90	F	Χ	1A3890003.27.20
433"	350mA DC	11,7W	22°	3000K	1578lm	90	F	X	1A3890003.30.20
	350mA DC	11,7W	36°	2700K	1266lm	90	F	X	1A3900003.27.20
	350mA DC	11,7W	36°	3000K	1323lm	90	F	X	1A3900003.30.20
	400mA DC	13,5W	15°	2700K	1318lm	90	F	Χ	1A4700003.27.20
	400mA DC	13,5W	15°	3000K	1345lm	90	F	Χ	1A4700003.30.20
(a) : is	400mA DC	13,5W	22°	2700K	1487lm	90	F	Χ	1A3890003.27.20
433"	400mA DC	13,5W	22°	3000K	1556lm	90	F	X	1A3890003.30.20
	400mA DC	13,5W	36°	2700K	1446lm	90	F	Х	1A3900003.27.20
	400mA DC	13,5W	36°	3000K	1512lm	90	F	X	1A3900003.30.20

DRIVER

	Power	Input	Output	Dimming	Protection	Code
1,02	50W	100-240V	24V	ON/OFF	IP20	1Z1120490
1260°	80W	100-240V	24V	ON/OFF	IP20	1Z1120440
7.85° . 1.80°	60W	120-277V	24V	TRIAC - 1-10V	IP20	1Z2020040
3.24	96W	120-277V	24V	TRIAC - 1-10V	IP20	1Z2020060
. i.g	16W(15W)	220-240V(100-127V)	24V	DALI	IP20	1Z0241180.24
· · · · · · · · · · · · · · · · · · ·	20W(15W)	220-240V(100-127V)	24V	PUSH	IP20	1Z0240870.24
	22W(12W)	220-240V(100-127V)	24V	ON/OFF	IP20	1Z0240410
	17W(15W)	220-240V(100-127V)	350mA	DALI	IP20	1Z0241180.350
	18W(15W)	220-240V(100-127V)	350mA	PUSH - 1-10V	IP20	1Z0240870.350
277. A88	18W(18W)	220-240V(100-127V)	350mA	DALI - PUSH - 1-10V	IP20	1Z0240530.350
\$ 480. 6.75°	90W	100-240V	48V	1-10V	IP20	1Z1120290

DRIVER

	Power	Input	Output	Dimming	Protection	Code
	30W	120-277V	500mA	TRIAC - 1-10V	IP20	1Z2020050.500
	20W(15W)	220-240V(100-127V)	500mA	DALI	IP20	1Z0241180.500
	20W(15W)	220-240V(100-127V)	500mA	PUSH - 1-10V	IP20	1Z0240870.500
3.77. A88	26,5W(26,5W)	220-240V(100-127V)	500mA	DALI - PUSH - 1-10V	IP20	1Z0240530.500
3.77. A98	50W(40W)	220-240V(100-127V)	700mA	DALI	IP20	1Z0241140.700
263. B9T	150W	100-240V	24V	1-10V	IP67	1Z1120500
- 6.15 - 1.25 - 1.25	60W	100-240V	24V	1-10V	IP67	1Z1120260
500 8 60	96W	100-240V	24V	1-10V	IP67	1Z1120540
, 22. P82,	25W	110-240V	24V	ON/OFF	IP67	1Z1120620
₹000 · V. V	16W	100-240V	350mA	ON/OFF	IP67	1Z1120130
· · · · · · · · · · · · · · · · · · ·	150W	100-240V	48V	1-10V	IP67	1Z1120250

	Power	Input	Output	Dimming	Protection	Code
256.	320W	100-240V	48V	1-10V	IP67	1Z1120380
· · · · · · · · · · · · · · · · · · ·	60W	100-240V	48V	ON/OFF	IP67	1Z1120640
	21W	100-240V	700mA	ON/OFF	IP67	1Z1120100
: iš	24W(15W)	220-240V(110-127V)	500mA	ON/OFF	IP68	1Z0241170


COMMON ACCESSORIES


	Size		Finish	Code		
Plasterboard trapdoors						
	7.87" x 7.87"	8.07" x 8.07"	Standard	1A3780000.00.00		
	15.74" x 15.74"	16.34" x 16.34"	Standard	1A3790000.00.00		
Clamp						
©	0.1.0710.701		Matt White	1A3270300.00.00		
	Ø 1.97" x 0.79"		Matt Black	1A3270400.00.00		

SUSPENSION FIXING KIT

Ceiling fixing kit








Fixing kit for 0.49" plasterboard

Magnetic fixing





Back plate for masonry ceilings

Magnetic fixing

ß		þ
	Ŀ	
٠	62	,

Model	Use	Product reference	Finish	Code
Recessed fixing kit.01		REFLEX S 1 SHANGHAI 1 SHANGHAI 2	Matt White	1X0000300.01.00
	For suspension cables	SIANOHAI 2 SIMBIOSI SOTTILE 2 SOTTILE 2 DE	Matt Black	1X0000400.01.00
Recessed fixing kit.02	5 1 1 11	MAGIA	Matt White	1X0000300.02.00
	For elettrical cables		Matt Black	1X0000400.02.00
Recessed fixing kit.03	Farancia adda	FOSBURY	Matt White	1X0000300.03.00
	For suspension cables	MASAI 1 MASAI 2	Matt Black	1X0000400.03.00
Recessed fixing kit.04	For elettrical cables	ASINTOTO REFLEX S 2	Matt White	1X0000300.04.00
	For elettrical cables	SOTTILE 2 SOTTILE 2 DE	Matt Black	1X0000400.04.00
Recessed fixing kit.05	For elettrical cables	LOUIS XIV 2	Matt White	1X0000300.05.00
	For elettrical cables	SOTTOSOPRA 2	Matt Black	1X0000400.05.00

	Model	Use	Product reference	Finish	Code
. 77	Ceiling fixing kit.01	For suspension cables	SHANGHAI 2 SIMBIOSI	Matt White	1X0010300.01.00
				Matt Black	1X0010400.01.00
	Ceiling	For elettrical cables	MAGIA	Matt White	1X0010300.02.00
	fixing kit.02			Matt Black	1X0010400.02.00
	Ceiling fixing kit.03	For suspension cables	MASAI 1	Matt White	1X0010300.03.00
				Matt Black	1X0010400.03.00
	Ceiling fixing kit.04	For elettrical cables	REFLEX S 2 SOTTILE 2	Matt White	1X0010300.04.00
				Matt Black	1X0010400.04.00
. 120 .					
=	Back plate	For masonry ceilings		Matt White	1X0050300.01.00

CERTIFICATIONS

cETLus certification / cULus certification / Title 24 Compliant

ORIGINE 490

ANIMA MOON T
BELLADINOTTE NEURO

BINARIO TRIFASE NEURO OUTDOOR

 BUBKA
 NULLA

 BUBKA BOLLARD
 NULLA 18

 BUCO 58
 NULLA 25

 CATHODE 1
 NULLA 25 T24

 DOT P 51
 OHM SPOT

 DOT PL 51
 ORIGINE 290

 FLASH 6
 ORIGINE 390

GRILLO ORIGINE OUTDOOR

 INFINITO 6
 OUT 44

 INFINITO 12
 OUT 58

 MASAI 1
 OUT 100

 MINI PL 51
 OZEN

FLASH 12

MIRA OZEN VETRO

 MIRA R
 PIÙ

 MIRA SWITCH
 QUAD

 MISS 1
 SAMPEI 230

 MISS 2
 SAMPEI 260

 MOON 60
 SAMPEI 290

 MOON 60 DE
 SAMPEI 440

MOON 80 SAMPEI 440 OUTDOOR

MOON 120 SIMBIOSI MOON 200 TOAST

INFORMATION

Davide Groppi srl is constantly revising its products in order to offer the best and latest technology available.

This is why its catalogues and technical notes are in constant evolution.

You can find the latest information and technical updates on our website www.davidegroppi.com

davidegroppi.com

Davide Groppi srl Via Belizzi 20 / 22 29122 Piacenza - Italia Ph. +39.0523.571590 info@davidegroppi.com

Davide Groppi srl @ 2024 Company with sole shareholder under the direction and coordination of IDB spa