


N O V E L T I E S

davide groppi



VERA	3
UMASI / UMASI S	7
CALMA T	13
CALMA S / CALMA UP&DOWN	17
MISS 25	23
CARROPONTE	27
D13 PL / D13 S	35
IPE BOLLARD / IPE P	39
OcchiOlinO	45

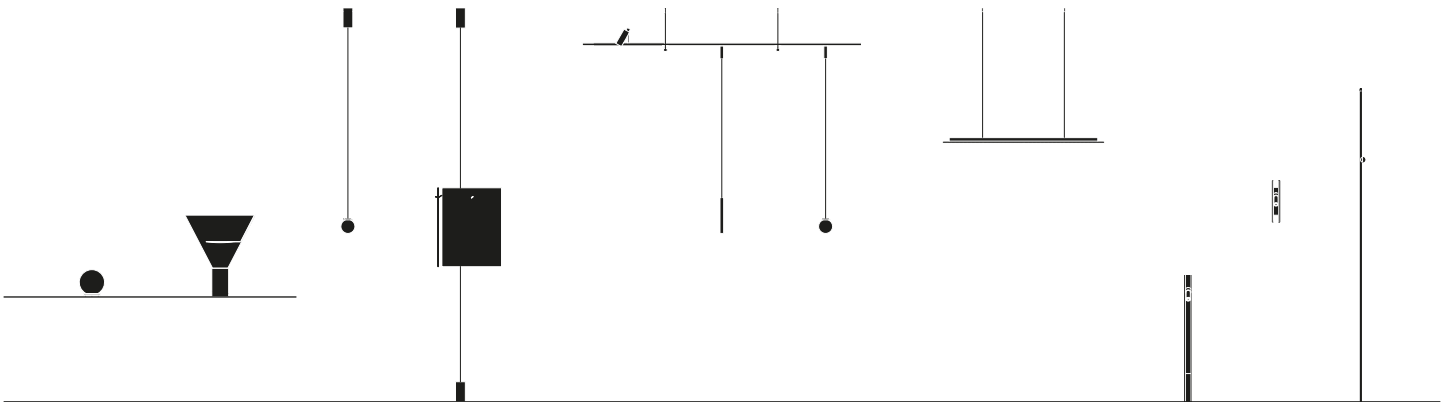

DISCOVER MORE ABOUT THE NOVELTIES 2026 ONLINE



Table luminaire with diffuse light for indoor use.

An object that furnishes with light, a name that tells of an illusion. VERA is a table lamp in essential, silent and transparent glass. When switched on, a bulb appears inside, a tiny heart of light suspended in the void. When switched off, the bulb disappears, leaving an unexpected, clear glass.

The base is in matt black, matt bronze or natural anodised aluminium. The diffuser is in borosilicate glass.

The light source is LED with integrated module. The electric cable is matt black. The luminaire is switched on and off and controlled by a button fitted into the base. The power supply is plug-in and is included.

Apparecchio di illuminazione da tavolo, a luce diffusa, per interni.

Un oggetto per arredare con la luce, un nome per raccontare un'illusione. VERA è una lampada da tavolo in vetro trasparente, essenziale e silenziosa. Quando si accende, al suo interno appare la lampadina, piccolo cuore di luce sospeso nel vuoto. Al suo spegnimento, la lampadina scompare, lasciando il vetro limpido e inatteso.

La base è in alluminio anodizzato nero opaco, bronzo opaco o naturale. Il diffusore è in vetro borosilicato.

La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco. L'accensione, lo spegnimento e la regolazione avvengono mediante un pulsante posizionato nello spessore della base. L'alimentatore è a spina ed è incluso.

Finish


.04 Matt Black
.46 Matt Bronze

.44 Natural Aluminium


Certification

Luminaire US/CAN certification pending. CHINA certification pending.

Apparecchio illuminante con certificazione US/CAN in corso. Certificazione CHINA in corso.



VERA

21W
 100-240V - 50/60Hz
 2700K - 1050lm / 3000K - 1150lm
 CRI >90
 Driver with plug included
 Dimmer on board
 CE  IP20

Matt Black - 2700K - Dimmer on board	1A6550400.27.06
Matt Black - 3000K - Dimmer on board	1A6550400.30.06
Natural Aluminium - 2700K - Dimmer on board	1A6554400.27.06
Natural Aluminium - 3000K - Dimmer on board	1A6554400.30.06
Matt Bronze - 2700K - Dimmer on board	1A6554600.27.06
Matt Bronze - 3000K - Dimmer on board	1A6554600.30.06





Floor / suspension luminaire with diffuse light for indoor use.

The magic of the shade.

A light that waits for us, making us feel at home, taking us back to a time when everything seemed easier.

The lamp is switched on without intruding, like a light breathe in the space.

The light is born inside, but never shows itself directly.

It crosses three paper shields, becoming soft.

Shadows dissolve, outlines become smooth, everything seems to slow down.

In UMASI, the shade runs on the wire, from the ceiling to the floor.

Apparecchio di illuminazione da terra / sospensione, a luce diffusa, per interni.

La magia del paralume.

Una luce ci aspetta, ci fa sentire a casa, ci riporta a un tempo in cui tutto sembrava più semplice.

La lampada si accende senza imporsi, come un respiro leggero nello spazio.

La luce nasce al suo interno, ma non si mostra mai direttamente.

Attraversa tre schermi di carta e diventa morbida.

Le ombre si dissolvono, i contorni si fanno gentili, tutto sembra rallentare.

In UMASI, il paralume scorre sul filo, dal soffitto al pavimento.

In UMASI, the rose and base are in sanded matt black anodised aluminium.

In UMASI S, the roses available are in textured matt black or matt white painted steel.

The shade is in PETG, coated inside and outside with paper.

The light source is LED with integrated module.

In UMASI, the vertical electric cable is coaxial and matt black.

The electric floor cable is matt black. The switch / dimmer is fitted on the cable.

The power supply is plug-in and is included.

In UMASI S, the electric cable is in matt white or matt black, depending on the luminaire finish.

A range of roses and power supplies are available.

In UMASI, il rosone e la base sono in alluminio anodizzato nero opaco sabbato.

In UMASI S, i rosoni disponibili sono in acciaio verniciati bianco opaco o nero opaco texturizzato.

Il paralume è in PETG rivestito, internamente ed esternamente, in carta.

La sorgente luminosa è a LED e a modulo integrato.

In UMASI, il cavo elettrico verticale è coassiale e di colore nero opaco.

Il cavo elettrico a terra è di colore nero opaco.

L'interruttore / dimmer è lungo il cavo.


L'alimentatore è a spina ed è incluso.

In UMASI S, il cavo elettrico è di colore bianco opaco o nero opaco in funzione della finitura.

Sono disponibili vari rosoni e sistemi di alimentazione.


Finish .00 Standard

Certification Luminaire US/CAN certification pending. CHINA certification pending.
Apparecchio illuminante con certificazione US/CAN in corso. Certificazione CHINA in corso.

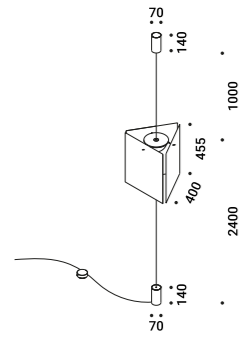

UMASI 40
 26W
 100-240V - 50/60Hz
 2700K - 2105lm / 3000K - 2138lm
 CRI >90
 Driver with plug included
 Dimmer on board
 CE IP20

Standard - 2700K - Dimmer on board	1A6560000.27.06
Standard - 3000K - Dimmer on board	1A6560000.30.06

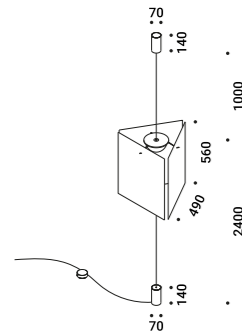

UMASI 50
 26W
 100-240V - 50/60Hz
 2700K - 2204lm / 3000K - 2237lm
 CRI >90
 Driver with plug included
 Dimmer on board
 CE IP20


Standard - 2700K - Dimmer on board	1A6910000.27.06
Standard - 3000K - Dimmer on board	1A6910000.30.06

Optional accessories / Accessori opzionali


Other accessories / Altri accessori




Black sheet / Foglio nero			Not included
Matt Black	1 Piece	UMASI 40 / UMASI S 40	1X0300400.03.00




Black sheet / Foglio nero			Not included
Matt Black	1 Piece	UMASI 50 / UMASI S 50	1X0300400.04.00

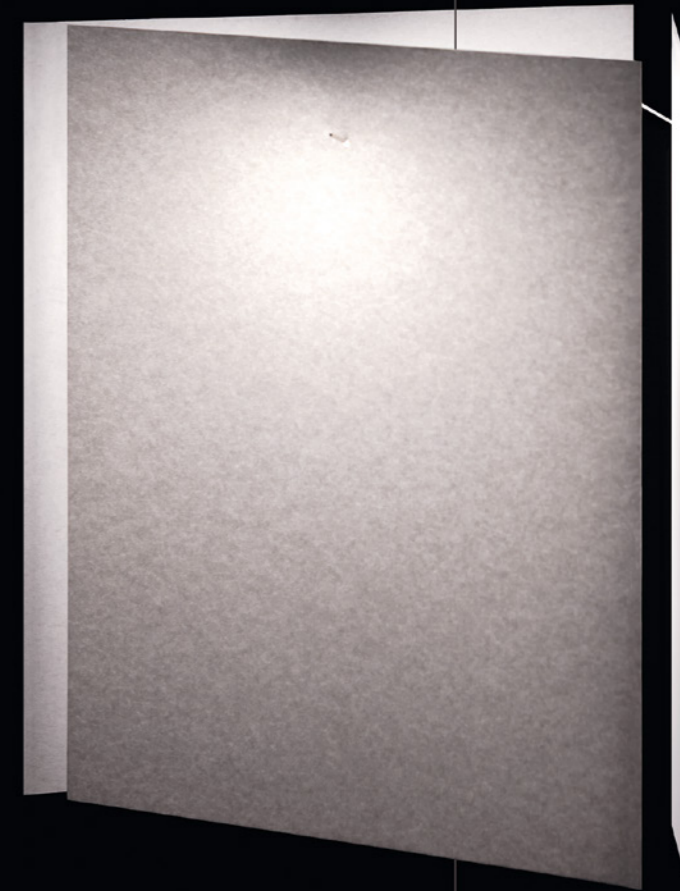

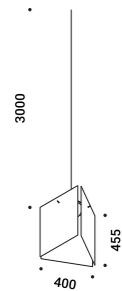

UMASI S 40
 24W
 Max 700mA DC
 2700K - 2105lm / 3000K - 2138lm
 CRI >90
 Driver not included
 CE IP20

Standard - 2700K	1A6940000.27.20
Standard - 3000K	1A6940000.30.20

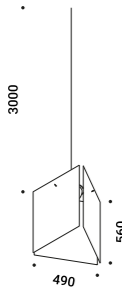


UMASI S 50
 24W
 Max 700mA DC
 2700K - 2105lm / 3000K - 2138lm
 CRI >90
 Driver not included
 CE IP20


Standard - 2700K	1A6950000.27.20
Standard - 3000K	1A6950000.30.20

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione



Ceiling rose with driver / Rosone con alimentatore		Not included
Matt White	Input 110-240V - 50/60Hz Output 700mA DC - Max 24W IP20 - DALI - PUSH - 1-10V	1X0300300.01.07
Matt Black	Input 110-240V - 50/60Hz Output 700mA DC - Max 24W IP20 - DALI - PUSH - 1-10V	1X0300400.01.07
Matt White	Input 220-240V - 50/60Hz Output 700mA DC - Max 24W IP20 - TRIAC/IGBT	1X0300300.01.02
Matt Black	Input 220-240V - 50/60Hz Output 700mA DC - Max 24W IP20 - TRIAC/IGBT	1X0300400.01.02




Ceiling rose without driver / Rosone senza alimentatore		Not included
Matt White	For electrical cables - 1 Piece	1X0010300.06.00
Matt Black	For electrical cables - 1 Piece	1X0010400.06.00

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione




Recessed rose without driver / Rosone da incasso senza alimentatore		Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.06.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000400.06.00




Recessed rose without driver / Rosone da incasso senza alimentatore		Not included
Matt White	Plasterboard cut-out 85x97 mm Minimum space for mounting 120 mm For 12,5 mm plasterboard	1X0230300.04.00
Matt Black	Plasterboard cut-out 85x97 mm Minimum space for mounting 120 mm For 12,5 mm plasterboard	1X0230400.04.00

Drivers / Alimentatori



Driver / Alimentatore		Not included
220-240V(110-127V)	700mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.700




Driver / Alimentatore		Not included
220-240V	700mA/28W/IP20/TRIAC/IGBT	1Z0241580.700

Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione



Decentralization kit / Kit decentratore		Not included
		1A0360000.00.00



Kit ceiling rose and decentralizer / Kit rosone e decentratore		Not included
Matt White	Transparent cable 3 m included	1A0770300.00.00
Matt Black	Transparent cable 3 m included	1A0770400.00.00

Table luminaire with diffuse light for indoor use.

The soft light of opaline glass. The elegance of a luminous sphere on a support surface.

The base is in aluminium and comes in a range of painted or galvanised finishes.

The opaline ball is in triple-layer blown glass.

The luminaire is also available in the wall and suspension version.

It requires an E27 LED bulb, which is not included but is available as an accessory. The electric cable is in matt white or matt black, depending on the luminaire finish.

The switch / dimmer is fitted on the cable.

Apparecchio di illuminazione da tavolo, a luce diffusa, per interni.

La luce morbida del vetro opalino. L'eleganza di una sfera luminosa sul piano di appoggio.

La base è in alluminio in varie finiture verniciate o galvanizzate.

Il vetro sferico è opalino e in triplo strato soffiato.

L'apparecchio è disponibile anche in versione da parete e a sospensione.

La lampadina prevista è a LED, con attacco E27, e non è inclusa, ma disponibile come accessorio.

Il cavo elettrico è di colore bianco opaco o nero opaco in funzione della finitura. L'interruttore / dimmer è lungo il cavo.



Finish

.03 Matt White


.04 Matt Black

.19 Polished Gold

Certification

Luminaire available for US/CAN market. CHINA certification pending.


Apparecchio illuminante disponibile per mercato US/CAN. Certificazione CHINA in corso.



CALMA T

Max 15W - E27
 100-240V - 50/60Hz
 ON/OFF
 Bulb not included
 CE □ IP20

Matt White - ON/OFF	1A6880300.00.00
Matt Black - ON/OFF	1A6880400.00.00
Polished Gold - ON/OFF	1A6881900.00.00



CALMA T

Max 15W - E27
 100-240V - 50/60Hz
 Dimmer on board
 Bulb not included
 CE □ IP20

Matt White - Dimmer on board	1A6880300.00.06
Matt Black - Dimmer on board	1A6880400.00.06
Polished Gold - Dimmer on board	1A6881900.00.06

Compulsory accessories / Accessori obbligatori

Bulbs / Lampadine



LED - E27 - A60		Not included
	220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790





Suspension luminaire with diffuse light for indoor use.

The soft light of opaline glass.

In CALMA UP&DOWN, a small luminous sphere is moved up and down from the ceiling by a sophisticated control system. In CALMA S, the available roses are in textured matt black or matt white painted steel. In CALMA UP&DOWN, the rose is in sanded black anodised aluminium. The glass support comes in a range of painted or galvanised finishes. The opaline ball is in triple-layer blown glass. The luminaire is also available in the wall and table version.

The light source is LED with integrated module. In CALMA S, the electric cable is coaxial and in matt white or matt black, depending on the luminaire finish. A range of roses and power supplies are available. In CALMA UP&DOWN, the electric cable is coaxial and matt black and can be adjusted using an automatic winder.

Apparecchio di illuminazione a sospensione, a luce diffusa, per interni.

La luce morbida del vetro opalino.

In CALMA UP&DOWN, una piccola sfera luminosa sale e scende dal soffitto grazie ad un sofisticato sistema di regolazione. In CALMA S, i rosoni disponibili sono in acciaio verniciati bianco opaco o nero opaco texturizzato. In CALMA UP&DOWN, il rosone è in alluminio anodizzato nero opaco sabbiato. Il supporto del vetro è in ottone in varie finiture verniciate o galvanizzate. Il vetro sferico è opalino e in triplo strato soffiato. L'apparecchio è disponibile anche in versione da parete e da tavolo.

La sorgente luminosa è a LED e a modulo integrato. In CALMA S, il cavo elettrico è coassiale e di colore bianco opaco o nero opaco in funzione della finitura. Sono disponibili vari rosoni e sistemi di alimentazione. In CALMA UP&DOWN, il cavo elettrico è coassiale e di colore nero opaco e può essere regolato tramite un avvolgitore automatico.

Finish	.03 Matt White	(White cable)	.04 Matt Black	(White cable)
	.19 Polished Gold	(Black cable)	.26 Total Black	(Black cable)
	.45 Matt Nickel	(Black cable)		

Certification

Luminaire available for US/CAN market. Available for CHINA market.

Apparecchio illuminante disponibile per mercato US/CAN. Disponibile per mercato CHINA.




CALMA S

4W
 Max 350mA DC
 2700K - 150lm / 3000K - 160lm
 CRI >90
 Driver not included
 CE IP20

Matt White - 2700K	1A6890300.27.20
Matt White - 3000K	1A6890300.30.20
Matt Black - 2700K	1A6890400.27.20
Matt Black - 3000K	1A6890400.30.20
Polished Gold - 2700K	1A6891900.27.20
Polished Gold - 3000K	1A6891900.30.20
Total Black - 2700K	1A6892600.27.20
Total Black - 3000K	1A6892600.30.20
Matt Nickel - 2700K	1A6894500.27.20
Matt Nickel - 3000K	1A6894500.30.20

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione



Ceiling rose with driver / Rosone con alimentatore		Not included
Matt White	Input 110-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - DALI - PUSH - 1-10V	1X0290300.02.07
Matt Black	Input 110-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - DALI - PUSH - 1-10V	1X0290400.02.07
Matt White	Input 220-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - TRIAC/IGBT	1X0290300.02.02
Matt Black	Input 220-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - TRIAC/IGBT	1X0290400.02.02




Ceiling rose without driver / Rosone senza alimentatore		Not included
Matt White	For electrical cables - 1 Piece	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00




Recessed rose without driver / Rosone da incasso senza alimentatore		Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000400.04.00

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori




Driver / Alimentatore		Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	1Z0240850.350




Driver / Alimentatore		Not included
220-240V(110-127V)	350mA/18,9W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.350

Optional accessories / Accessori opzionali


Suspension kits / Kit di sospensione



Decentralization kit / Kit decentratore		Not included
		1A0360000.00.00



Kit ceiling rose and decentralizer / Kit rosone e decentratore		Not included
Matt White	Transparent cable 3 m included	1A0770300.00.00
Matt Black	Transparent cable 3 m included	1A0770400.00.00




CALMA UP&DOWN 1

Ceiling driver version
5W
220-240V - 50/60Hz
2700K - 150lm / 3000K - 160lm
CRI >90
Driver integrated
TRIAC/IGBT

CE IP20

Polished Gold - 2700K - TRIAC/IGBT	1A7051900.27.02
Polished Gold - 3000K - TRIAC/IGBT	1A7051900.30.02
Total Black - 2700K - TRIAC/IGBT	1A7052600.27.02
Total Black - 3000K - TRIAC/IGBT	1A7052600.30.02




CALMA UP&DOWN 1

Ceiling driver version
5W
220-240V - 50/60Hz
2700K - 150lm / 3000K - 160lm
CRI >90
Driver integrated
DALI - PUSH

CE IP20

Polished Gold - 2700K - DALI - PUSH	1A7051900.27.08
Polished Gold - 3000K - DALI - PUSH	1A7051900.30.08
Total Black - 2700K - DALI - PUSH	1A7052600.27.08
Total Black - 3000K - DALI - PUSH	1A7052600.30.08



CALMA UP&DOWN 2


Remote driver version
4W
Max 350mA DC
2700K - 150lm / 3000K - 160lm
CRI >90
Driver not included

CE IP20


Polished Gold - 2700K	1A7051900.27.20
Polished Gold - 3000K	1A7051900.30.20
Total Black - 2700K	1A7052600.27.20
Total Black - 3000K	1A7052600.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore				Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	CALMA UP&DOWN 2	1Z0240850.350	



Driver / Alimentatore				Not included
220-240V(110-127V)	350mA/18,9W(13,5W)/IP20/DALI - PUSH - 1-10V	CALMA UP&DOWN 2	1Z0241270.350	

Suspension luminaire with direct light for indoor use.

So slim and essential... A small tube that lights the table with wonder.

The available roses are in textured matt black or matt white painted steel.
The aluminium body comes in a range of painted or galvanised finishes.

The light source is LED with integrated module.
The electric cable is in matt white or matt black, depending on the luminaire finish.
A range of roses and power supplies are available.

Apparecchio di illuminazione a sospensione, a luce diretta, per interni.

Così esile ed essenziale... Un tubo sottile per fare una meravigliosa luce sul tavolo.

I rosoni disponibili sono in acciaio verniciati bianco opaco o nero opaco texturizzato.
Il corpo è in alluminio in varie finiture verniciate o galvanizzate.

La sorgente luminosa è a LED e a modulo integrato.
Il cavo elettrico è di colore bianco opaco o nero opaco in funzione della finitura.
Sono disponibili vari rosoni e sistemi di alimentazione.

Finish	.03 Matt White (White cable)	.04 Matt Black (White cable)
	.26 Total Black (Black cable)	.28 Polished Black Chrome (Black cable)
	.45 Matt Nickel (Black cable)	

Certification

Luminaire available for US/CAN market. Available for CHINA market.

Apparecchio illuminante disponibile per mercato US/CAN. Disponibile per mercato CHINA.




MISS 25

4W
 Max 350mA DC
 2700K - 150lm / 3000K - 160lm
 CRI >90
 Driver not included
 CE IP20

Matt White - 2700K	1A6960300.27.20
Matt White - 3000K	1A6960300.30.20
Matt Black - 2700K	1A6960400.27.20
Matt Black - 3000K	1A6960400.30.20
Total Black - 2700K	1A6962600.27.20
Total Black - 3000K	1A6962600.30.20
Polished Black Chrome - 2700K	1A6962800.27.20
Polished Black Chrome - 3000K	1A6962800.30.20
Matt Nickel - 2700K	1A6964500.27.20
Matt Nickel - 3000K	1A6964500.30.20

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione



Ceiling rose with driver / Rosone con alimentatore		Not included
Matt White	Input 110-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - DALI - PUSH - 1-10V	1X0290300.02.07
Matt Black	Input 110-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - DALI - PUSH - 1-10V	1X0290400.02.07
Matt White	Input 220-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - TRIAC/IGBT	1X0290300.02.02
Matt Black	Input 220-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - TRIAC/IGBT	1X0290400.02.02




Ceiling rose without driver / Rosone senza alimentatore		Not included
Matt White	For electrical cables - 1 Piece	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00




Recessed rose without driver / Rosone da incasso senza alimentatore		Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000400.04.00

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori




Driver / Alimentatore		Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	1Z0240850.350




Driver / Alimentatore		Not included
220-240V(110-127V)	350mA/18,9W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.350

Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione



Decentralization kit / Kit decentratore		Not included
		1A0360000.00.00



Kit ceiling rose and decentralizer / Kit rosone e decentratore		Not included
Matt White	Transparent cable 3 m included	1A0770300.00.00
Matt Black	Transparent cable 3 m included	1A0770400.00.00



Suspension lighting system with direct, indirect and diffuse light, for indoor use.

CARROPONTE is a lighting system that reinterprets an electrified track. Not a technical support, but a pattern that crosses through and designs the space. Positioned as required, the light runs along its path, following the needs of those who live in the space. With CARROPONTE, lighting becomes a gesture, a dynamic and precise sign placing light just where it is needed.

The track is in matt white, matt black painted aluminium or matt nickel and is available in 1 m, 2 m and 3 m lengths. Various luminaires with direct, indirect and diffuse light are available. The luminaires for this system have a matt black or matt white polycarbonate base.

The track is powered at 48V DC and is modular.

Sistema di illuminazione a sospensione, a luce diretta e indiretta e diffusa, per interni.

CARROPONTE è un sistema illuminante che reinterpreta il binario elettrificato. Non un supporto tecnico, ma un grafo che attraversa lo spazio e lo disegna. La luce scorre lungo il suo percorso, si posiziona con libertà, segue le esigenze di chi abita lo spazio. Con CARROPONTE, l'illuminazione diventa gesto, segno dinamico e preciso al servizio della luce esattamente dove la si desidera.


Il binario è in alluminio verniciato bianco opaco, nero opaco oppure nichel opaco ed è disponibile nelle misure di 1 m, 2 m e 3 m. Sono disponibili diversi corpi illuminanti a luce diretta, indiretta e diffusa. Gli apparecchi dedicati a questo sistema hanno la base in policarbonato nero opaco o bianco opaco.

Il binario funziona a 48V DC ed è componibile.

Finish	.03 Matt White	.04 Matt Black
	.45 Matt Nickel	
Certification	Luminaire US/CAN certification pending. CHINA certification pending. Apparecchio illuminante con certificazione US/CAN in corso. Certificazione CHINA in corso.	

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione




Track 1 m / Binario 1 m			Not included
Matt White		1A6870300.01.00	
Matt Black		1A6870400.01.00	
Matt Nickel		1A6874500.01.00	

Track 2 m / Binario 2 m			Not included
Matt White		1A6870300.02.00	
Matt Black		1A6870400.02.00	
Matt Nickel		1A6874500.02.00	

Track 3 m / Binario 3 m			Not included
Matt White		1A6870300.03.00	
Matt Black		1A6870400.03.00	
Matt Nickel		1A6874500.03.00	


Power connector / Elemento di alimentazione			Not included
Matt White	Output 48V DC - Max 10A For recessed track	1A4180300.04.00	
Matt Black	Output 48V DC - Max 10A For recessed track	1A4180400.04.00	




End cap / Tappo di chiusura			Not included
Matt White		1A6870300.05.00	
Matt Black		1A6870400.05.00	



Vertical jointing connector / Connettore verticale passante			Not included
Matt White	Output 48V DC - Max 7A Brass joint	1A6870300.10.00	
Matt Black	Output 48V DC - Max 7A Brass joint	1A6870400.10.00	



Vertical insulating connector / Connettore verticale isolante			Not included
Matt White	Brass joint	1A6870300.11.00	
Matt Black	Brass joint	1A6870400.11.00	



Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione




Ceiling suspension kit - 2 m / Kit di sospensione a soffitto - 2 m			Not included
Matt White		1A6870300.07.00	
Matt Black		1A6870400.07.00	




Recessed suspension kit - 2 m / Kit di sospensione a incasso - 2 m			Not included
Matt White	Plasterboard cut-out Ø 35 mm Minimum space for mounting 120 mm	1A6870300.08.00	
Matt Black	Plasterboard cut-out Ø 35 mm Minimum space for mounting 120 mm	1A6870400.08.00	


Drivers / Alimentatori

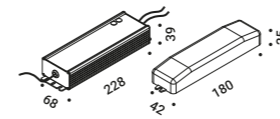

Driver with optoisolator / Alimentatore con optoisolatore			Not included
	Input 100-240V - 50/60Hz Output 48V - 150W - IP20 - DALI	1A2810000.11.00	

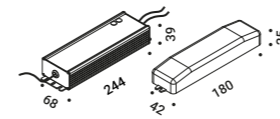


Driver with optoisolator / Alimentatore con optoisolatore			Not included
	Input 100-240V - 50/60Hz Output 48V - 240W - IP20 - DALI	1A6870000.13.00	

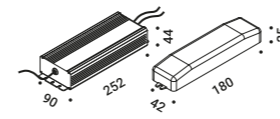


Driver with optoisolator / Alimentatore con optoisolatore			Not included
	Input 100-240V - 50/60Hz Output 48V - 320W - IP20 - DALI	1A2810000.12.00	

Optional accessories / Accessori opzionali


Installation kits / Kit d'installazione




Linear connector / Connettore lineare			Not included
Matt White	Output 48V DC - Max 10A	1A4170300.16.00	
Matt Black	Output 48V DC - Max 10A	1A4170400.16.00	




Fixing bracket / Staffa di fissaggio			Not included
Matt White		1A6870300.04.00	
Matt Black		1A6870400.04.00	
Matt Nickel		1A6874500.04.00	




Cover - 3 m / Copertura - 3 m			Not included
Matt White		1A6870300.06.00	
Matt Black		1A6870400.06.00	



Strip LED connector / Connettore per Strip LED			Not included
Matt White	Output 48V DC - Max 1A Compulsory with Strip LED	1A6870300.14.00	
Matt Black	Output 48V DC - Max 1A Compulsory with Strip LED	1A6870400.14.00	



Strip LED diffuser - 3 m / Diffusore per Strip LED - 3 m			Not included
Standard	Compulsory with Strip LED	1A6870000.15.00	







Locking tool / Strumento per bloccaggio			Not included
Standard		1A6870000.12.00	

LED modules / Moduli LED




Strip LED - 5 m - IP20 *Compulsory with 1A687XX00.14.00			Not included
	Input 48V DC - 10W/m - IP20 2700K - 1400lm/m - CRI >90	1A7040000.27.20	
	Input 48V DC - 10W/m - IP20 3000K - 1450lm/m - CRI >90	1A7040000.30.20	

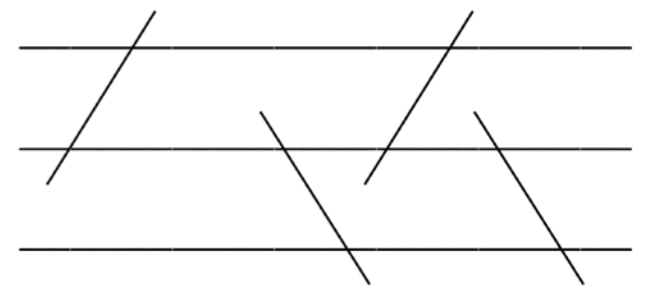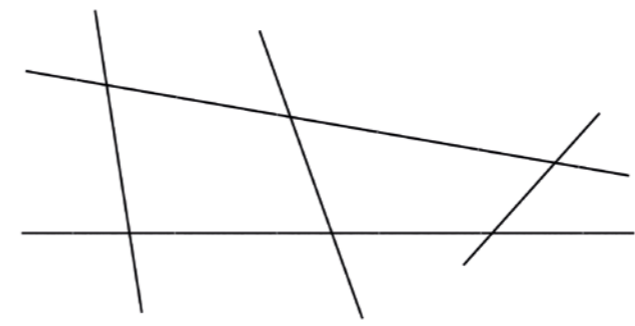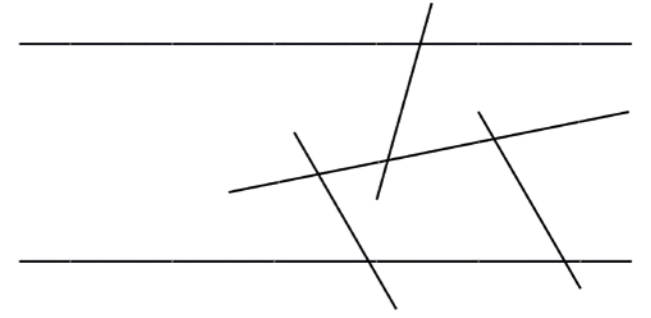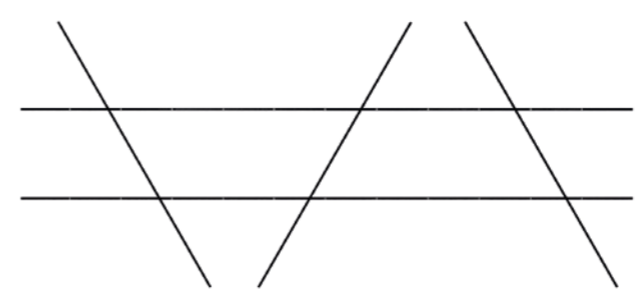

Compulsory accessories / Accessori obbligatori

Luminaires / Corpi illuminanti




SPOT 25 - CARROPONTE

7W
48V DC
2700K - 359lm / 3000K - 375lm
CRI >90
Beam 30°
UGR <19


Driver integrated

DALI

CE IP20



Matt White - 2700K - DALI	1A7000300.27.01
Matt White - 3000K - DALI	1A7000300.30.01
Matt Black - 2700K - DALI	1A7000400.27.01
Matt Black - 3000K - DALI	1A7000400.30.01
Matt Nickel - 2700K - DALI	1A7004500.27.01
Matt Nickel - 3000K - DALI	1A7004500.30.01



SPOT 35 - CARROPONTE

11W
48V DC
2700K - 656lm / 3000K - 684lm
CRI >90
Beam 30°
UGR <19


Driver integrated

DALI

CE IP20



Matt White - 2700K - DALI	1A7010300.27.01
Matt White - 3000K - DALI	1A7010300.30.01
Matt Black - 2700K - DALI	1A7010400.27.01
Matt Black - 3000K - DALI	1A7010400.30.01
Matt Nickel - 2700K - DALI	1A7014500.27.01
Matt Nickel - 3000K - DALI	1A7014500.30.01



SPOT 45 - CARROPONTE

16W
48V DC
2700K - 1101lm / 3000K - 1152lm
CRI >90
Beam 30°
UGR <19


Driver integrated

DALI

CE IP20



Matt White - 2700K - DALI	1A7020300.27.01
Matt White - 3000K - DALI	1A7020300.30.01
Matt Black - 2700K - DALI	1A7020400.27.01
Matt Black - 3000K - DALI	1A7020400.30.01
Matt Nickel - 2700K - DALI	1A7024500.27.01
Matt Nickel - 3000K - DALI	1A7024500.30.01



SPOT ZOOMABLE - CARROPONTE

10W
48V DC
2700K - 599lm / 699lm
3000K - 626lm / 726lm
CRI >90

Beam 15° / 36°

Driver integrated

DALI

CE IP20



CALMA S

4W


Max 350mA DC

2700K - 150lm / 3000K - 160lm

CRI >90

Driver not included

CE IP20



MISS 25

4W


Max 350mA DC

2700K - 150lm / 3000K - 160lm

CRI >90

Driver not included

CE IP20




Matt White - 2700K - DALI	1A7030300.27.01
Matt White - 3000K - DALI	1A7030300.30.01
Matt Black - 2700K - DALI	1A7030400.27.01
Matt Black - 3000K - DALI	1A7030400.30.01
Matt Nickel - 2700K - DALI	1A7034500.27.01
Matt Nickel - 3000K - DALI	1A7034500.30.01

Matt White - 2700K	(White cable)	1A6890300.27.20
Matt White - 3000K	(White cable)	1A6890300.30.20
Matt Black - 2700K	(White cable)	1A6890400.27.20
Matt Black - 3000K	(White cable)	1A6890400.30.20
Polished Gold - 2700K	(Black cable)	1A6891900.27.20
Polished Gold - 3000K	(Black cable)	1A6891900.30.20
Total Black - 2700K	(Black cable)	1A6892600.27.20
Total Black - 3000K	(Black cable)	1A6892600.30.20
Matt Nickel - 2700K	(Black cable)	1A6894500.27.20
Matt Nickel - 3000K	(Black cable)	1A6894500.30.20

Matt White - 2700K	(White cable)	1A6960300.27.20
Matt White - 3000K	(White cable)	1A6960300.30.20
Matt Black - 2700K	(White cable)	1A6960400.27.20
Matt Black - 3000K	(White cable)	1A6960400.30.20
Total Black - 2700K	(Black cable)	1A6962600.27.20
Total Black - 3000K	(Black cable)	1A6962600.30.20
Polished Black Chrome - 2700K	(Black cable)	1A6962800.27.20
Polished Black Chrome - 3000K	(Black cable)	1A6962800.30.20
Matt Nickel - 2700K	(Black cable)	1A6964500.27.20
Matt Nickel - 3000K	(Black cable)	1A6964500.30.20

Suspension kits / Kit di sospensione



CARROPONTE adapter / Adattatore per CARROPONTE

Matt White	Input 48V DC - Output 350mA DC Max 4W - IP20 - DALI	CALMA S / MISS 25	1X0290300.01.01	Not included
Matt Black	Input 48V DC - Output 350mA DC Max 4W - IP20 - DALI	CALMA S / MISS 25	1X0290400.01.01	
Matt Nickel	Input 48V DC - Output 350mA DC Max 4W - IP20 - DALI	CALMA S / MISS 25	1X0294500.01.01	

Ceiling / suspension luminaire with direct light for indoor use.

A perfect tool with direct light and high lighting performance.

The luminaire is in matt white polyamide.
The light source is in polished black polycarbonate.


The light source is LED with integrated module.
In D13 PL, the driver is integrated, with a dimmer function.
In D13 S, the electric cable is transparent.

Apparecchio di illuminazione da soffitto / sospensione, a luce diretta, per interni.

Un perfetto utensile a luce diretta e ad alte prestazioni illuminotecniche.


Il corpo illuminante è in policarbonato bianco opaco.
La parte ottica è in policarbonato nero lucido.

La sorgente luminosa è a LED e a modulo integrato.
In D13 PL, il driver è integrato e dimmerabile.
In D13 S, il cavo elettrico è trasparente.

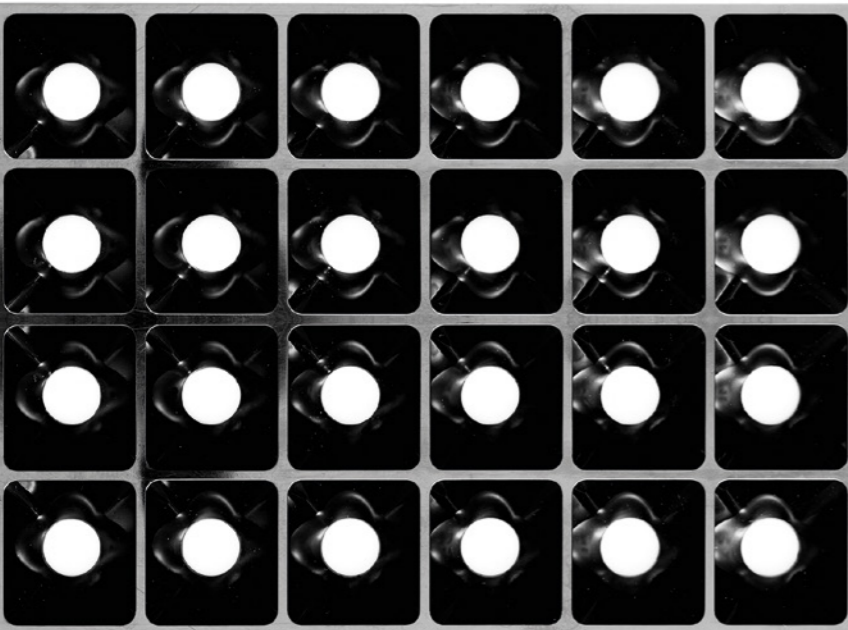

Finish

.34 Matt White/Black Bicolour

**D13 PL**

44W

220-240V - 50/60Hz

3000K - 5542lm / 4000K - 5849lm /

6000K - 5773lm

CRI >90


UGR <19

Driver integrated

DALI

CE IP20

Matt White/Black Bicolour - 3000K / 4000K / 6000K - DALI 1A6973400.96.01

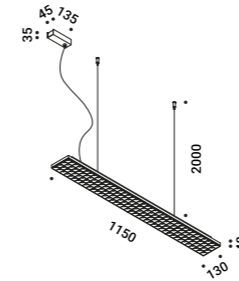**D13 S**

44W

220-240V - 50/60Hz

3000K - 5542lm / 4000K - 5849lm /

6000K - 5773lm

CRI >90


UGR <19

Driver integrated

DALI

CE IP20

Matt White/Black Bicolour - 3000K / 4000K / 6000K - DALI 1A6983400.96.01

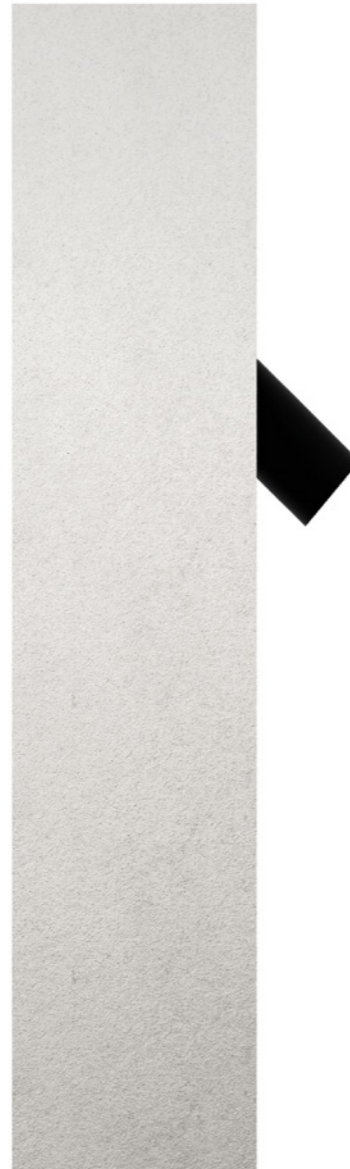

Floor / wall luminaire with direct light for outdoor use.

Strength blended with elegance.

The body is in sanded matt black anodised or natural sanded aluminium and the inner frame is in sanded matt black anodised aluminium.
The spotlight is in sanded matt black anodised aluminium and can be adjusted up to 45° in one direction. In IPE BOLLARD, a coach screw accessory is available for lawns, and a natural or matt black anodised aluminium base is available for fixing to rigid supports.

The light source is LED with integrated module.
In IPE BOLLARD, the driver is integrated and has no dimmer function. In IPE P, the driver is not included but is available as an accessory. The electric cable is matt black and 1 m long. An electric connector is included for outdoor use.


Apparecchio di illuminazione da terra / parete, a luce diretta, per esterni.

La robustezza coniugata all'eleganza.

Il corpo è in alluminio anodizzato nero opaco sabbato o naturale sabbato e il telaio interno è in alluminio anodizzato nero opaco sabbato. Il proiettore è in alluminio anodizzato nero opaco sabbato ed è orientabile fino a 45° in una direzione. Per IPE BOLLARD è disponibile l'accessorio tirafondo per i terreni erbosi e una base in alluminio anodizzato nero opaco o naturale per fissaggio su supporti rigidi.

La sorgente luminosa è a LED e a modulo integrato.
In IPE BOLLARD, il driver è integrato e non dimmerabile. In IPE P, il driver non è incluso, ma è disponibile come accessorio. Il cavo elettrico è di colore nero opaco e 1 m di lunghezza. È incluso un connettore elettrico per esterni.

Finish	.04 Matt Black	.44 Natural Aluminium
Certification	IPE BOLLARD: Luminaire US/CAN certification pending. IPE P: Luminaire available for US/CAN market. Available for CHINA market. IPE BOLLARD: Apparecchio illuminante con certificazione US/CAN in corso. IPE P: Apparecchio illuminante disponibile per mercato US/CAN. Disponibile per mercato CHINA.	



IPE BOLLARD

8,6W
 110-240V - 50/60Hz
 2700K - 257lm / 3000K - 257lm
 CRI >90
 Beam 25°
 UGR <19
 Driver integrated
 ON/OFF




Matt Black - 2700K - ON/OFF	1A6480400.27.00
Matt Black - 3000K - ON/OFF	1A6480400.30.00
Natural Aluminium - 2700K - ON/OFF	1A6484400.27.00
Natural Aluminium - 3000K - ON/OFF	1A6484400.30.00

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Base / Base		Not included
Matt Black	1X0310400.01.00	
Natural Aluminium	1X0314400.01.00	




Anchoring bolt / Tirafondo		Not included
Cut-out Ø 250 mm Minimum space for mounting 350 mm	1X0310000.02.00	



Driver connector IP68 / Connettore driver IP68		Included
1 Piece	1A1660000.00.00	



**IPE P**


6,4W
24V DC
2700K - 257lm / 3000K - 257lm
CRI >90
Beam 25°
UGR <19
Driver not included



Matt Black - 2700K	1A6500400.27.20
Matt Black - 3000K	1A6500400.30.20
Natural Aluminium - 2700K	1A6504400.27.20
Natural Aluminium - 3000K	1A6504400.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori




Driver / Alimentatore		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68		Not included
1 Piece		1A1660000.00.00

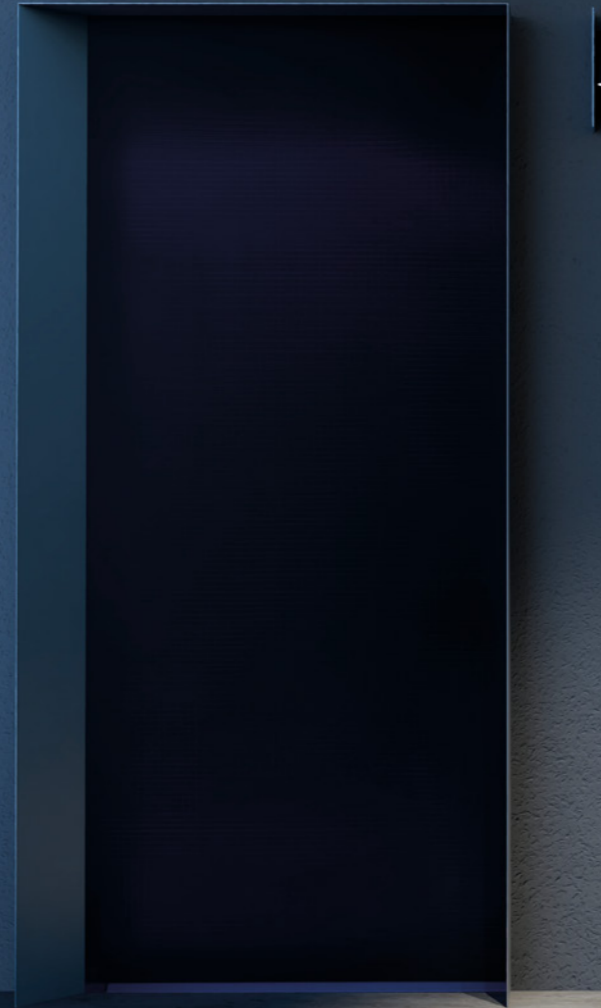



Floor luminaire with direct and indirect light for outdoor use.

A small luminous insect still on an ultra-thin stem.

The stem is in matt black fibreglass. The luminaire is in matt black anodised aluminium and transparent methacrylate. It is fixed in the ground with a spike. OcchiOlinO is available in two different heights.

The light source is LED with integrated module. The electric cable is matt black and 5 m long. The driver is not included but is available as an accessory. An electric connector is included for outdoor use.

Apparecchio di illuminazione da terra, a luce diretta e indiretta, per esterni.

Un piccolo insetto luminoso fermo su un sottilissimo stelo.

Lo stelo è in fibra di vetro nero opaco. Il corpo illuminante è in alluminio anodizzato nero opaco e in metacrilato trasparente. Il fissaggio al suolo avviene mediante un picchetto. OcchiOlinO è disponibile in due altezze differenti.


La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 5 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio. È incluso un connettore elettrico per esterni.

Finish

.04 Matt Black


Certification

Luminaire available for US/CAN market. Available for CHINA market.
Apparecchio illuminante disponibile per mercato US/CAN. Disponibile per mercato CHINA.



OcchiOlinO 100
 1W
 24V DC
 2700K - 55lm / 3000K - 75lm
 CRI >90
 Driver not included
 CE IP65

Matt Black - 2700K	1A6610400.27.20
Matt Black - 3000K	1A6610400.30.20

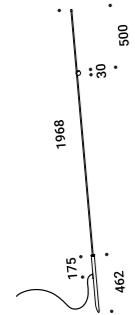

OcchiOlinO 200
 1W
 24V DC
 2700K - 55lm / 3000K - 75lm
 CRI >90
 Driver not included
 CE IP65

Matt Black - 2700K	1A6510400.27.20
Matt Black - 3000K	1A6510400.30.20


Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68	Included
1 Piece	1A1660000.00.00

Drivers / Alimentatori



Driver / Alimentatore	Not included
110-240V 24V/25W/IP67/ON/OFF	1Z1120620



Daide Groppi s.r.l.
Via Belizzi 20 / 22
29122 Piacenza - Italia
+39.0523.571590
info@davidegroppi.com

Daide Groppi s.r.l. © 2026
Company with sole shareholder under the direction and coordination of Dexelance s.p.a.