


Recessed luminaire with direct light for indoor use.

An extreme effort of subtraction. NULLA generates light and propagates mystery. NULLA is the most generous of our lamps. Its sole objective is to hide and give all the attention to whatever it is lighting. What we see is only a tiny black hole, as if it were drawn on the ceiling. A hole in the ceiling, a very bright LED and a lens generate light.

The body is in matt black anodised aluminium. The specific frame is required for installation in plasterboard ceilings. The specific formwork is required for installation in masonry or concrete ceilings. The required hole in the plasterboard and the clearance space above the plasterboard are specified in the dedicated accessories descriptions.

The light source is LED with integrated module. The driver is not included but is available as an accessory. NULLA 25 T24 complies with Title 24 requirements exclusively when used with the frame and the driver specified among the accessories.






NULLA - 23°

9W
24V DC
2700K - 265lm / 3000K - 273lm
CRI >90
Beam 23°
UGR <19
Driver not included



Standard - 2700K	1A4100003.27.20
Standard - 3000K	1A4100003.30.20



NULLA - 32°

9W
24V DC
2700K - 298lm / 3000K - 307lm
CRI >90
Beam 32°
UGR <19
Driver not included



Standard - 2700K	1A2110003.27.20
Standard - 3000K	1A2110003.30.20



NULLA 25 - 23°

5W
24V DC
2700K - 228lm / 3000K - 245lm
CRI >90
Beam 23°
UGR <19
Driver not included



Standard - 2700K	1A4080003.27.20
Standard - 3000K	1A4080003.30.20




NULLA 25 - 32°

5W
24V DC
2700K - 288lm / 3000K - 310lm
CRI >90
Beam 32°
UGR <19
Driver not included



Standard - 2700K	1A2020003.27.20
Standard - 3000K	1A2020003.30.20



NULLA 25 T24 - 32°

5,6W
Max 500mA DC
3000K - 357lm
CRI >90
Beam 32°
Driver not included



Standard - 3000K	1A1010003
------------------	-----------

Compulsory accessories

Installation kits



Plasterboard flange 5/8" Not included			
Matt Black	Cut-out Ø 0.83" Minimum space for mounting 3.94" IP65	NULLA	1A5670400.00.00



Plasterboard flange 0.49" Not included			
Matt Black	Cut-out Ø 1.38" Minimum space for mounting 7.48"	NULLA 25	1A2170400.00.00




Plasterboard flange 0.49" Not included			
Matt Black	Cut-out Ø 1.38" Minimum space for mounting 5.71" IP65	NULLA 25	1A3980400.00.00



Plasterboard flange (bottom) = 0.49" Not included			
Matt Black	Cut-out Ø 1.50" Minimum space for mounting 5.71" IP65	NULLA 25	1A4960400.00.00

Compulsory accessories

Installation kits




Masonry Box				Not included
Standard		NULLA 25	1A2380000.00.00	




Plasterboard flange 0.49"				Not included
	Cut-out \varnothing 1.38"	NULLA 25 T24	18250000	
	Minimum space for mounting 6.30"			
	IP65			


Drivers




Driver				Not included
220-240V(100-127V)	24V/16W(15W)/IP20/DALI	NULLA / NULLA 25	1Z0241180.24	



Driver				Not included
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH - 1-10V	NULLA / NULLA 25	1Z0240870.24	




Driver				Not included
120-277V	24V/60W/IP20/1-10V - TRIAC	NULLA / NULLA 25	1Z2020040	



Driver				Not included
120V	500mA/50W/IP20/1-10V	NULLA 25 T24	1Z2000010	

Optional accessories


Installation kits




Trapdoor for plasterboard 0.49"				Not included
Standard	Cut-out 15.75" x 15.75"	NULLA	1A3790000.00.00	




Trapdoor for plasterboard 0.49"				Not included
Standard	Cut-out 7.87" x 7.87"	NULLA	1A3780000.00.00	

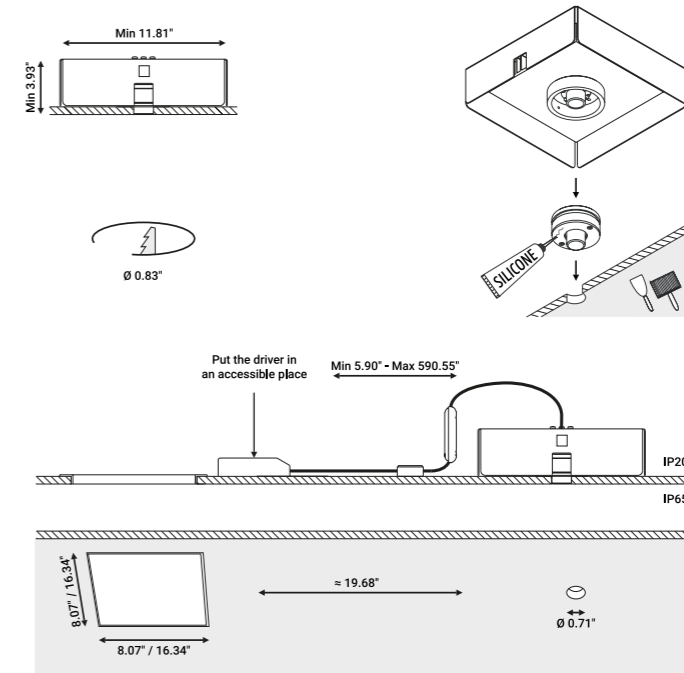


1A2200400.00.00 - 1A5670400.00.00 - NULLA installation conditions

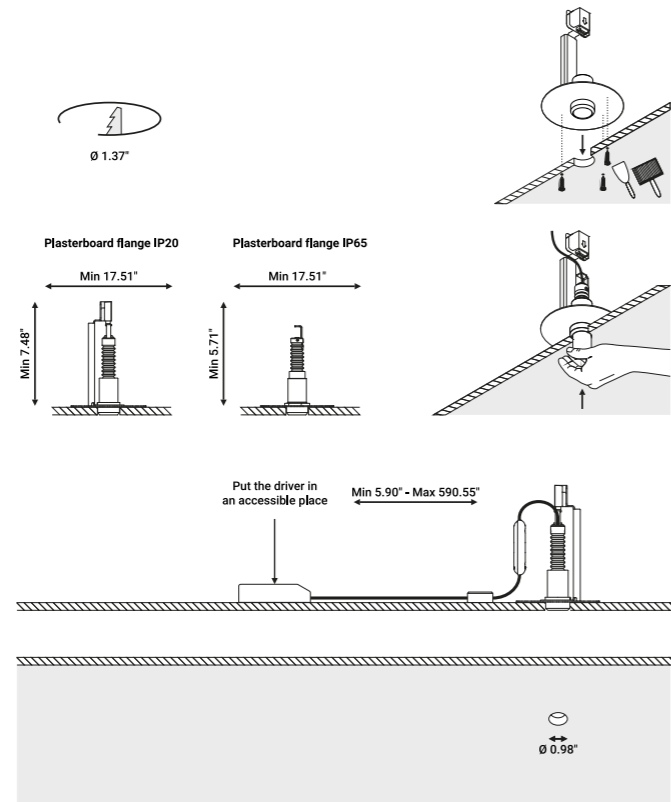

1A2170400.00.00 - 1A3980400.00.00 - NULLA 25 installation conditions

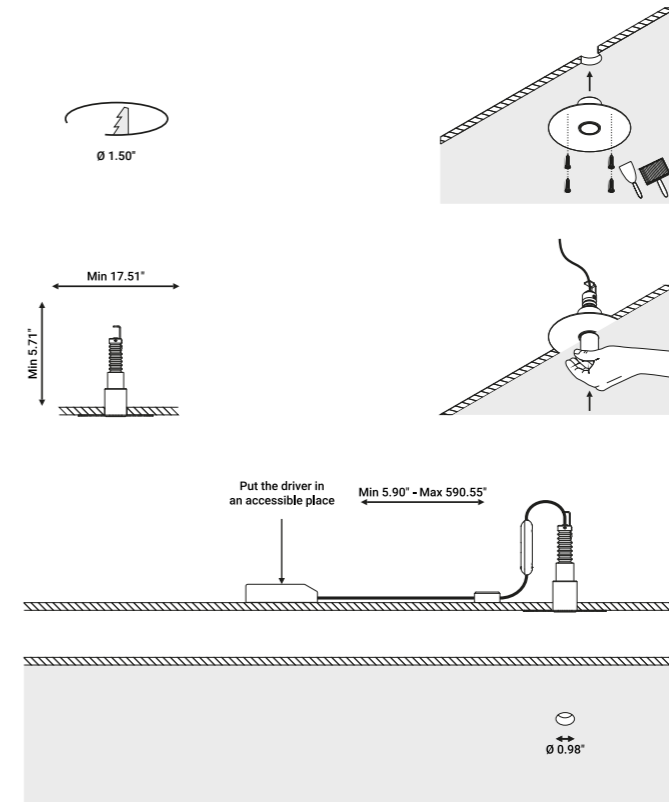

1A4960400.00.00 - NULLA 25 installation conditions

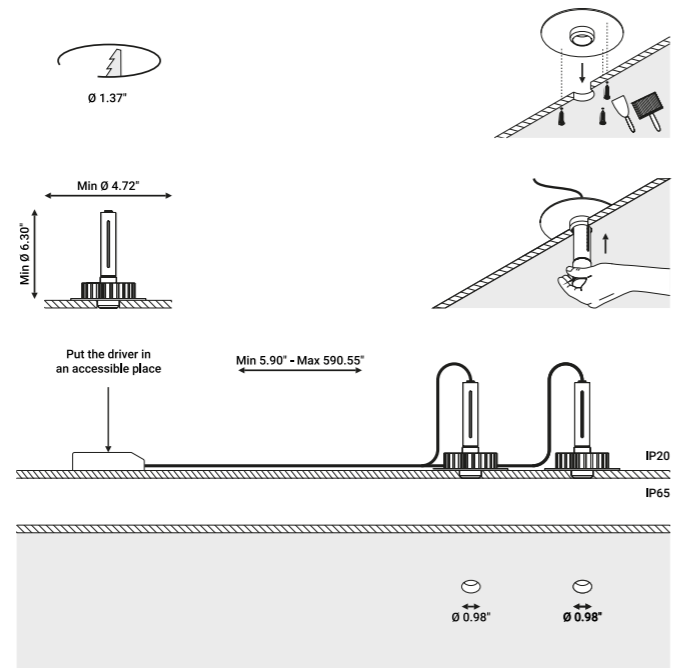

18250000 - NULLA 25 T24 installation conditions

