




FLASH

Davide Groppi / 2017


It is our Infinito model turned around, with the light flowing downwards. The 9 mm wide stainless steel strip can run perfectly up to 36 metres in length (standard versions at 6 / 12 / 18 metres in length).

The ideal solution for direct illumination of spaces with very high ceilings. Its name pays homage to the famous comic book superhero, who can run seven times the speed of light.


How to order - FLASH 6

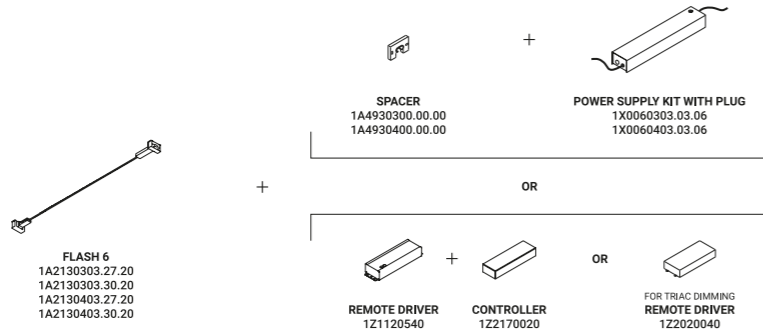

How to order - FLASH 12

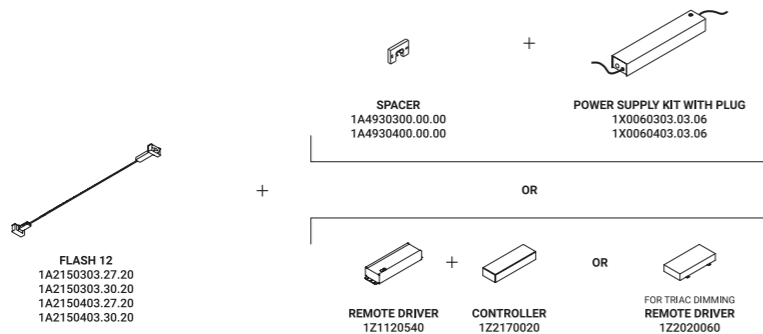


How to order - FLASH 18

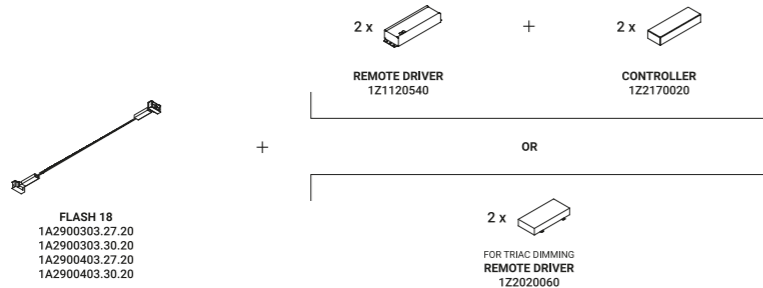

Wall-Systems / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note LED module 236.22" / 472.44" long available with dual emission - LED module 196.85" / 393.70" long with Tunable White technology available with dual emission - Harmonic steel strip 0.39" wide - Can be cut every 1.90".

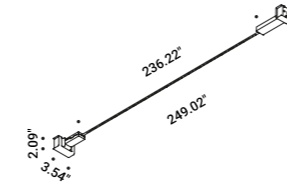


FLASH 6
Length 236.22"
Max 45W
24V DC
2700K - 5592lm / 3000K - 5700lm
CRI >90
Driver not included
UL LISTED

| | |
|--------------------|-----------------|
| Matt White - 2700K | 1A2130303.27.20 |
| Matt White - 3000K | 1A2130303.30.20 |
| Matt Black - 2700K | 1A2130403.27.20 |
| Matt Black - 3000K | 1A2130403.30.20 |



FLASH 12
Length 472.44"
Max 90W
24V DC
2700K - 11184lm / 3000K - 11400lm
CRI >90
Driver not included
UL LISTED

| | |
|--------------------|-----------------|
| Matt White - 2700K | 1A2150303.27.20 |
| Matt White - 3000K | 1A2150303.30.20 |
| Matt Black - 2700K | 1A2150403.27.20 |
| Matt Black - 3000K | 1A2150403.30.20 |

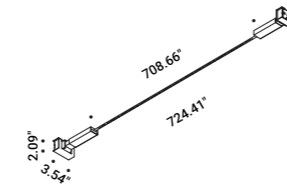

FLASH 18
Length 708.66"
Max 135W
24V DC
2700K - 16758lm / 3000K - 20124lm
CRI >90
Driver not included


| | |
|--------------------|-----------------|
| Matt White - 2700K | 1A2900303.27.20 |
| Matt White - 3000K | 1A2900303.30.20 |
| Matt Black - 2700K | 1A2900403.27.20 |
| Matt Black - 3000K | 1A2900403.30.20 |

How to order -
FLASH 6 DE



FLASH 6 DE
1A1290303.27.20
1A1290303.30.20
1A1290403.27.20
1A1290403.30.20

+




OR



+




OR



How to order -
FLASH 12 DE



FLASH 12 DE
1A1300303.27.20
1A1300303.30.20
1A1300403.27.20
1A1300403.30.20

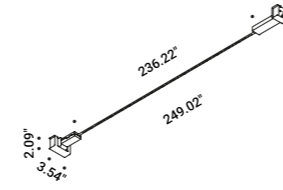


FLASH 6 DE

Length 236.22" -
Dual emission and double switch
Max 90W
24V DC
2700K - Up 5592lm - Down 5592lm /
3000K - Up 5700lm - Down 5700lm
CRI >90
Driver not included

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A1290303.27.20
1A1290303.30.20
1A1290403.27.20
1A1290403.30.20

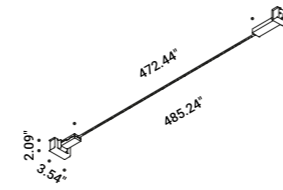


FLASH 12 DE

Length 472.44" -
Dual emission and double switch
Max 180W
24V DC
2700K - Up 11184lm - Down 11184lm /
3000K - Up 11400lm - Down 11400lm
CRI >90
Driver not included


Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A1300303.27.20
1A1300303.30.20
1A1300403.27.20
1A1300403.30.20


How to order -
FLASH 5 TW

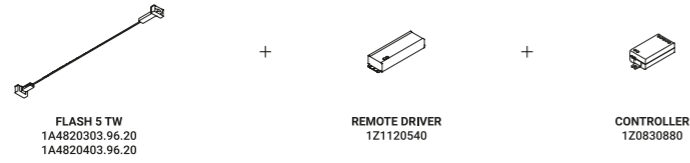

How to order -
FLASH 10 TW

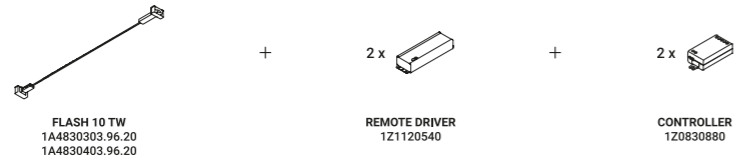


Note Tunable White describes the variable colour temperature controls from warm white to cool white light.

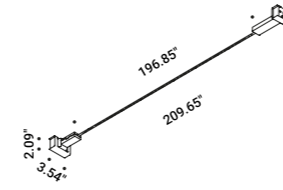

FLASH 5 TW
Length 196.85" - Tunable White
Max 50W
24V DC
2700/6500K - 7650lm
CRI >90
Driver not included

Matt White - 2700/6500K
Matt Black - 2700/6500K

1A4820303.96.20
1A4820403.96.20

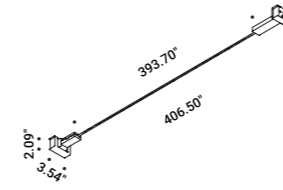

FLASH 10 TW
Length 393.70" - Tunable White
Max 100W
24V DC
2700/6500K - 15300lm
CRI >90
Driver not included

Matt White - 2700/6500K
Matt Black - 2700/6500K

1A4830303.96.20
1A4830403.96.20

How to order -
FLASH 5 DE TW



FLASH 5 DE TW
1A4840303.96.20
1A4840403.96.20

+



REMOTE DRIVER
1Z1120540

+



CONTROLLER
1Z0830880

How to order -
FLASH 10 DE TW



FLASH 10 DE TW
1A4850303.96.20
1A4850403.96.20

+



REMOTE DRIVER
1Z1120540


+



CONTROLLER
1Z0830880

Note

Tunable White describes the variable colour temperature controls from warm white to cool white light.

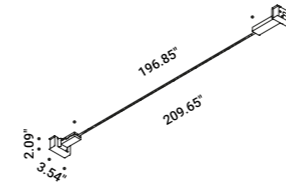


FLASH 5 DE TW

Length 196.85" - Dual emission -
Tunable White
Max 100W
24V DC
2700/6500K - 15300lm
CRI >90
Driver not included

Matt White - 2700/6500K
Matt Black - 2700/6500K

1A4840303.96.20
1A4840403.96.20

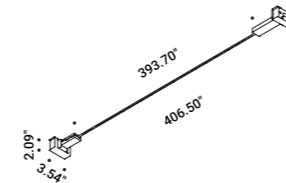

FLASH 10 DE TW

Length 393.70" - Dual emission -
Tunable White
Max 200W
24V DC
2700/6500K - 30600lm
CRI >90
Driver not included

Matt White - 2700/6500K
Matt Black - 2700/6500K

1A4850303.96.20
1A4850403.96.20


Compulsory accessories

Installation kit




| Spacer | | | | Not included |
|------------|--------------------------------|--------------------|-----------------|--------------|
| Matt White | For power supply kit with plug | FLASH 6 / FLASH 12 | 1A4930300.00.00 | |
| Matt Black | For power supply kit with plug | FLASH 6 / FLASH 12 | 1A4930400.00.00 | |


Electrical power supply




| Power supply kit with plug | | | | Not included |
|----------------------------|--|--------------------|-----------------|--------------|
| Matt White | Input 120V - 60Hz - Output 24V - Max 90W - IP20 | FLASH 6 / FLASH 12 | 1X0060303.03.06 | |
| Matt Black | Input 120V - 60Hz - Output 24V - Max 90W - IP20 | FLASH 6 / FLASH 12 | 1X0060403.03.06 | |




| Driver LED | | | | Not included |
|------------|----------------------------|----------------------|-----------|--------------|
| 120-277V | 24V/60W/IP20/TRIAC - 1-10V | FLASH 6 / FLASH 6 DE | 1Z2020040 | |




| Driver LED | | | | Not included |
|------------|----------------------------|--------------------------------------|-----------|--------------|
| 120-277V | 24V/96W/IP20/TRIAC - 1-10V | FLASH 12 / FLASH 18 / FLASH 12 DE | 1Z2020060 | |



| Driver LED | | | | Not included |
|------------|--------------------|--|-----------|--------------|
| 100-240V | 24V/96W/IP67/1-10V | FLASH 6 / FLASH 12 / FLASH 18 / FLASH 6 DE / FLASH 12 DE / FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW | 1Z1120540 | |



| Controller | | | | Not included |
|------------|------------------------------|--|-----------|--------------|
| Matt Black | DALI - PUSH - 0/1-10V - IP20 | FLASH 6 / FLASH 12 / FLASH 18 / FLASH 6 DE / FLASH 12 DE | 1Z2170020 | |




| Controller Casambi - Tunable White | | | | Not included |
|------------------------------------|--|--|-----------|--------------|
| | | FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW | 1Z0830880 | |


The sizes are expressed in inches.

Optional accessories


Installation kit




| Wall and ceiling rose | | | | Not included |
|-----------------------|--|--|-----------------|--------------|
| Matt White | | | 1A3440303.00.00 | |
| Matt Black | | | 1A3440403.00.00 | |




| Ceiling connection kit | | | | Not included |
|------------------------|--|--|-----------------|--------------|
| Matt Black | | | 1A0080400.00.00 | |




| Kit wall connection vertical sloped 45° | | | | Not included |
|---|--|--|-----------------|--------------|
| Matt Black | | | 1A0120400.00.00 | |



| Kit wall connection sloped right 75° | | | | Not included |
|--------------------------------------|--|--|-----------------|--------------|
| Matt Black | | | 1A0340400.00.00 | |




| Kit wall connection sloped left 75° | | | | Not included |
|-------------------------------------|--|--|-----------------|--------------|
| Matt Black | | | 1A0350400.00.00 | |




| Wall back plate | | | | Not included |
|-----------------|--|--|-----------------|--------------|
| Matt White | | FLASH 6 / FLASH 12 / | 1X0090300.01.00 | |
| Matt Black | | FLASH 18 / FLASH 6 DE / FLASH 12 DE / FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW | 1X0090400.01.00 | |




| Swallows | | | | Not included |
|------------|--|--|-----------------|--------------|
| Matt Black | | | 1A0800400.00.00 | |

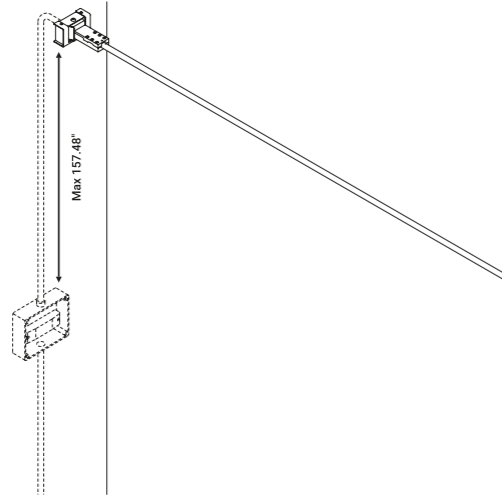


Remote power supply kit

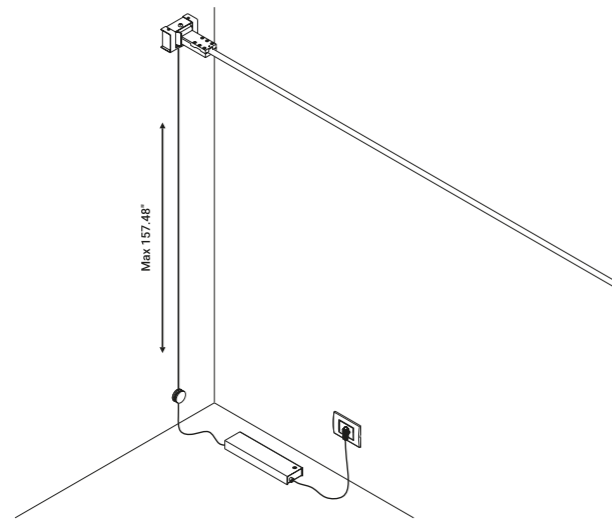


Power supply kit with plug

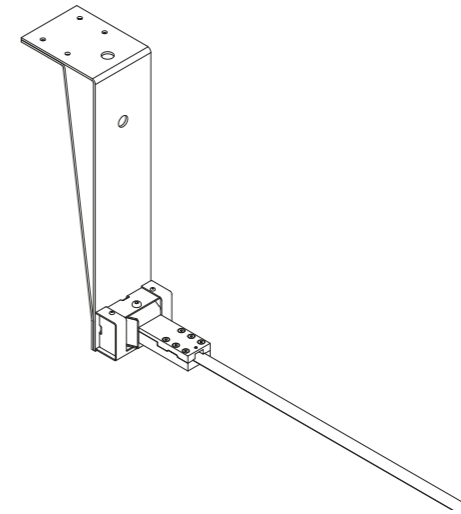


1A0080400.00.00 - Ceiling connection kit

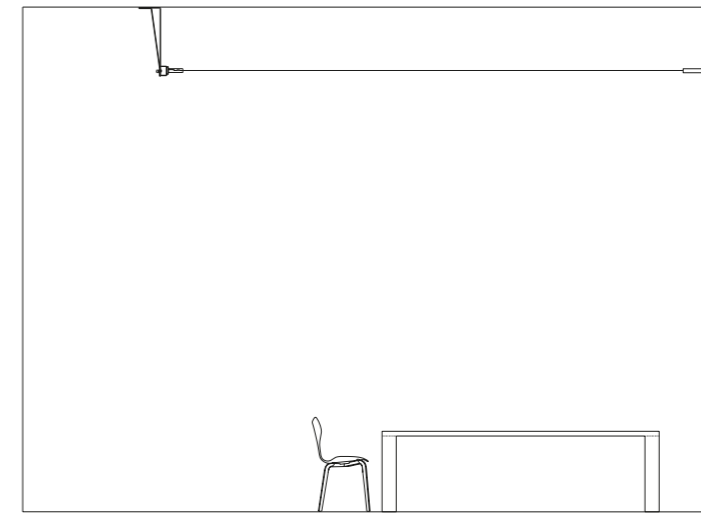


1A0080400.00.00 - Example of installation with ceiling connection kit

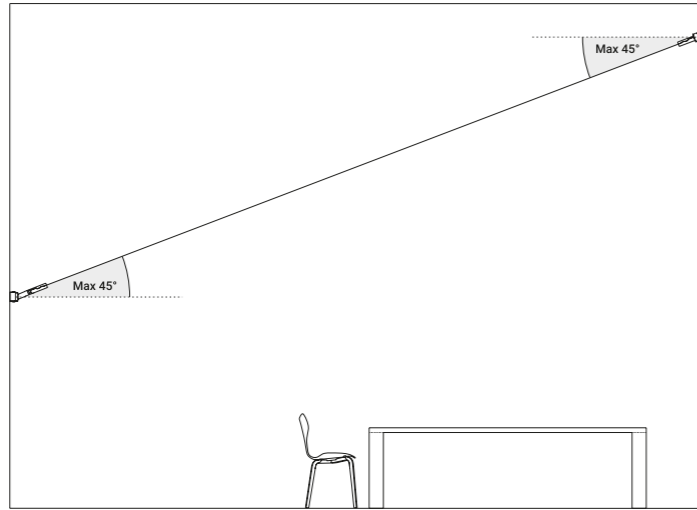

1A0120400.00.00 - Kit wall connection vertical sloped 45°

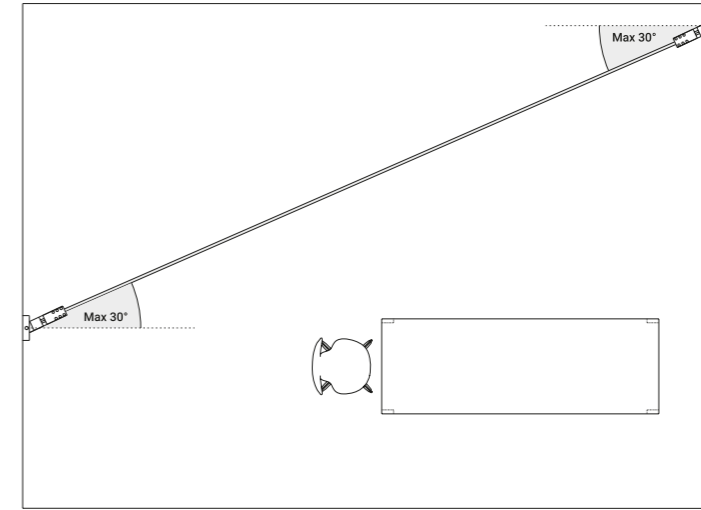

Example of installation

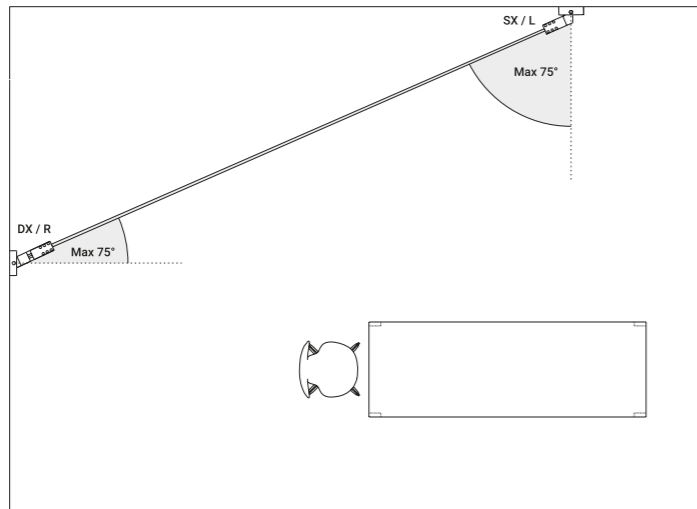

1A0340400.00.00 - 1A0350400.00.00 - Kit wall connection sloped 75°