





The sizes are expressed in millimeters / inches.

DESIGN OMAR CARRAGLIA - 2015
SUSPENSION LAMP - METAL - BLOWN GLASS


CATHODE 1

 ENDLESS SYSTEM VERSION AVAILABLE

CEILING ROSE

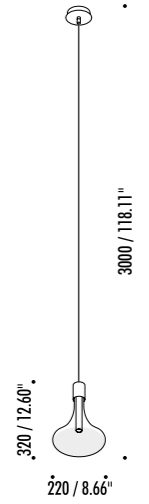

1A2980303.27.00	MATT WHITE - 2700K - ON/OFF	120 V - 60 Hz - 5,6 W LED
1A2980303.30.00	MATT WHITE - 3000K - ON/OFF	2700K - 286 lm - CRI > 90 / 3000K - 286 lm - CRI > 90
		WHITE CABLE - WHITE CEILING ROSE
1A2980803.27.00	BRUSHED BRASS - 2700K - ON/OFF	120 V - 60 Hz - 5,6 W LED
1A2980803.30.00	BRUSHED BRASS - 3000K - ON/OFF	2700K - 286 lm - CRI > 90 / 3000K - 286 lm - CRI > 90
		BLACK CABLE - BLACK CEILING ROSE



DIMMABLE VERSIONS

1A2980303.27.01	MATT WHITE - 2700K - DALI	120 V - 60 Hz - 5,6 W LED 2700K - 286 lm - CRI>90 / 3000K - 286 lm - CRI>90 WHITE CABLE - WHITE CEILING ROSE - DIMMABLE
1A2980303.30.01	MATT WHITE - 3000K - DALI	
1A2980303.27.02	MATT WHITE - 2700K - TRIAC	
1A2980303.30.02	MATT WHITE - 3000K - TRIAC	
1A2980303.27.03	MATT WHITE - 2700K - 1-10 V	120 V - 60 Hz - 5,6 W LED 2700K - 286 lm - CRI>90 / 3000K - 286 lm - CRI>90 BLACK CABLE - BLACK CEILING ROSE - DIMMABLE
1A2980303.30.03	MATT WHITE - 3000K - 1-10 V	
1A2980303.27.04	MATT WHITE - 2700K - PUSH	
1A2980303.30.04	MATT WHITE - 3000K - PUSH	
1A2980803.27.01	BRUSHED BRASS - 2700K - DALI	
1A2980803.30.01	BRUSHED BRASS - 3000K - DALI	
1A2980803.27.02	BRUSHED BRASS - 2700K - TRIAC	
1A2980803.30.02	BRUSHED BRASS - 3000K - TRIAC	
1A2980803.27.03	BRUSHED BRASS - 2700K - 1-10 V	
1A2980803.30.03	BRUSHED BRASS - 3000K - 1-10 V	
1A2980803.27.04	BRUSHED BRASS - 2700K - PUSH	
1A2980803.30.04	BRUSHED BRASS - 3000K - PUSH	





The sizes are expressed in millimeters / inches.

DESIGN OMAR CARRAGLIA - 2015
SUSPENSION LAMP - METAL - BLOWN GLASS

CATHODE 2

CEILING ROSE

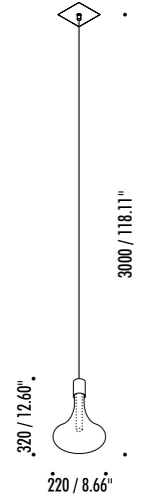

1A2990303.27.00	MATT WHITE - 2700K - ON/OFF	MAX 350 mA DC - 4 W LED 2700K - 286 lm - CRI > 90 / 3000K - 286 lm - CRI > 90
1A2990303.30.00	MATT WHITE - 3000K - ON/OFF	WHITE CABLE - WHITE CEILING ROSE INSTALLATION ON PLASTERBOARD WITH FLAT ROSE AND MAGNETIC FIXING COMPULSORY INSTALLATION KIT INCLUDED PLASTERBOARD CUT-OUT 85 x 97 mm - MINIMUM SPACE FOR MOUNTING 120 mm INCLUDES INDEPENDENT DRIVER INPUT 100-240 V - 50/60 Hz
1A2990803.27.00	BRUSHED BRASS - 2700K - ON/OFF	MAX 350 mA DC - 4 W LED 2700K - 286 lm - CRI > 90 / 3000K - 286 lm - CRI > 90
1A2990803.30.00	BRUSHED BRASS - 3000K - ON/OFF	BLACK CABLE - BLACK CEILING ROSE INSTALLATION ON PLASTERBOARD WITH FLAT ROSE AND MAGNETIC FIXING COMPULSORY INSTALLATION KIT INCLUDED PLASTERBOARD CUT-OUT 85 x 97 mm - MINIMUM SPACE FOR MOUNTING 120 mm INCLUDES INDEPENDENT DRIVER INPUT 100-240 V - 50/60 Hz