





We have always liked to think heretically,
evoking mystery, magic and seduction.
In this case, the lens is not used to focus,
but to modify the vision and perception of the object.
The effect of the convex lens conceals the part of the light beam
and produces the lightest effect
of suspension and inconsistency.
Light and transparency are the true stars of this project.


HOW TO ORDER - SINGLE INSTALLATION WITH RECESSED FIXING KIT OR CEILING FIXING KIT

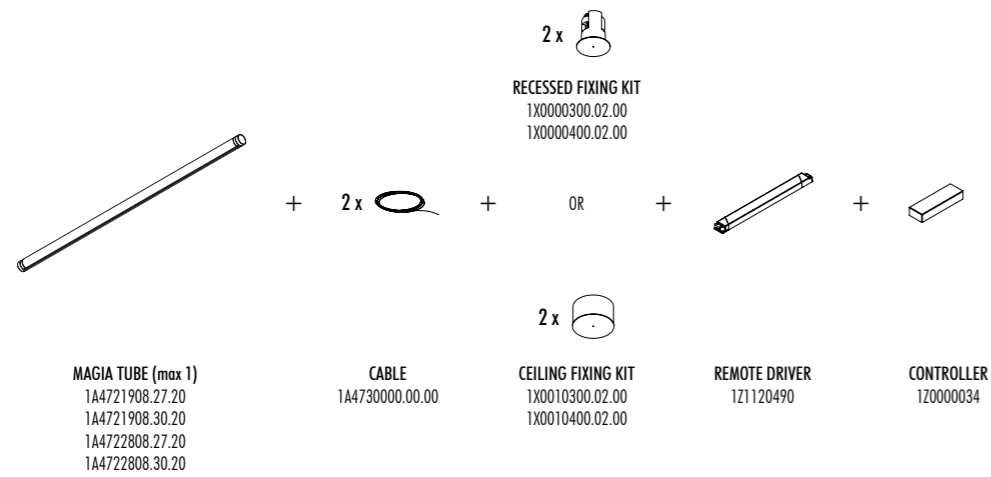


EXAMPLE OF SINGLE INSTALLATION WITH RECESSED FIXING KIT OR CEILING FIXING KIT

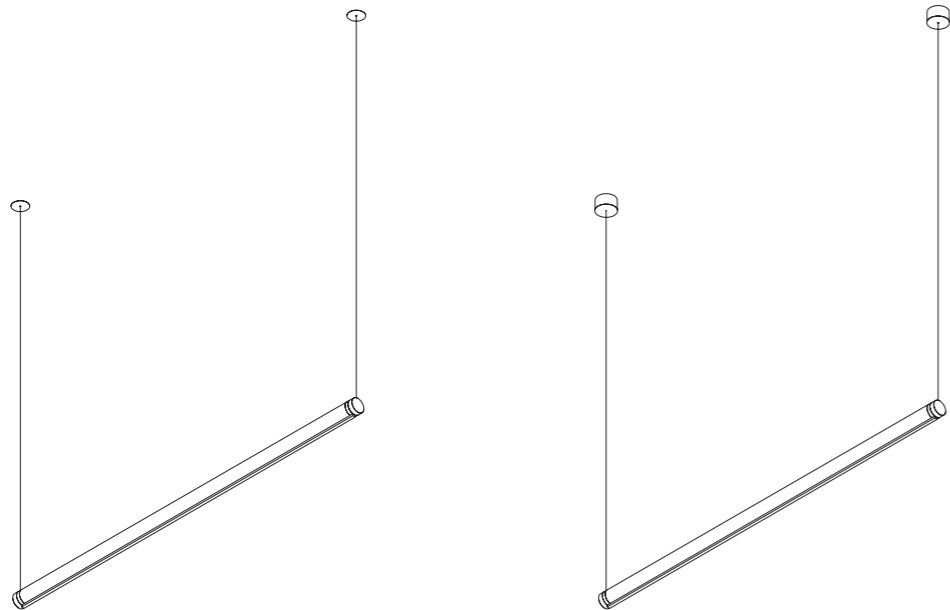

HOW TO ORDER - MULTIPLE INSTALLATION WITH RECESSED FIXING KIT OR CEILING FIXING KIT

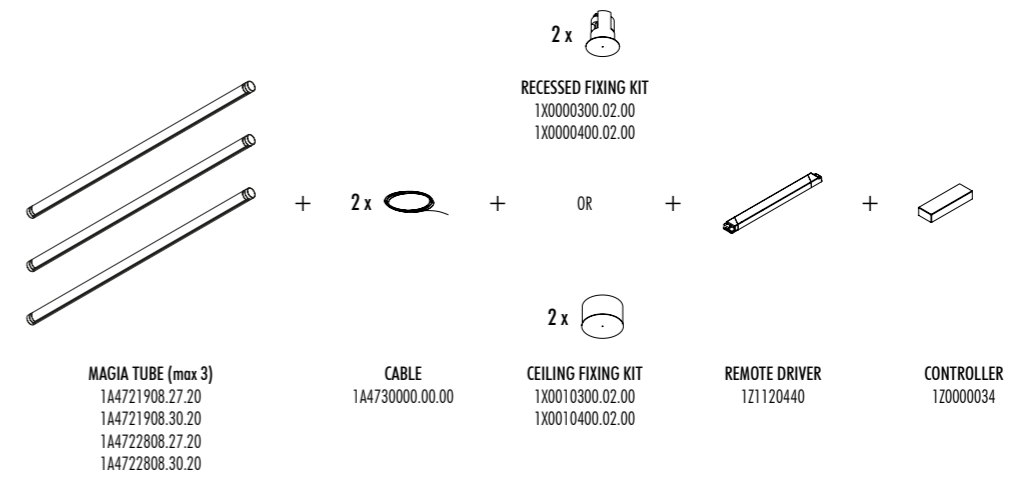

EXAMPLE OF MULTIPLE INSTALLATION WITH RECESSED FIXING KIT OR CEILING FIXING KIT





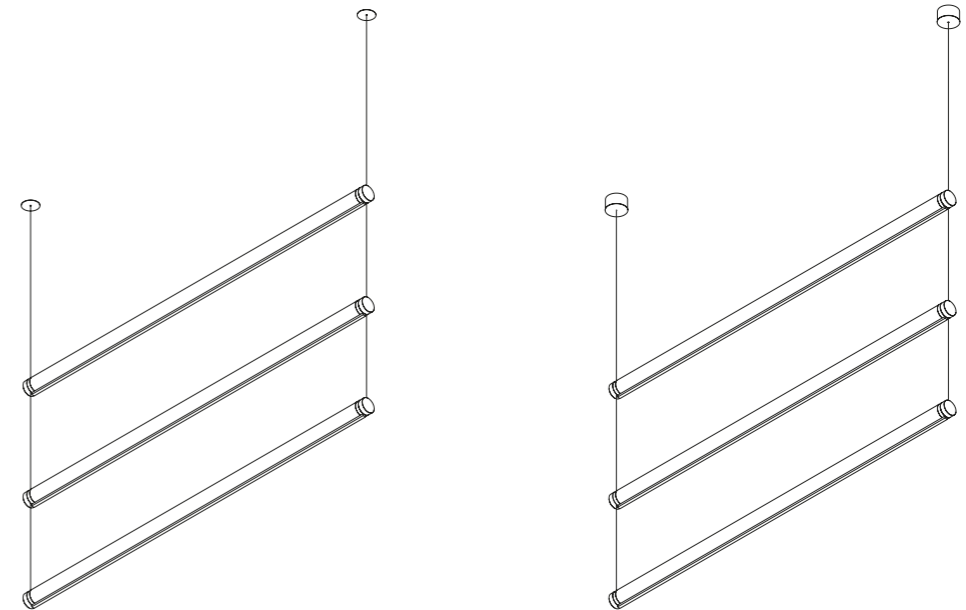



The sizes are expressed in millimeters.

DESIGN MICHELE GROPPI - 2023
CEILING SYSTEM - METAL - PA

MAGIA






1A4721908.27.20	POLISHED GOLD - 2700K	MAGIA TUBE - 24 V DC - 19 W LED 2700K - 1272 lm - CRI > 90 / 3000K - 1312 lm - CRI > 90 COMPULSORY POWER SUPPLY KIT NOT INCLUDED	
1A4721908.30.20	POLISHED GOLD - 3000K		
1A4722808.27.20	POLISHED BLACK CHROME - 2700K		
1A4722808.30.20	POLISHED BLACK CHROME - 3000K		
1A4730000.00.00	STANDARD - 6 m	CABLE - 1 PIECE MAX 60 V DC - MAX 3 TUBES	
1X0000300.02.00	MATT WHITE	RECESSED FIXING KIT PANEL 12,5 mm - 1 PIECE PLASTERBOARD CUT-OUT Ø 44 mm MINIMUM SPACE FOR MOUNTING 70 mm	
1X0000400.02.00	MATT BLACK		
1X0010300.02.00	MATT WHITE	CEILING FIXING KIT - 1 PIECE	
1X0010400.02.00	MATT BLACK		
1X0050300.01.00	MATT WHITE	WALL BACK PLATE FOR MOUNTING ON BRICK MASONRY WALLS	

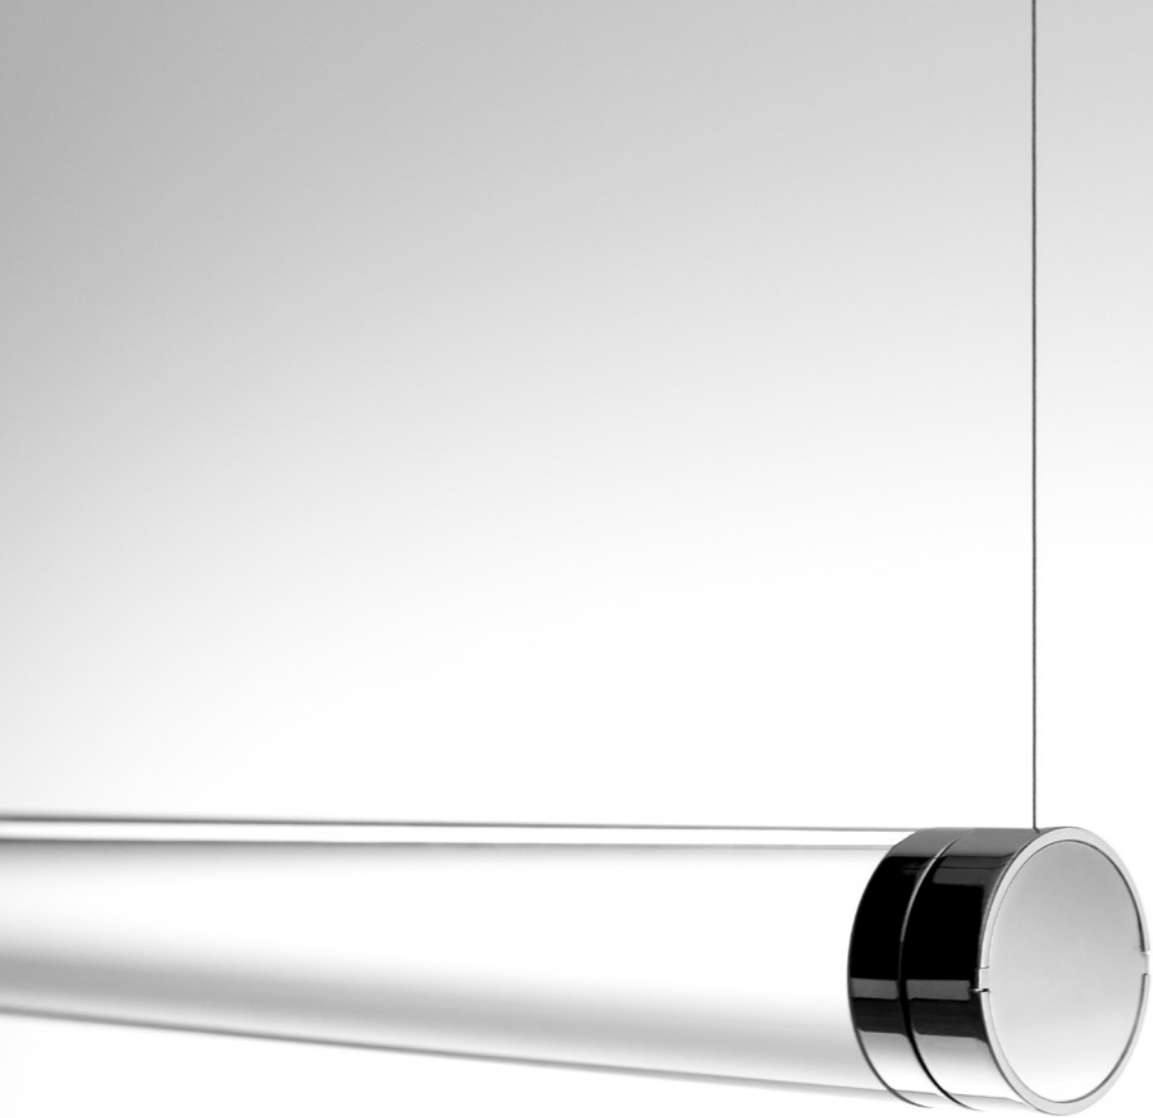

The sizes are expressed in millimeters.

COMPULSORY POWER SUPPLY KIT

1Z1120490	STANDARD	REMOTE DRIVER - MAX 1 TUBE INPUT 100-240 V - 50/60 Hz - OUTPUT 24 V DC - 50 W - IP20 NOT DIMMABLE	
1Z1120440	STANDARD	REMOTE DRIVER - MAX 3 TUBES INPUT 100-240 V - 50/60 Hz - OUTPUT 24 V DC - 80 W - IP20 NOT DIMMABLE	
1Z1120500	STANDARD	REMOTE DRIVER - MAX 6 TUBES INPUT 100-240 V - 50/60 Hz - OUTPUT 24 V DC - 150 W - IP67 0/1-10 V DIMMABLE	
1Z0000034	STANDARD	CONTROLLER DIMMABLE DALI - PUSH - TRIAC - 1-10 V - IP20	