



FRAMELESS

/ 2016

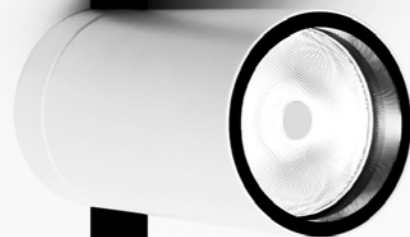

Plasterboard track for recessed installation.
It is designed for use with state-of-the-art LED modules
to create a wide range of light beams.

Layout example

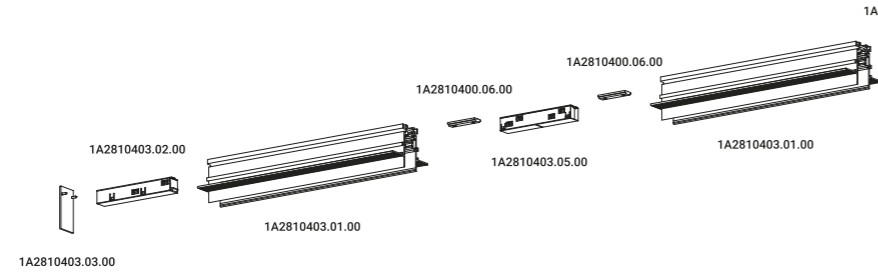


Systems / Direct / Indoor

Material

Finish .03 Matt White

.04 Matt Black



DOT FRAMELESS


13W
 48V DC
 2700K / 3000K
 CRI 97
 Driver not included
 DALI

Matt White - 2700K - DALI
 Matt White - 3000K - DALI
 Matt Black - 2700K - DALI
 Matt Black - 3000K - DALI

1A0090303.27.01
 1A0090303.30.01
 1A0090403.27.01
 1A0090403.30.01

Compulsory accessories

Installation kit



Plasterboard track 0.49"			Not included
Matt Black	48V DC - Max 15A - Lenght 78.74" - Cut-out 78.74" x 0.49"	1A2810403.01.00	



Power connector			Not included
Matt Black	Output 48V - Max 15A	1A2810403.02.00	



End cap for power connector			Not included
Matt Black		1A2810403.03.00	



End cap			Not included
Matt Black		1A2810400.04.00	




Linear connector			Not included
Matt Black	Output 48V - Max 15A	1A2810403.05.00	



Reinforcing bracket			Not included
Matt Black		1A2810400.06.00	



Clamp with M6 grippe			Not included
		1A2810000.07.00	



Suspension set			Not included
		1A2810000.08.00	

The sizes are expressed in inches.

Compulsory accessories

Installation kit



Plaster installation guard			Not included
	Lenght 78.74"	1A2810000.09.00	




Cutting tool			Not included
		1A2810000.10.00	

Other accessories




Lens				Not included
Beam - 14°	2700K - CRI 97 - 983lm	DOT FRAMELESS	1A3090000.00.00	
	3000K - CRI 97 - 1038lm			
Beam - 24°	2700K - CRI 97 - 943lm	DOT FRAMELESS	1A3100000.00.00	
	3000K - CRI 97 - 996lm			
Beam - 36°	2700K - CRI 97 - 955lm	DOT FRAMELESS	1A3110000.00.00	
	3000K - CRI 97 - 1005lm			
Beam - 50°	2700K - CRI 97 - 965lm	DOT FRAMELESS	1A3120000.00.00	
	3000K - CRI 97 - 1016lm			


Electrical power supply

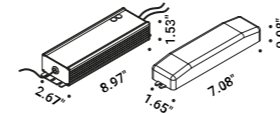


Remote power supply kit - TRIAC			Not included
	Input 120V - 60Hz - Output 48V - 150W - IP67 - DALI	1A2810003.11.00	



Remote power supply kit			Not included
	Input 120V - 60Hz - Output 48V - 320W - IP67 - DALI	1A2810003.12.00	



Driver LED			Not included
100-240V	48V/150W/IP67/1-10V	1Z1120250	



Driver LED			Not included
100-240V	48V/320W/IP67/1-10V	1Z1120380	