

Wall or ceiling lighting system with direct light for indoor use.

Light runs on a wire.
An almost imperceptible wire, suspended in space.
Like a tightrope walker on an ultra-thin wire, the light reaches everywhere, thrilling and impalpable.

The rose is in matt white painted steel.
The tie-rod body is in matt white painted aluminium, the tensioner is in polished chrome galvanised brass.
The luminaire is in textured matt black polyamide.
The lens can be replaced even with the luminaire assembled.

The light source is LED with integrated module.
The unipolar cable is in galvanised steel and silver-copper.
The version with rose (class I) has an integrated driver with dimmer function.
For the version without rose (class III) the driver is not included but available as an accessory.

Sistema di illuminazione da parete o da soffitto, a luce diretta, per interni.

La luce corre sul filo.
Un filo quasi impercettibile, sospeso nello spazio.
Come un funambolo su una corda sottilissima la luce arriva ovunque, con leggerezza ed emozione.

Il rosone è in acciaio verniciato bianco opaco.
Il corpo del tirante è in alluminio verniciato bianco opaco e il tenditore è in ottone galvanizzato cromo lucido.
Il corpo illuminante è in poliammide nero opaco texturizzato.
È possibile sostituire l'ottica anche ad apparecchio montato.

La sorgente luminosa è a LED e a modulo integrato.
Il cavo elettrico unipolare è in acciaio zincato e rame argentato.
Per la versione con rosone (classe I) il driver è integrato e dimmerabile.
Per la versione senza rosone (classe III) il driver non è integrato, ma disponibile come accessorio.

Finish



.04 Matt Black






Custom finish available on request (tie rods and wall/ceiling driver only).

Finitura personalizzata su richiesta (solo per tiranti e alimentatore da parete/soffitto).

**OHM
with remote
driver version**

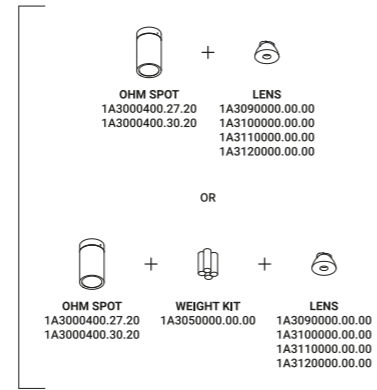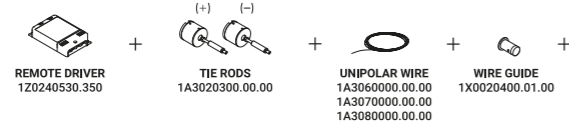

**OHM
with wall/ceiling
driver version**

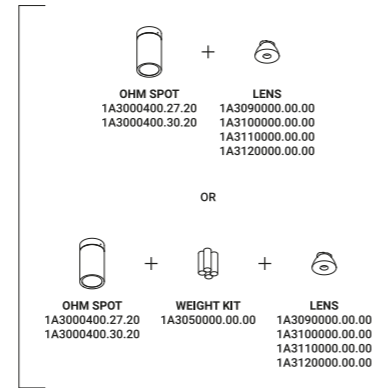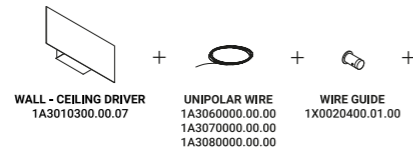

OHM SPOT

3,2W
Max 350mA DC
2700K / 3000K
CRI >95
Driver not included
CE IP20 E

Matt Black - 2700K	1A3000400.27.20
Matt Black - 3000K	1A3000400.30.20

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Tie rods / Tiranti		Not included
Matt White	2 Pieces	1A3020300.00.00




Unipolar wire - 12 m / Cavo unipolare - 12 m		Not included
	Max 60V DC	1A3060000.00.00


Unipolar wire - 24 m / Cavo unipolare - 24 m		Not included
	Max 60V DC	1A3070000.00.00

Unipolar wire - 48 m / Cavo unipolare - 48 m		Not included
	Max 60V DC	1A3080000.00.00

Drivers / Alimentatori



Driver / Alimentatore		Not included
220-240V(100-127V)	350mA/18W(18W)/IP20/DALI - PUSH - 1-10V	1Z0240530.350



Wall/ceiling driver / Alimentatore da parete/soffitto		Not included
Matt White	Input 100-240V - 50/60Hz Output 350mA - Max 4x3,2W - IP20 DALI - PUSH - 1-10V	1A3010300.00.07

Compulsory accessories / Accessori obbligatori


Other accessories / Altri accessori



Lens / Lente		Not included	
Beam - 14°	2700K - CRI >95 - 272lm	OHM SPOT	1A3090000.00.00
	3000K - CRI >95 - 288lm		
Beam - 24°	2700K - CRI >95 - 271lm	OHM SPOT	1A3100000.00.00
	3000K - CRI >95 - 286lm		
Beam - 36°	2700K - CRI >95 - 257lm	OHM SPOT	1A3110000.00.00
	3000K - CRI >95 - 273lm		
Beam - 50°	2700K - CRI >95 - 254lm	OHM SPOT	1A3120000.00.00
	3000K - CRI >95 - 270lm		

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Wall adapter plate / Piastra parete		Not included	
Matt White	For mounting on brick masonry walls		1A3030300.00.00




Wire guide / Guidacavo		Not included	
Matt Black	1 Piece		1X0020400.01.00




Weight kit for suspension version / Kit pesi per versione a sospensione		Not included	
	4 Pieces		1A3050000.00.00




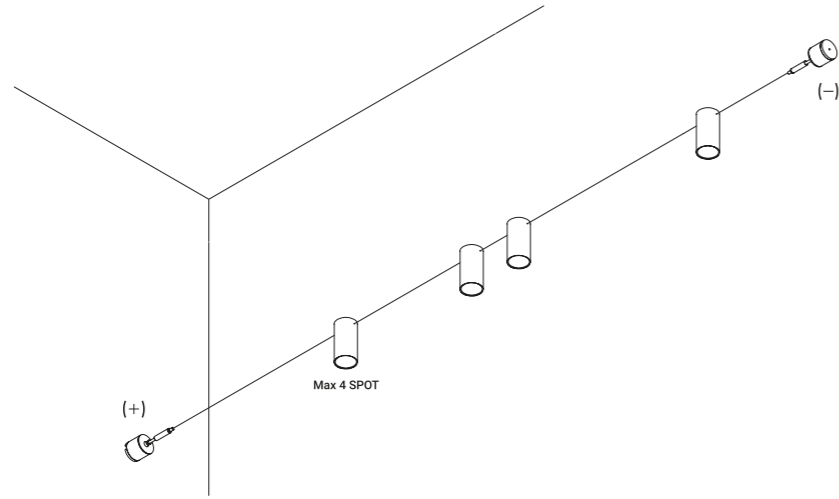

Remote driver version

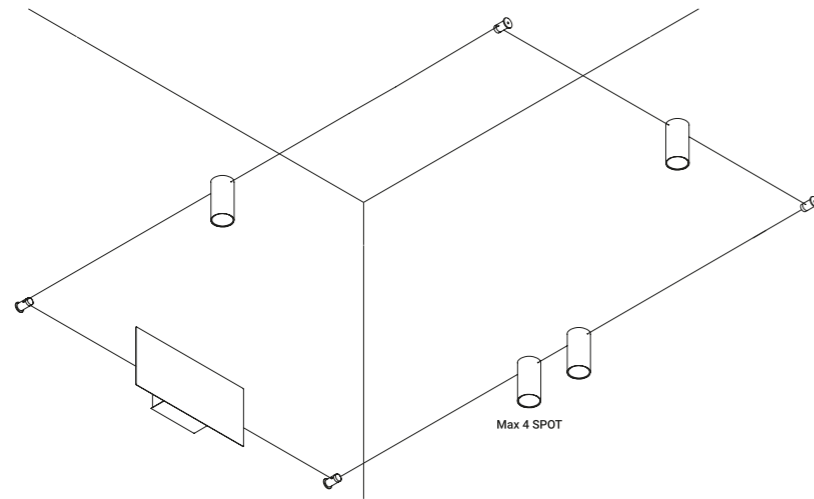

Wall/ceiling driver version

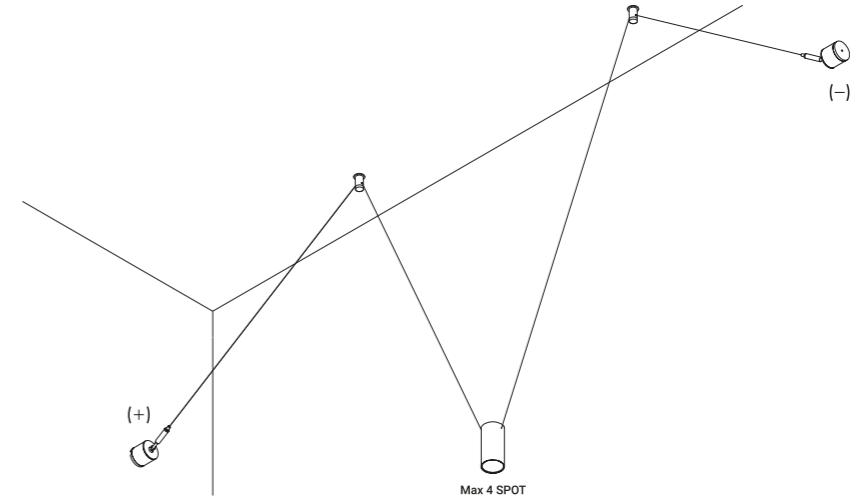

Suspension version