

Light runs on a wire. An almost imperceptible wire, suspended in space.



Like a tightrope walker on a thin rope, the light reaches everywhere, weightless and wonderful. Ohm is an electro mechanic project that takes maximum advantage of the characteristics of luminous diodes. Its secret is a special unipolar wire stretched from wall to wall. Where the light comes from is discreetly hidden, giving all the attention to what it is illuminating.

It is possible to replace the light source even with the luminaire assembled.



Luminaire designed also to be powered by ENDLESS conductive tape.

**Selection for ADI Design Index 2020**

Remote driver version

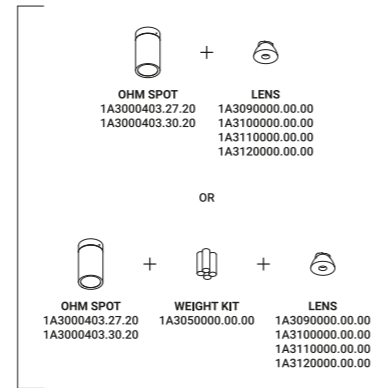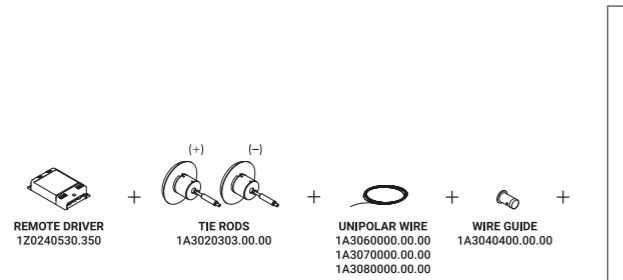


Wall/ceiling driver version

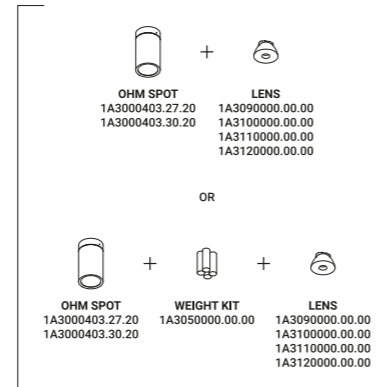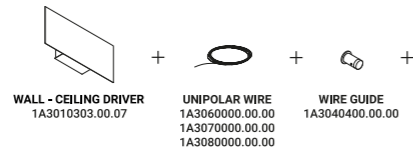

Systems / Direct / Indoor

**Material** Metal - PA  
**Finish** .04 Matt Black

**Note** Special unipolar wire stretched from wall to wall. Max 4 Spots. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.




**OHM SPOT**  
 3,2W  
 Max 350mA DC  
 2700K / 3000K  
 CRI >95  
 Driver not included

Matt Black - 2700K  
 Matt Black - 3000K

1A3000403.27.20  
 1A3000403.30.20

Compulsory accessories

Installation kits



<b>Tie rods (positive/negative)</b>				Not included
Matt White	2 Pieces		1A3020303.00.00	




<b>Unipolar wire - 472.44"</b>				Not included
	Max 60V DC		1A3060000.00.00	


<b>Unipolar wire - 944.88"</b>				Not included
	Max 60V DC		1A3070000.00.00	

<b>Unipolar wire - 1889.76"</b>				Not included
	Max 60V DC		1A3080000.00.00	

Drivers



<b>Driver</b>				Not included
220-240V(100-127V)	350mA/18W(18W)/IP20/DALI - PUSH - 1-10V		1Z0240530.350	



<b>Wall/ceiling driver</b>				Not included
Matt White			1A3010303.00.07	

Other accessories



<b>Lens</b>				Not included
Beam - 14°	2700K - CRI >95 - 272lm	OHM SPOT	1A3090000.00.00	
	3000K - CRI >95 - 288lm			
Beam - 24°	2700K - CRI >95 - 271lm	OHM SPOT	1A3100000.00.00	
	3000K - CRI >95 - 286lm			
Beam - 36°	2700K - CRI >95 - 257lm	OHM SPOT	1A3110000.00.00	
	3000K - CRI >95 - 273lm			
Beam - 50°	2700K - CRI >95 - 254lm	OHM SPOT	1A3120000.00.00	
	3000K - CRI >95 - 270lm			

Optional accessories

Installation kits




<b>Wire guide</b>				Not included
Matt Black	1 Piece		1A3040400.00.00	




<b>Weight kit for suspension version</b>				Not included
	4 Pieces		1A3050000.00.00	




<b>Power base for Endless</b>				Not included
Matt White			1A0810303.00.00	
Matt Black			1A0810403.00.00	

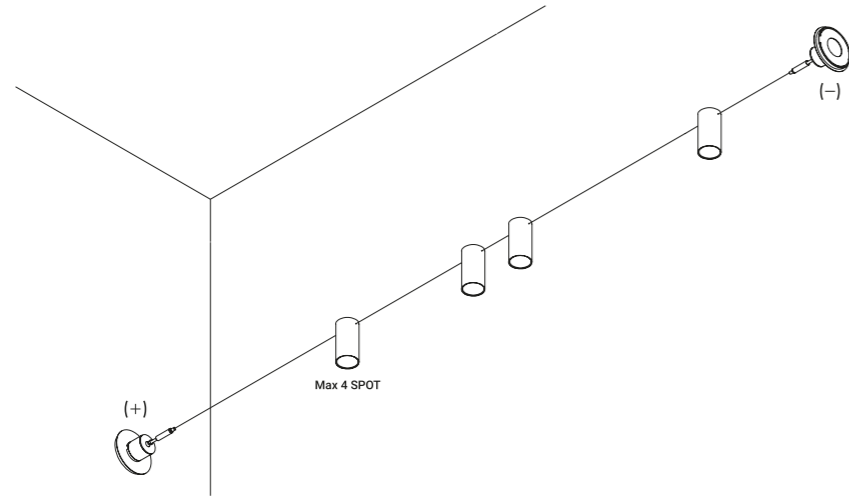

Remote driver version

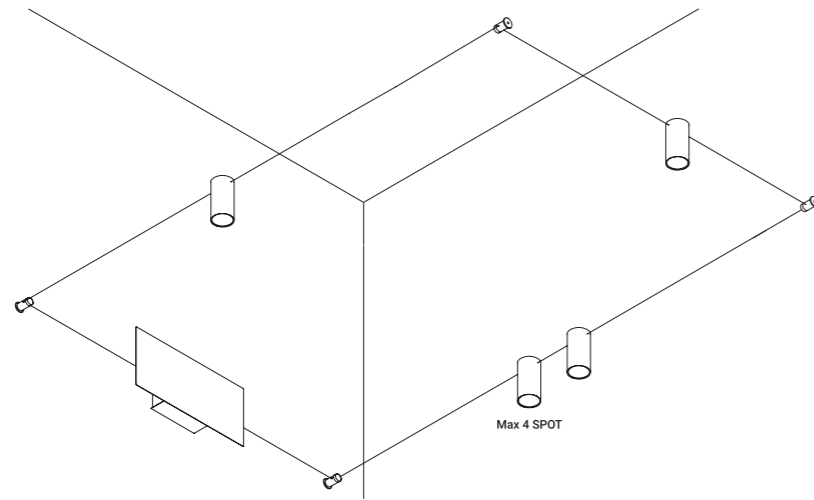

Wall/ceiling driver version

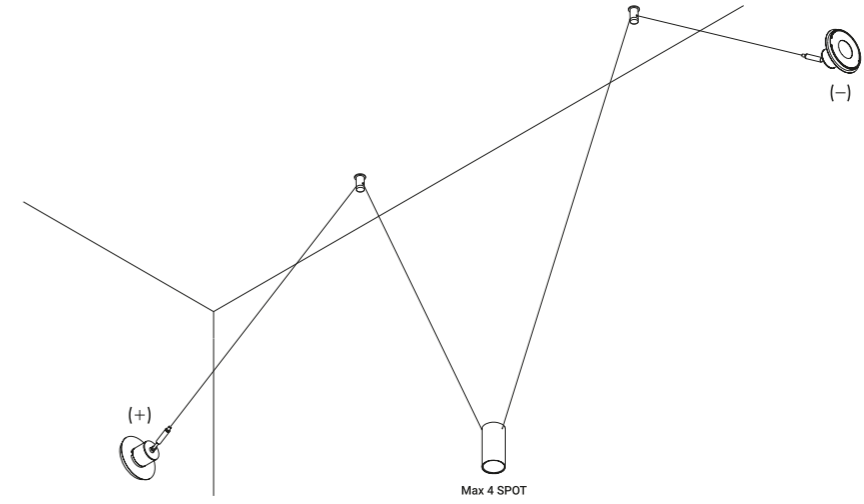

Suspension version