


The sizes are expressed in millimeters.

IP20

1A2800300.01.00	TRACK 1 m WHITE	EUROSTANDARD 6 CONDUCTORS TRACK SYSTEM L1/L2/L3/N/TERRA - 16S/440 V AC - 3,6 kVA/10,8 kVA D+/D - 2 x 1 A/50 V FELV AC (DALI)
1A2800400.01.00	TRACK 1 m BLACK	
1A2800300.02.00	TRACK 2 m WHITE	
1A2800400.02.00	TRACK 2 m BLACK	
1A2800300.03.00	TRACK 3 m WHITE	
1A2800400.03.00	TRACK 3 m BLACK	




INSTALLATION KITS


1A2800300.13.00	MATT WHITE	POWER RIGHT CONNECTOR
1A2800400.13.00	MATT BLACK	
1A2800300.12.00	MATT WHITE	POWER LEFT CONNECTOR
1A2800400.12.00	MATT BLACK	
1A2800300.07.00	MATT WHITE	END CAP
1A2800400.07.00	MATT BLACK	



POWER RIGHT CONNECTOR AND POWER LEFT CONNECTOR LAYOUT EXAMPLE




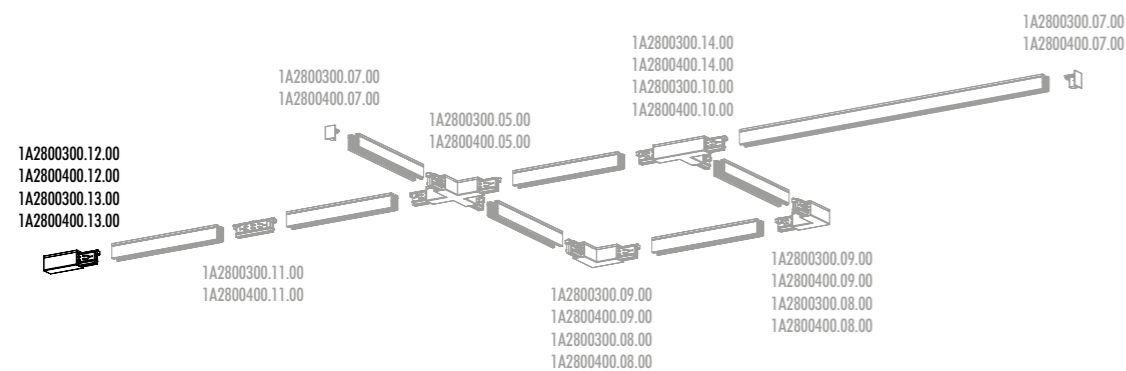


POWER INTERMEDIATE CONNECTOR LAYOUT EXAMPLE

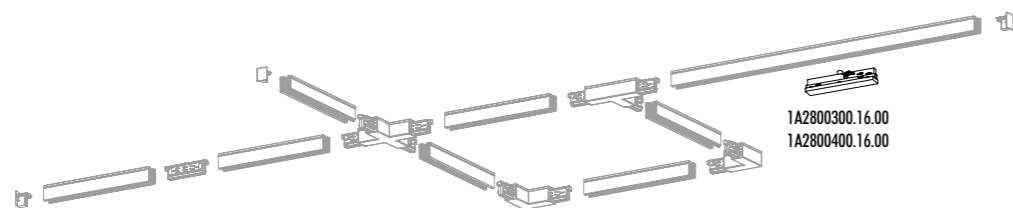

OPTIONAL INSTALLATION KITS

1A2800300.11.00	MATT WHITE	LINEAR CONNECTOR
1A2800400.11.00	MATT BLACK	
1A2800300.09.00	MATT WHITE	INTERNAL L CONNECTOR
1A2800400.09.00	MATT BLACK	
1A2800300.08.00	MATT WHITE	EXTERNAL L CONNECTOR
1A2800400.08.00	MATT BLACK	
1A2800300.14.00	MATT WHITE	RIGHT T CONNECTOR
1A2800400.14.00	MATT BLACK	
1A2800300.10.00	MATT WHITE	LEFT T CONNECTOR
1A2800400.10.00	MATT BLACK	
1A2800300.15.00	MATT WHITE	X CONNECTOR
1A2800400.15.00	MATT BLACK	
1A2800000.04.00	STANDARD H. 1500 mm	ADJUSTABLE SUSPENSION CABLE
1A2800000.05.00	STANDARD H. 3000 mm	
1A2800000.06.00	STANDARD H. 5000 mm	
1A2800000.17.00	STANDARD	CUTTING TOOL
1A2800300.16.00	MATT WHITE	POWER INTERMEDIATE CONNECTOR
1A2800400.16.00	MATT BLACK	






The sizes are expressed in millimeters.

DESIGN OMAR CARRAGLIA - DAVIDE GROPPI - 2015
CEILING LAMP - METAL - POLYCARBONATE



IP20

DOT SISTEMA 51




1A3710308.00.00	MATT WHITE - ON/OFF	220 V - 50 Hz - MAX 10 W LED - GU10 ADJUSTABLE COMPULSORY INSTALLATION SYSTEM NOT INCLUDED BULB NOT INCLUDED OPTIONAL BULB ACCESSORIES NOT INCLUDED
1A3710408.00.00	MATT BLACK - ON/OFF	

ACCESSORIES

50330500	LED BULBS - 3000K	220-240 V - 5,5 W - GU10 - 25° - 375 lm - CRI 97
51580210	SORAA LED BULBS MR16 - 2700K	230 V - 7,5 W - GU10 - 10° - 390 lm - CRI 95 - IGBT DIMMABLE
51580010	SORAA LED BULBS MR16 - 3000K	230 V - 7,5 W - GU10 - 10° - 410 lm - CRI 95 - IGBT DIMMABLE

OPTIONAL ACCESSORIES

51580020	FILTER - MR16 - 25°	"POINT SOURCE OPTICS" ACCESSORIES FOR UNIFORM AND HIGH INTENSITY BEAMS
51580030	FILTER - MR16 - 36°	
51580040	DARKLIGHT - MR16	

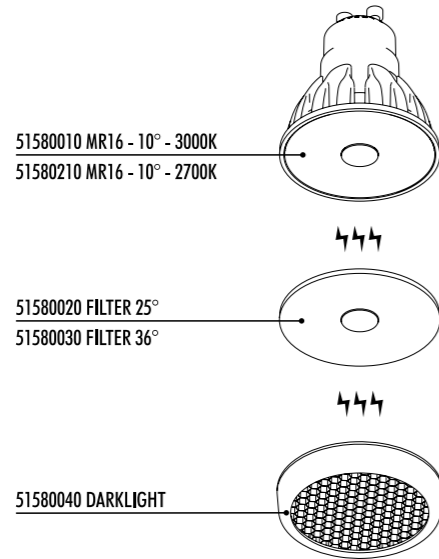

CODE	SOCKET	TENSION	WATTAGE	BEAM ANGLE (°)	TEMPERATURE (K)	SOURCE LUMENS	BULB EFFICIENCY	CRI (Ra)	DIMMABLE	PRODUCT REFERENCE	
LED BULBS											
	50330500	GU10	220-240 V	5,5 W	25°	3000K	375 lm	G	97	X	DOT P 51 DOT SISTEMA 51 MOON 60 DE
	50330790	E27	220-240 V	11,2 W	360°	2700K	1521 lm	D	90	X	MOON 60 MOON 60 DE MOON 80 MOON 200 MOON T
	50041470	E27	220-240 V	21 W	200°	2700K	2452 lm	E	>80	X	MOON 120
	50330730	E27	220-240 V	9,5 W	25°	3000K	760 lm	F	80	X	NEURO
SORAA LED BULBS MR16 - IGBT DIMMABLE											
	51580210	GU10	230 V	7,5 W	10°	2700K	390 lm	G	95	X	DOT P 51 DOT SISTEMA 51
	51580010	GU10	230 V	7,5 W	10°	3000K	410 lm	G	95	X	
"POINT SOURCE OPTICS" ACCESSORIES FOR UNIFORM AND HIGH INTENSITY BEAMS											
	51580020	FILTER - MR16		25°							DOT P 51 DOT SISTEMA 51
	51580030	FILTER - MR16		36°							
	51580040	DARKLIGHT - MR16		-							